



Paducah Gaseous Diffusion Plant
Classification Office/Technical Information Office (TIO)
and Operations Security (OPSEC) Release Form

To Be Completed by Person Requesting Release prior to submitting to
Classification Office/TIO/OPSEC

Date: 01/31/2020 Date Release is Required: 02/03/2020
Person Requesting Release: Jennifer Watson Phone Number: 5293
Mailing Address: FOUR RIVERS NUCLEAR PARTNERSHIP, LLC (FRNP) 5511 HOBBS RD, KEVIL, KY 42053
Organization: Business Services
Document Number: PAD-REG-1007 Number of Pages: 19
Accession Number (DMC only): N/A
Document Title/Date: Calendar Year 2010 Annual NESHAP Report

Author: LATA Kentucky Corporate Author: LATA Kentucky

Media (Check all that apply):

[X] Paper [] Photo [] Diskette [] Drawing [] Video [] CD/DVD [] Report/Letter [] Other:

Project Subcontract/Task Order: C11RPT

Requestor/Purpose of Release: public release

DO NOT WRITE BELOW THIS LINE - CLASSIFICATION OFFICE/TIO/DC/OPSEC USE ONLY

Classified [] Yes [X] No

UCNI [] Yes [X] No

ECI [] Yes [] No

OUO [] Yes [X] No

Type of Release (Check One)

[X] Public Release [] Internal Release Only [] Limited Release

Exemption/Reason (Check all that apply)

[] 3. Statutory [] 5. Privileged [] 7. Law Enforcement [] Other
[] 4. Commercial/Proprietary [] 6. Personal Privacy [] OPSEC

Other/Comments:

DC David Hayden Date 2-3-2020
TIO1 David Hayden Date 2-3-2020
Reviewing Official2 David Hayden Date 2-3-2020
OPSEC David Hayden Date 2-3-2020

1 Signature of Classification Officer or Technical Information Officer is required for public release reviews.

2 Signature of UCNI Reviewing Official is required for documents containing information in UCNI subject area.



Department of Energy

Portsmouth/Paducah Project Office
1017 Majestic Drive, Suite 200
Lexington, Kentucky 40513
(859) 219-4000

JUN 29 2011

Mr. Ken Lapierre, Acting Director
U.S. Environmental Protection Agency, Region 4
Air, Pesticides, and Toxics Management Division
61 Forsythe, Southwest
Atlanta, Georgia 30303-8960

PPPO-02-1221787-11B

Mr. John S. Lyons
Kentucky Division for Air Quality
200 Fair Oaks Lane
Frankfort, Kentucky 40601-1403

Mr. Reid Rosnick
U.S. Environmental Protection Agency Headquarters
Office of Radiation and Indoor Air
MS6608J, 1200 Pennsylvania Avenue, Northwest
Washington, DC 20460

Dear Mr. Lapierre, Mr. Lyons, and Mr. Rosnick:

SUBMISSION OF THE NATIONAL EMISSIONS STANDARDS FOR HAZARDOUS AIR POLLUTANTS ANNUAL REPORT FOR 2010 U.S. DEPARTMENT OF ENERGY EMISSIONS AT THE PADUCAH GASEOUS DIFFUSION PLANT (PAD-REG-1007)

Please find enclosed the calendar year 2010 Annual National Emissions Standards for Hazardous Air Pollutants Report, required by 40 *CFR* § 61, Subpart H. This report summarizes airborne radionuclide emissions from the Paducah Site, including both U.S. Department of Energy (DOE) and United States Enrichment Corporation (USEC) emissions for calendar year 2010. The total 2010 dose resulting from both DOE and USEC emissions was 0.016 mrem. This is well below the annual limit of 10 mrem per year. DOE emissions contribution to this total was 0.0008 mrem.

If you have any questions or require additional information, please contact Don Dihel at (270) 441-6824.

Sincerely,

A handwritten signature in black ink, appearing to read "Reinhard Knerr".

Reinhard Knerr
Paducah Site Lead
Portsmouth/Paducah Project Office

Enclosures:

1. Certification page
2. National Emissions Standards for Hazardous Air Pollutants Annual Report for 2010

e-copy w/enclosures:

alicia.scott@lataky.com, LATA/Kevil
brandy.mitchell@lataky.com, LATA/Kevil
christie.lamb@lataky.com, LATA/Kevil
don.dihel@lex.doe.gov, PPPO/PAD
gustavo.vazquez@hq.doe.gov, HS-22/FORS
john.lyons@ky.gov, KDAQ/Frankfort
john.morgan@lataky.com, LATA/Kevil
lapierre.kenneth@epa.gov, EPA/Atlanta
mbmattheiss@duf6.com, BWCS/PAD
myrna.redfield@lataky.com, LATA/Kevil
pad.dmc@swiftstaley.com, SST/Kevil
rees.lattimer@lataky.com, LATA/Kevil
reinhard.knerr@lex.doe.gov, PPPO/PAD
rob.seifert@lex.doe.gov, PPPO/PAD
rosnick.reid@epa.gov, EPA/HQ
tracey.duncan@lex.doe.gov, PPPO/LEX

CERTIFICATION

Document Identification: *National Emissions Standards for Hazardous Air Pollutants Annual Report for 2010 U.S. Department of Energy Emissions at the Paducah Gaseous Diffusion Plant (PAD-REG-1007)*

This LATA Environmental Services of Kentucky, LLC, and U.S. Department of Energy certification pertains to the following U.S. Department of Energy emission sources:

C-752-A Waste Activities
Northwest Plume Treatment Facility
Northeast Plume Treatment Facility
C-301, DOE Material Storage Area Outside 12
C-746-A East End Smelter
Fugitive and Diffuse Sources

I certify under penalty of law that I have personally examined and am familiar with the information submitted herein and based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information including the possibility of fine and imprisonment. (See 18 USC 1001.)

LATA Environmental Services of Kentucky, LLC




Mark J. Duff, Paducah Project Manager

6-27-11

Date Signed

I certify under penalty of law that I have personally examined and am familiar with the information submitted herein and based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information including the possibility of fine and imprisonment. (See 18 USC 1001.)

U.S. Department of Energy



Reinhard Knerr, Paducah Site Lead

6/28/11

Date Signed

**National Emissions Standards for Hazardous Air Pollutants
Annual Report for 2010 U.S. Department of Energy
Emissions at the Paducah Gaseous Diffusion Plant**

This document is approved for public release per review by:

Merlin Shum
LATA Kentucky Classification Support

6-29-2011
Date

**National Emissions Standards for Hazardous Air Pollutants
Annual Report for 2010 U.S. Department of Energy
Emissions at the Paducah Gaseous Diffusion Plant**

Date Issued—June 2011

Prepared for the
U.S. DEPARTMENT OF ENERGY
Office of Environmental Management

Prepared by
LATA ENVIRONMENTAL SERVICES OF KENTUCKY, LLC
managing the
Environmental Remediation Activities at the
Paducah Gaseous Diffusion Plant
under contract DE-AC30-10CC40020

CONTENTS

TABLES	iii
FIGURE	iii
ACRONYMS	iv
EXECUTIVE SUMMARY	ES-1
1. FACILITY DESCRIPTION	1
2. INTRODUCTION	1
3. SITE DESCRIPTION	1
4. DOE SOURCE HANDLING AND PROCESSING DESCRIPTION	2
4.1 NORTHWEST PLUME INTERIM REMEDIAL ACTION PROJECT	3
4.2 NORTHEAST PLUME CONTAINMENT SYSTEM	3
4.3 C-746-A EAST END SMELTER DEMOLITION	3
4.4 C-752-A WASTE MANAGEMENT ACTIVITIES	3
4.5 C-301 DOE MATERIAL STORAGE AREA OUTSIDE-12 METAL REDUCTION PROJECT	3
4.6 DEPLETED URANIUM HEXAFLUORIDE CONVERSION FACILITY	4
4.7 FUGITIVE AND DIFFUSE SOURCES	4
4.8 MISCELLANEOUS SOURCES	4
5. CONSTRUCTION AND MODIFICATION ACTIVITIES	4
6. DOE SOURCE CHARACTERISTICS AND AIR EMISSIONS DATA	4
7. DOSE ASSESSMENT	6
7.1 DESCRIPTION OF DOSE MODEL	6
7.2 SUMMARY OF INPUT PARAMETERS	6
7.3 DOSE ESTIMATE	7
8. UNPLANNED RELEASES	8
9. AMBIENT AIR MONITORING	8
10. STATUS OF 40 <i>CFR</i> § 61, SUBPART H, COMPLIANCE	8

TABLES

1. Emission Point Effluent Controls and Efficiencies	5
2. Distances to Selected Receptors	5
3. Characteristics of Stacks, Vents, or Other Emission Points that Emit Radionuclides.....	5
4. Radionuclide Materials and Emissions Data (Curies).....	6
5. Dose Analysis.....	7
6. Kentucky Radiation Health and Toxics Branch Ambient Air Monitoring Results	9

FIGURE

1. Location of Paducah Site Ambient Air Monitors.....	10
---	----

ACRONYMS

CAP-88	Clean Air Act Assessment Package-1988
<i>CFR</i>	<i>Code of Federal Regulations</i>
DOE	U.S. Department of Energy
EDE	Effective Dose Equivalent
EPA	U.S. Environmental Protection Agency
HEPA	high-efficiency particulate air
<i>KAR</i>	<i>Kentucky Administrative Regulations</i>
NESHAP	National Emission Standards for Hazardous Air Pollutants
PGDP	Paducah Gaseous Diffusion Plant
USEC	United States Enrichment Corporation

EXECUTIVE SUMMARY

The Kentucky Division for Air Quality regulates air emissions of radionuclides, other than radon, from the U.S. Department of Energy (DOE) facilities under 401 *KAR* 57:002. The U.S. Environmental Protection Agency (EPA) also regulates air emissions of radionuclides from DOE facilities under 40 *CFR* § 61, Subpart H. Submission of this report fulfills the annual reporting requirements of 40 *CFR* § 61.94.

DOE owns the Paducah Gaseous Diffusion Plant (PGDP), which has radionuclide air emissions from DOE operations. DOE leases a portion of the site to the United States Enrichment Corporation (USEC), whose operations also have radionuclide air emissions. DOE and USEC operations were included in the estimate of the Paducah Site resultant dose to the public; however, DOE certifies the information relating to its operation only. USEC submits a separate National Emission Standards for Hazardous Air Pollutants report relating to emissions from its activities.

The dose to the public is calculated using a computer modeling program (CAP-88) specified in 40 *CFR* § 61.93. Inputs to the computer program for both DOE and USEC sources are obtained through continuous monitoring, periodic confirmatory measurements, engineering estimates, emission factors, and other EPA-approved methods. Subpart H requires an annual compliance report covering site emissions from the previous year. This report meets the annual reporting requirements and establishes the total annual effective dose equivalent to the maximally exposed member of the public from both USEC and DOE emissions to be 0.016 mrem for calendar year 2010. This is well below the annual limit of 10 mrem per year. DOE emissions contribution to this total was 0.0008 mrem.

1. FACILITY DESCRIPTION

Site Name: Paducah Gaseous Diffusion Plant (PGDP)

Location: Paducah, Kentucky

Owner: U.S. Department of Energy
Portsmouth/Paducah Project Office
P.O. Box 1410
Paducah, Kentucky 42002-1410
Reinhard Knerr, Paducah Site Lead
(270) 441-6825

Operator: LATA Environmental Services of Kentucky, LLC
761 Veterans Avenue
Kevil, Kentucky 42053
Mark J. Duff, Paducah Project Manager
(270) 441-5030

2. INTRODUCTION

The U.S. Department of Energy (DOE) Paducah Site includes the PGDP, which is leased to the United States Enrichment Corporation (USEC). DOE manages the remaining, nonleased facilities at the Paducah Site. The DOE-managed facilities consist of various waste management facilities, inactive buildings, depleted uranium storage facilities, and environmental restoration facilities.

Emissions from both USEC and DOE activities were analyzed together. DOE certifies only the information related to its emissions. The results from the single combined analysis are presented in separate DOE and USEC National Emissions Standards for Hazardous Air Pollutants (NESHAP) reports. The reports have been separated to ease review and approval by the separate organizations.

3. SITE DESCRIPTION

PGDP is an active uranium enrichment facility consisting of a diffusion cascade system and extensive support facilities. The cascade system, including product and tails withdrawal, is housed in six large process buildings. The plant is located on a reservation consisting of approximately 3,500 acres in western McCracken County, 10 miles west of Paducah, Kentucky, and 3.5 miles south of the Ohio River. The facility is on approximately 1,350 acres with controlled access. Roughly 650 acres of the reservation are enclosed within a fenced security area. An uninhabited buffer zone of at least 400 yards surrounds the entire fenced area. During World War II, Kentucky Ordnance Works, a trinitrotoluene production facility, was operated in an area southwest of the plant on what is now a wildlife management area.

Construction of the PGDP facility began in 1951 and the plant was fully operational by 1955, supplying enriched uranium for commercial reactors and defense uses. Enriched uranium is defined as uranium in which the concentration of the fissionable uranium-235 (U-235) isotope has been increased from its

natural assay. Natural uranium is primarily uranium-238 (U-238), with about 0.71% U-235, and 0.0055% uranium-234 (U-234). Uranium mills process the ores to produce concentrated uranium oxide (U₃O₈), which then is converted commercially to uranium hexafluoride (UF₆). The UF₆ then is sent to PGDP for enrichment.

The radioactive materials used at PGDP are associated with enrichment of the uranium isotope, U-235, by utilizing a gaseous diffusion process [40 *CFR* § 61.94 (a) (2)]. During enriching operations from 1953 to 1975, UF₆ feed material derived from recycled uranium (called “reactor tails”) from government reactors also was used intermittently in addition to the UF₆ processed from uranium ore typically used. Reactor tails were the spent fuel from nuclear reactors that is depleted in U-235 content that had been reprocessed to remove most of the fission products. The reactor fuel assemblies were processed at other DOE facilities (where most of the fission products were removed) and the enriched uranium and the remaining fission products were fed into the PGDP cascade system in the chemical form of UF₆. Use of the reactor tails resulted in the introduction of technetium-99 (Tc-99), a fission by-product, and transuranics, most notably neptunium-237 (Np-237) and plutonium-239 (Pu-239), into the cascade.

The West Kentucky Wildlife Management Area and lightly populated farmlands are in the immediate environs of PGDP. Based on population data from the 2010 census, the population within a 50-mile radius is approximately 534,000 persons. Of these, 104,000 live within 20 miles of the plant. The unincorporated communities of Grahamville and Heath are 1.24 and 1.86 miles east of the plant, respectively. Portions of 28 counties, 11 of which are in Kentucky, 4 in Missouri, 10 in Illinois, and 3 in Tennessee, are included within the 50-mile radius of the plant. Larger cities in the region include Paducah, Kentucky, located 10 air miles east of the plant; Cape Girardeau, Missouri, located 40 air miles to the west; and Metropolis, Illinois, located 6 air miles to the northeast. The nearest neighbor residences in each direction are observed and entered into the dose modeling software.

Paducah is located in the humid continental zone. Summers generally are dry; precipitation occurs mainly in the spring and fall. Winters are characterized by moderately cold days; the average temperature during the coldest month, January, is about 35°F. Summers are warm and humid; the average temperature in July is 79°F. Yearly precipitation averages about 44 inches. The prevailing wind direction is south to southwest.

In July 1993, USEC was formed as a government corporation and became a private corporation in July 1998. Although DOE still owns all the facilities at PGDP, the uranium enrichment enterprise is now the responsibility of USEC.

4. DOE SOURCE HANDLING AND PROCESSING DESCRIPTION

The description of the handling and processing that the radioactive materials undergo with DOE operations at the Paducah Site is provided in the following sections. The radioactive materials handled were containerized waste, depleted uranium hexafluoride managed in cylinders, and radioactive contamination on equipment and facilities. The Paducah Site also has outdoor contamination areas.

4.1 NORTHWEST PLUME INTERIM REMEDIAL ACTION PROJECT

On September 1, 1995, DOE began operation of a treatment plant designed to remove trichloroethene and Tc-99 from contaminated groundwater at the PGDP. The facility, C-612, is located at the northwest corner of the PGDP site security area. The facility consists of an air stripper to remove volatile organics.

Historical sampling has shown very little change in the concentration of Tc-99 as the water passes through the air stripper. Emissions of Tc-99 were estimated using 40 *CFR* § 61, Subpart H, Appendix D, emission factors and the analysis of the groundwater. The exhaust from the air stripper is passed through a carbon adsorption unit prior to release to the atmosphere. Data has shown that Tc-99 is not retained in the carbon; therefore, no reduction in Tc-99 emissions due to the use of the adsorption unit was assumed. The results of the analysis of the estimated emissions are reported in Section 6.

4.2 NORTHEAST PLUME CONTAINMENT SYSTEM

DOE began normal operation of a second treatment system on February 28, 1997, as an interim remedial action to also treat contaminated groundwater. The system, C-614, extracts contaminated groundwater and pumps it to the C-637 Cooling Towers operated by USEC. Initially, the contaminated groundwater did not contain radionuclides; however, Tc-99 has been detected in the groundwater and, consequently, emitted to the air since 2005. Emissions of Tc-99 were estimated using 40 *CFR* § 61, Subpart H, Appendix D, emission factors and the analysis of the groundwater. The results of the analysis of the estimated emissions are reported in Section 6.

4.3 C-746-A EAST END SMELTER DEMOLITION

The C-746-A East End Smelter was demolished during 2010. It is speculated that fugitive airborne radionuclide emissions may have resulted from dust created by demolition and removal of the debris. The airborne concentration of radionuclides was estimated using emission factors in Appendix D of 40 *CFR* § 61.

4.4 C-752-A WASTE MANAGEMENT ACTIVITIES

Waste containing fine particulate radioactive material was repackaged. The particulate waste was repackaged in an enclosure within C-752-A. The ventilation for the enclosure passes through high-efficiency particulate air (HEPA) filters and then is exhausted through two stacks. The airborne concentration of radionuclides was estimated using emission factors in Appendix D of 40 *CFR* § 61.

4.5 C-301 DOE MATERIAL STORAGE AREA OUTSIDE-12 METAL REDUCTION PROJECT

Contaminated metal components were size reduced in DOE Material Storage Area Outside-12 to facilitate disposal. During 2010, it is conservatively speculated that there were fugitive airborne radionuclide emissions from dust created by size reduction and loading the metal into transportation containers. The amount of radionuclides released was estimated based on emission factors from the *Compilation of Air Emission Factors*, AP-42, U.S. Environmental Protection Agency (EPA), Fifth Edition, January 1995, updated annually.

4.6 DEPLETED URANIUM HEXAFLUORIDE CONVERSION FACILITY

Construction of a conversion facility to process depleted uranium hexafluoride was completed in 2010. Operation of the conversion facility is anticipated in 2011. The facility has an air permit but had not begun operation and, consequently, had no radioactive air emissions during 2010.

4.7 FUGITIVE AND DIFFUSE SOURCES

Diffuse/fugitive sources include any source that is distributed spatially, diffuse in nature, or not emitted with forced air from a stack, vent, or other confined conduit. Diffuse/fugitive sources also include emissions from sources where forced air is not used to transport the radionuclides to the atmosphere. In this case, radionuclides are transported entirely by diffusion and/or thermally driven air currents. Typical examples of diffuse/fugitive sources include emissions from building breathing; resuspension of contaminated soils, debris, or other materials; unventilated tanks; ponds, lakes, and streams; wastewater treatment systems; outdoor storage and processing areas; and leaks in piping, valves, or other process equipment. DOE has identified many potential fugitive and diffuse sources such as inactive facilities, building roofs, scrap metal storage yards, landfills, and various contamination areas. The use of ambient air monitors to evaluate emissions from fugitive and diffuse sources is described in Section 9.

4.8 MISCELLANEOUS SOURCES

DOE identified transport and disposal of contaminated materials in the C-746-U Landfill and decontamination of machinery and equipment used in remediation activities (e.g., well drilling) as miscellaneous sources. The use of ambient air monitors to evaluate emissions from these sources is described in Section 9. DOE understands that USEC will be submitting a separate NESHAP report addressing more detailed analysis of USEC emissions from USEC operations.

5. CONSTRUCTION AND MODIFICATION ACTIVITIES

Construction of a conversion facility to process depleted uranium hexafluoride was completed in 2010 in accordance with an air permit issued by the Kentucky Division for Air Quality. Operation of the conversion facility is anticipated in 2011. The facility had no radioactive air emissions during 2010.

No DOE construction or modification activities were waived under 40 *CFR* § 61.96.

6. DOE SOURCE CHARACTERISTICS AND AIR EMISSIONS DATA

Tables 1 through 4 contain specific emission information for each DOE emission point. Table 1 lists the emission points and efficiency of control devices as required by 40 *CFR* § 61.94 (a) (4) and (5). Table 2 lists the distances from each emission point to receptors of concern as listed in 40 *CFR* § 61.94 (a) (6). Table 3 contains emission point information required to estimate the resulting potential exposure as required by 40 *CFR* § 61.94 (a) (7). Table 4 contains a list of site radioactive materials and their emission rates as required by 40 *CFR* § 61.94 (a) (2).

Table 1. Emission Point Effluent Controls and Efficiencies

Minor Point and Area Sources	Type Control	Efficiency%
Northwest Plume Treatment Facility	None	0
Northeast Plume Treatment Facility	None	0
C-752-A Waste Management Activities	HEPA	99
C-746-A East End Smelter	None	0
C-301 OS-12	None	0

Table 2. Distances to Selected Receptors

Source Name	Distances (m) to Selected Receptors		
	Nearest Individual/Farm	Nearest Business	Nearest School
Northwest Plume Treatment Facility	1,080	2,550	5,150
Northeast Plume Treatment Facility	1,360	2,073	4,207
C-752-A Waste Management Activities	1,700	3,202	4,270
C-746-A East End Smelter	1,487	3,200	5,030
C-301 OS-12	1,554	2,490	4,565

Table 3. Characteristics of Stacks, Vents, or Other Emission Points that Emit Radionuclides

Source Name	Type	Height (m)	Diameter (m)	Gas Exit Velocity (m/s)	Gas Exit Temp. (°C)	Distance (m) & Direction to Maximally Exposed Individual for Each Source (MEI)
Northwest Plume Treatment Facility	Point	7.0	0.35	9.45	37.8	1,080 NNE
Northeast Plume Treatment Facility	Point	10.22	8.18	4.84	Ambient	1,360 SE
C-752-A Waste Management	Point	5.5	0.3	6.47	Ambient	1,700 N
C-746-A East End Smelter	Point	1	NA	0	Ambient	1,485 N
C-301 OS-12	Point	1	NA	0	Ambient	1,554 SE

Table 4. Radionuclide Materials and Emissions Data (Curies)

Nuclide	NW Plume Treatment Facility	NE Plume Treatment Facility	C-752-A Waste Management Activities	C-746-A East End Smelter Demolition	C-301 OS-12	Total
U-234	0	0	1.09E-07	1.16E-05	1.68E-06	1.34E-05
U-235	0	0	4.39E-09	1.00E-05	6.59E-08	1.01E-05
U-238	0	0	1.83E-07	2.07E-05	5.02E-07	2.14E-05
Tc-99	1.12E-04	9.36E-06	8.84E-06	1.92E-05	1.19E-05	1.61E-04
Th-230	0	0	4.28E-06	3.29E-06	0	7.57E-06
Th-232	0	0	2.48E-08	0	0	2.48E-08
Th-234	0	0	0	7.86E-05	0	7.86E-05
Np-237	0	0	4.47E-07	1.72E-07	1.64E-07	7.83E-07
Pu-238	0	0	1.91E-08	0	0	1.91E-08
Pu-239	0	0	9.22E-07	1.51E-06	1.43E-07	2.58E-06
Am-241	0	0	2.19E-07	2.24E-07	0	4.43E-07
Cs-137	0	0	1.49E-09	0	0	1.49E-09
Total Curies/Year	1.12E-04	9.36E-06	1.50E-05	1.45E-04	1.45E-05	2.96E-04

7. DOSE ASSESSMENT

7.1 DESCRIPTION OF DOSE MODEL

The radiation dose calculations were performed using the Clean Air Act Assessment Package-1988 (CAP-88) package of computer codes that were converted from the mainframe CAP-88 version. This package contains EPA's version of the AIRDOS-EPA computer code, which implements a steady-state, Gaussian plume, atmospheric dispersion model to calculate environmental concentrations of released radionuclides and then uses Regulatory Guide 1.109 food chain models to calculate human exposures, both internal and external, to the environmental concentrations. The human exposure values are then used by the EPA's version of the DARTAB computer code to calculate radiation doses to man from radionuclides released during the year. The dose calculations use dose conversion factors contained in the RADRISK data file, which is provided by EPA with the CAP-88 package. Selection of the dose conversion factors follows guidance given by EPA in its Federal Guidance Report No. 11.

7.2 SUMMARY OF INPUT PARAMETERS

Default input parameters are used except for those provided in Section 6 and immediately below. Meteorological input information is from the Paducah National Weather Service except for the on-site joint frequency distribution information. The average mixing layer height was derived from area upper air data from 2007 and supplied by Oak Ridge National Laboratory.

Joint frequency distribution: Five-year STAR distribution from 60-meter station on PGDP meteorological tower for the years 1988 through 1992.

Rainfall rate: 125 centimeters/year

Average air temperature: 14.2°C

Average mixing layer height: 659 m

Fraction of foodstuffs from (rural default values):

	<u>Local Area</u>	<u>50-Mile Radius</u>	<u>Beyond 50 Miles</u>
Vegetables and produce:	0.700	0.300	0.000
Meat:	0.442	0.558	0.000
Milk:	0.399	0.601	0.000

7.3 DOSE ESTIMATE

Effective dose equivalent (EDE) to maximally exposed individual for each individual source and the plant is provided in Table 5. The dose estimate is based on both the DOE and USEC sources combined (data provided by USEC).

Table 5. Dose Analysis

USEC Emission Sources¹	Dose to the Maximum Exposed Individual for Each Source (mrem)	Dose to the Maximum Exposed Individual for the Plant (mrem)
C-400 Group	2.9E-03	2.9E-03
C-400 Cylinder Drying Station	1.2E-05	1.2E-05
C-709/C-710 Laboratory Hoods	2.7E-04	2.7E-04
C-310 Stack	7.2E-03	7.2E-03
Seal Exhaust/Wet Air Group	4.4E-03	4.4E-03
C-409 Dissolver	2.1E-07	2.1E-07
C-360	1.2E-04	5.1E-05
Total From USEC Sources	N/A	1.5E-02
DOE Emission Sources		
Northwest Plume Treatment Facility	1.9E-05	1.9E-05
Northeast Plume Treatment Facility	5.7E-07	4.3E-07
C-752-A Waste Activities	3.6E-04	3.6E-04
C-746-A East End Smelter Demolition	4.3E-04	4.3E-04
C-301 OS-12	2.3E-05	1.0E-05
Total From DOE Sources	N/A	8.2E-04
Total From All Sources	N/A	1.6E-02

The maximally exposed individual from all plant emissions is located 2,040 m north of the C-310 stack (a USEC source).

¹ Certified by USEC in its annual report.

Based on population data from the 2010 census, the total collective EDE to the 50-mile population (approximately 534,000 persons) was 0.1 person-rem.

8. UNPLANNED RELEASES

There were no DOE unplanned releases in 2010.

9. AMBIENT AIR MONITORING

In accordance with the *Paducah Gaseous Diffusion Plant Department of Energy National Emission Standards for Hazardous Air Pollutants (NESHAP) Management Plan*, BJC/PAD-141, February 2000, DOE utilized ambient air monitoring data to verify insignificant levels of radionuclides in off-site ambient air. Ambient air stations collect radionuclide samples at sites surrounding the plant. The ambient air monitors capture airborne radionuclides emitted from all sources including fugitive and diffuse sources. The Radiation/Environmental Monitoring Section of the Radiation Health Branch of the Department for Public Health of the Kentucky Cabinet for Health and Family Services operates the ambient air monitors as an independent program. DOE is including the ambient monitoring results in this report, but DOE is not responsible for and does not certify the quality of the data.

The Radiation Health Branch reports that air filters were screened weekly for gross alpha and beta activity and then composited on a quarterly basis. The quarterly composites were analyzed by gamma spectroscopy using a thin window 40% high purity germanium detector, which allows for detection of low-energy gamma emitters. Americium-241 (Am-241) and thorium-234 (Th-234) were not detected by gamma spectroscopy for the quarterly composites.

In accordance with the Radiation Health Branch's protocol, plutonium and uranium isotopic analyses were performed on the quarterly composites. The quarterly composites also were analyzed for Tc-99, which was not detected.

The ambient air monitoring conducted by the Kentucky Radiation Health Branch did not detect plant-derived radionuclides above background levels. The actual results of each air monitoring station are listed in Table 6 of this report.

Locations of the ambient air monitoring stations are shown in Figure 1.

10. STATUS OF 40 CFR § 61, SUBPART H, COMPLIANCE

DOE has remained in compliance with 40 CFR § 61, Subpart H, since 1993. Kentucky Division for Air Quality received a delegation of authority to administer the NESHAP program in July 1999. A NESHAP Management Plan has been developed by DOE that addresses fugitive and diffuse emissions. EPA Region 4 concurred with the DOE NESHAP Management Plan on September 19, 2000. In accordance

Table 6. Kentucky Radiation Health and Toxics Branch Ambient Air Monitoring Results^{2,3}
Ambient Air Station

Qtr	Nuclide	AMSW017	AMW015	AMNW001	AMNE	AME002	AME012	AMBKG2	AMBOLD	AMKOW	AMMWNE	TRPBLK
		Ci/m ³	Ci/m ³	Ci/m ³	Ci/m ³	Ci/m ³	Ci/m ³	Ci/m ³	Ci/m ³	Ci/m ³	Ci/m ³	Ci/m ³
1	Am-241	-2.38E-18	-2.51E-18	-7.39E-16	-7.78E-16	-4.31E-15	-1.08E-18	-1.97E-15	-8.78E-17	-2.25E-15	-4.42E-15	-7.21E-16
	Np-237	8.46E-17	6.87E-17	1.84E-16	1.73E-16	-1.39E-16	5.33E-16	1.03E-16	-1.06E-17	2.77E-17	5.10E-16	7.64E-17
	Tc-99	-1.09E-16	-3.35E-17	8.13E-17	-4.53E-16	-4.98E-16	-5.36E-16	-6.18E-16	7.30E-17	-3.07E-17	-2.62E-16	-5.01E-17
	U-238/Th-234	8.20E-17	7.48E-17	4.77E-17	8.43E-17	8.13E-17	1.77E-17	5.11E-17	1.58E-16	5.02E-17	9.19E-17	4.60E-17
2	Am-241	-2.23E-17	-2.12E-15	-8.38E-16	-6.94E-17	-2.15E-15	-9.11E-16	-1.91E-17	1.15E-16	-1.94E-15	-6.28E-15	-4.41E-15
	Np-237	-1.80E-16	-2.27E-16	-3.79E-16	1.25E-16	2.47E-16	-3.10E-17	-6.10E-17	1.27E-16	-5.32E-16	6.85E-16	-5.18E-17
	Tc-99	3.02E-16	2.90E-16	2.18E-16	2.22E-16	4.26E-16	3.45E-16	-2.99E-17	2.60E-16	3.19E-16	-9.94E-17	-1.76E-16
	U-238/Th-234	2.75E-17	4.39E-17	1.59E-17	9.24E-17	8.24E-17	4.80E-17	3.55E-17	1.09E-16	2.20E-17	4.93E-17	2.90E-17
3	Am-241	-7.84E-16	-5.28E-15	-7.86E-16	-5.15E-15	-2.05E-15	-7.10E-16	-5.26E-15	-1.87E-15	-1.24E-15	-4.96E-15	-2.50E-15
	Np-237	-4.50E-16	2.20E-16	-1.87E-16	9.67E-16	3.40E-16	2.81E-16	-3.95E-16	3.58E-16	-1.69E-16	-1.58E-16	-2.62E-16
	Tc-99	5.58E-16	5.75E-16	8.63E-16	2.92E-16	2.46E-16	4.88E-16	5.60E-16	5.81E-16	5.04E-16	3.27E-16	3.09E-16
	U-238/Th-234	9.51E-18	1.86E-17	7.10E-17	3.79E-17	6.02E-17	4.49E-17	3.74E-17	6.51E-17	7.01E-17	7.47E-17	9.97E-18
4	Am-241	-5.56E-16	-5.02E-15	-2.54E-15	-2.73E-15	3.09E-17	5.29E-18	4.50E-17	-6.72E-16	-2.87E-15	-4.08E-17	-2.59E-15
	Np-237	-3.37E-16	-4.21E-16	2.04E-16	-8.19E-18	4.23E-17	-8.12E-17	-1.21E-16	3.09E-16	-2.09E-16	-5.29E-16	-1.18E-16
	Tc-99	1.19E-16	5.54E-17	-2.62E-16	2.28E-16	2.69E-16	1.03E-17	2.61E-17	-1.74E-17	7.25E-17	-6.11E-17	-1.631E-16
	U-238/Th-234	-2.51E-17	1.02E-17	1.86E-17	6.74E-17	7.78E-17	7.33E-17	4.39E-17	1.35E-16	1.97E-17	2.33E-17	-7.90E-17

² All results are below the applicable limiting values of 40 CFR § 61, Table 2 (see footnote 3).

³ 40 CFR § 61, Table 2, Limiting Values (Ci/m³): Am-241, 1.9E-15; Np-237, 1.2E-15; Tc-99, 1.4E-13; Th-234, 2.2E-12; and U-238, 8.3E-15.

with the management plan, ambient air monitoring was utilized to verify compliance of the Paducah Site with 40 *CFR* § 61, Subpart H, for all emissions. Ambient air monitoring conducted by the Kentucky Radiation Health Branch did not detect plant derived radionuclides above background levels during calendar year 2010; therefore, the facility is in compliance with 40 *CFR* § 61, Appendix E, Table 2 values, and the management plan.

Based on the results included in this report, during 2010, the Paducah Site was in compliance with 40 *CFR* § 61, Subpart H, for all airborne radionuclide emissions.

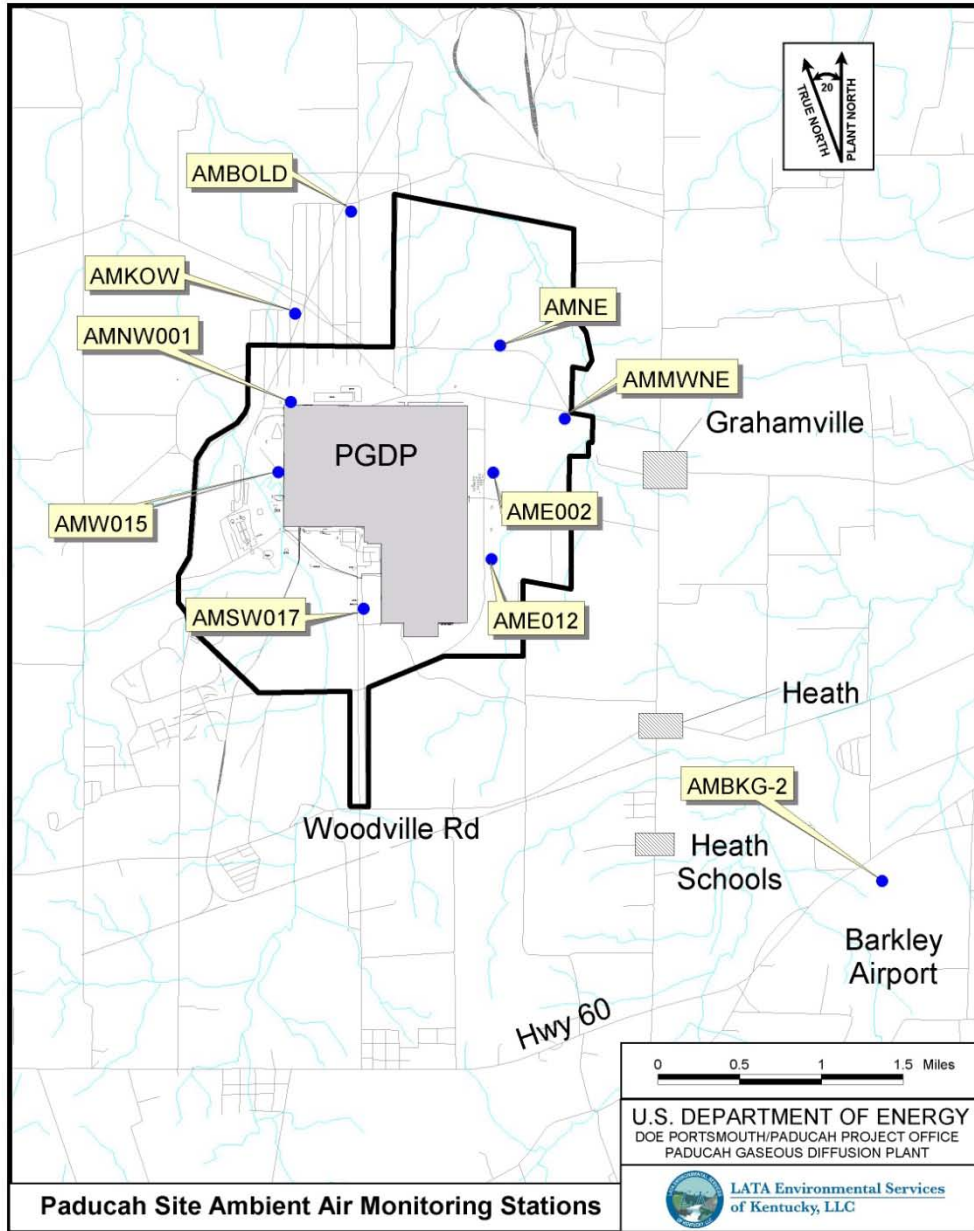


FIGURE No. c5ac9000sk640r1.apr
DATE 05-18-11

Figure 1. Location of Paducah Site Ambient Air Monitors