



Department of Energy

Portsmouth/Paducah Project Office
1017 Majestic Drive, Suite 200
Lexington, Kentucky 40513
(859) 219-4000

DEC 10 2013

Mr. Todd Mullins
Federal Facility Agreement Manager
Division of Waste Management
Kentucky Department for Environmental Protection
200 Fair Oaks Lane, 2nd Floor
Frankfort, Kentucky 40601

PPPO-02-2081332-14

Ms. Jennifer Tufts
Federal Facility Agreement Manager
U.S. Environmental Protection Agency, Region 4
61 Forsyth Street
Atlanta, Georgia 30303

Dear Mr. Mullins and Ms. Tufts:

**TRANSMITTAL OF THE FINAL CHARACTERIZATION REPORT FOR SOLID
WASTE MANAGEMENT UNITS 211-A AND 211-B VOLATILE ORGANIC
COMPOUND SOURCES FOR THE SOUTHWEST GROUNDWATER PLUME AT THE
PADUCAH GASEOUS DIFFUSION PLANT, PADUCAH, KENTUCKY
(DOE/LX/07-1288&D2)**

Please find enclosed for your review and approval is the D2 *Final Characterization Report for Solid Waste Management Units 211-A and 211-B Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, DOE/LX/07-1288&D2. This D2 document incorporates the comments on the D1 version of this document received from the U.S. Environmental Protection Agency on September 13, 2013, and the Kentucky Division of Waste Management on September 24, 2013.

If you have any questions or require additional information, please contact David Dollins at (270) 441-6819.

Sincerely,

A handwritten signature in cursive script, reading "Jennifer Woodard", is written over the typed name.

Jennifer Woodard
Federal Facility Manager
Portsmouth/Paducah Project Office


Enclosures:

1. Final Characterization Report–Clean Version
2. Final Characterization Report –Redline Version
3. Comment Response Summary for U.S. Environmental Protection Agency Comments
4. Comment Response Summary for Kentucky Division of Waste Management Comments

e-copy w/enclosures:

brandy.mitchell@lataky.com, LATA/Kevil
brian.begley@ky.gov, KDEP/Frankfort
craig.jones@lataky.com, LATA/Kevil
darla.bowen@lataky.com, LATA/Kevil
david.dollins@lex.doe.gov, PPPO/PAD
gaye.brewer@ky.gov, KDEP/PAD
jeff.carman@lataky.com, LATA/Kevil
jeffrey.gibson@ky.gov, KDEP/Frankfort
jennifer.woodard@lex.doe.gov, PPPO/PAD
jessica.lemus@lataky.com, LATA/Kevil
john.morgan@lataky.com, LATA/Kevil
leo.williamson@ky.gov, KDEP/Frankfort
mark.duff@lataky.com, LATA/Kevil
mike.guffey@ky.gov, KDEP/Frankfort
myrna.redfield@lataky.com, LATA/Kevil
pad.dmc@swiftstaley.com, SST/Kevil
rachel.blumenfeld@lex.doe.gov, PPPO/PAD
reinhard.knerr@lex.doe.gov, PPPO/PAD
rob.seifert@lex.doe.gov, PPPO/PAD
stephaniec.brock@ky.gov, KYRHB/Frankfort
todd.mullins@ky.gov, KDEP/Frankfort
tracey.duncan@lex.doe.gov, P2S/PAD
tufts.jennifer@epamail.epa.gov, EPA/Atlanta

**Final Characterization Report for Solid Waste
Management Units 211-A and 211-B Volatile Organic
Compound Sources for the Southwest Groundwater Plume
at the Paducah Gaseous Diffusion Plant,
Paducah, Kentucky**

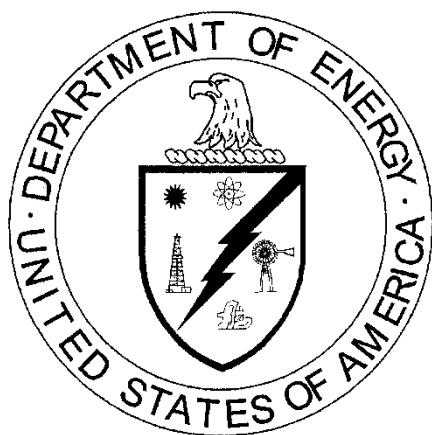

CLEARED FOR PUBLIC RELEASE

**Final Characterization Report for Solid Waste
Management Units 211-A and 211-B Volatile Organic
Compound Sources for the Southwest Groundwater Plume
at the Paducah Gaseous Diffusion Plant,
Paducah, Kentucky**

Date Issued—December 2013

U.S. DEPARTMENT OF ENERGY
Office of Environmental Management

Prepared by
LATA ENVIRONMENTAL SERVICES OF KENTUCKY, LLC
managing the
Environmental Remediation Activities at the
Paducah Gaseous Diffusion Plant
under contract DE-AC30-10CC40020

CLEARED FOR PUBLIC RELEASE

THIS PAGE INTENTIONALLY LEFT BLANK

CONTENTS

FIGURES	v
TABLES	v
ACRONYMS	vii
EXECUTIVE SUMMARY	ix
1. PROJECT DESCRIPTION.....	1
2. SITE BACKGROUND.....	7
2.1 SITE DESCRIPTION	7
2.2 REGIONAL GEOLOGY AND HYDROGEOLOGY	7
2.3 STUDY AREA GEOLOGY AND HYDROGEOLOGY	10
2.4 CONTAMINANT HISTORY.....	10
2.5 CONCEPTUAL SITE MODELS	11
3. DATA QUALITY OBJECTIVES	15
4. FINAL CHARACTERIZATION/RDSI PLANNING.....	21
4.1 EVALUATION OF EXISTING DATA	21
4.2 INITIAL SAMPLING LOCATIONS	21
4.3 DQO SCOPING MEETING.....	21
4.4 SITE WALKDOWNS	21
4.5 HEALTH AND SAFETY	25
4.6 SOIL SAMPLING STRATEGY	25
4.7 MONITORING WELL INSTALLATION.....	25
4.8 INVESTIGATION-DERIVED WASTE	29
4.9 DATA EVALUATION	29
4.10 DATA ASSESSMENT AND VERIFICATION	32
4.11 UNCERTAINTY EVALUATION	33
4.12 THREE-DIMENSIONAL ANALYSIS	36
5. SWMU 211-A RDSI SAMPLE RESULTS.....	39
5.1 LITHOLOGY	39
5.2 SOIL SAMPLE RESULTS.....	39
5.3 GROUNDWATER SAMPLE RESULTS	45
5.4 SWMU 211-A HU HYDROLOGIC ANALYSIS	53
6. SWMU 211-B RDSI SAMPLE RESULTS	55
6.1 LITHOLOGY	55
6.2 SOIL SAMPLING RESULTS.....	55
6.3 GROUNDWATER SAMPLE RESULTS	59
6.4 SWMU 211-B HU HYDROLOGIC ANALYSIS	63
7. SWMU 211-A DATA EVALUATION AND ASSESSMENT.....	67
8. SWMU 211-B DATA EVALUATION AND ASSESSMENT	73

9. CONCLUSION.....	79
10. REFERENCES	81
APPENDIX A: MONITORING WELL CONSTRUCTION LOGS	A-1
APPENDIX B: THREE-DIMENSIONAL CONTAMINATION MODELS (CD).....	B-1
APPENDIX C: MODEL SENSITIVITY ANALYSES	C-1
APPENDIX D: SOIL LITHOLOGY LOGS	D-1
APPENDIX E: SUMMARY OF SOILS VOC DATA FOR SWMU 211-A	E-1
APPENDIX F: HYDRAULIC CONDUCTIVITY AND GRAIN SIZE TESTS	F-1
APPENDIX G: SUMMARY OF SOILS VOC DATA FOR SWMU 211-B	G-1

FIGURES

ES.1.	SWMU 211-A and SWMU 211-B Sampling Locations.....	xi
1.	Regional Location Map.....	3
2.	SWMU 211-A and 211-B Location Map.....	4
3.	Conceptual Model for the C-720 Building TCE Source Areas.....	12
4.	SWMU 211-A Soil Sample Locations.....	23
5.	SWMU 211-B Soil Sample Locations.....	24
6.	SWMU 211-A Soil VOC Results	43
7.	SWMU 211-A and SWMU 211-B Groundwater VOC Data.....	51
8.	SWMU 211-B Soil TCE Results	57
9.	SWMU 211-A Cross-Section with TCE Isopleths and Hydrologic Units.....	69
10.	SWMU 211-B Cross-Section with TCE Isopleths and Hydrologic Units	75

TABLES

ES.1.	RDSI Groundwater Results (September and October 2012) for all MWs at SWMU 211-A	xiv
ES.2.	RDSI Groundwater Results (September and October 2012) for all MWs at SWMU 211-B.....	xvi
1.	Summary of the DQO Process for the Southwest Plume Source Areas RDSI	17
2.	PGDP Plant Coordinates for SWMU 211-A Source Area Sampling Locations.....	26
3.	PGDP Plant Coordinates for SWMU 211-B Source Area Sampling Locations.....	27
4.	PGDP SWMU 211-A Well Construction Details	28
5.	PGDP SWMU 211-B Well Construction Details	28
6.	Soils VOC Data (Average Borehole Concentration) for SWMU 211-A.....	40
7.	Summary of Soils TOC Data for SWMU 211-A.....	45
8.	Summary of Groundwater Metals, VOCs, and Dissolved Gases Data for SWMU 211-A.....	47
9.	Summary of Hydrologic Unit Hydraulic Conductivities for SWMU 211-A.....	53
10.	Soils VOC Data (Average Borehole Concentration) for SWMU 211-B	56
11.	Summary of Soils TOC Data for SWMU 211-B	59
12.	Summary of Groundwater Metals, VOCs, and Dissolved Gases Data for SWMU 211-B	61
13.	Summary of Hydrologic Unit Hydraulic Conductivities for SWMU 211-B	65

THIS PAGE INTENTIONALLY LEFT BLANK

ACRONYMS

CSM	conceptual site model
<i>Dhc</i>	<i>Dehalococcoides mccartyi</i>
DNAPL	dense nonaqueous-phase liquid
DOE	U.S. Department of Energy
DPT	direct push technology
DQO	data quality objective
DSS	Decision Support Software
EPA	U.S. Environmental Protection Agency
EVS-ES	Environmental Visualization Systems Expert System
FCR	final characterization report
FFS	focused feasibility study
GSD	grain size distribution
HU	hydrogeologic unit
ID	inside diameter
KOW	Kentucky Ordnance Works
LATA Kentucky	LATA Environmental Services of Kentucky, LLC
LCD	Lower Continental Deposits
LCS	laboratory control sample
LCSD	laboratory control sample duplicate
LUC	land use control
MCL	maximum contaminant level
MS	matrix spike
MSD	matrix spike duplicate
MW	monitoring well
OREIS	Oak Ridge Environmental Information System
OU	operable unit
PGDP	Paducah Gaseous Diffusion Plant
PID	photoionization detector
QAPP	quality assurance program plan
RDWP	remedial design work plan
RDSI	remedial design support investigation
RPD	relative percent difference
RGA	Regional Gravel Aquifer
RI	remedial investigation
ROD	record of decision
SI	site investigation
SWMU	solid waste management unit
UCD	Upper Continental Deposits
UCRS	Upper Continental Recharge System
VC	vinyl chloride
VOC	volatile organic compound
WAG	waste area group

THIS PAGE INTENTIONALLY LEFT BLANK

EXECUTIVE SUMMARY

This Final Characterization Report (FCR) presents the results of the remedial design support investigation (RDSI) for solid waste management units (SWMUs) 211-A and 211-B. Requirements for the RDSI are outlined in the *Remedial Design Work Plan for Solid Waste Management Units 1, 211-A, 211-B, Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky* (DOE 2012a) (RDWP). The RDSI was performed to better determine the lateral and vertical extent and distribution of volatile organic compounds (VOCs) and source material in the Southwest Plume source areas and to determine soil and groundwater parameters, including geochemical parameters, at each of the SWMUs to be used to design *in situ* bioremediation, if this alternative is selected. Soil sampling focused on soils in hydrogeologic units (HUs) HU1, HU2, HU3, and HU4 within the Upper Continental Deposits (UCD) and previously identified potential trichloroethene (TCE) source areas northeast and southeast of the C-720 Building. The Focused Feasibility Study (DOE 2011) identified a number of alternatives to remediate SWMU 211-A and 211-B, but ultimately concluded that the appropriate alternative would require an RDSI to provide sufficient information as a basis to select a remedial alternative. The selected remedy, as identified in the Record of Decision (ROD) for SWMUs 211-A and 211-B, pending this final characterization of source extent and magnitude, is enhanced *in situ* bioremediation with interim land use controls (LUCs) (Alternative 8) or long-term monitoring with interim LUCs (Alternative 2).

SWMU 211-A RDSI SUMMARY

Soil samples were collected from 42 boring locations at SWMU 211-A (Figure ES.1). [Note: the RDWP (DOE 2012a) allotted a total of up to 41 planned and contingency soil borings to characterize TCE levels in soil at SWMU 211-A. DOE sampled an additional soil boring to better characterize the extent of the VOC contamination.] Between 12 and 13 soil samples were collected and analyzed at each boring. Grain size distribution (GSD) analysis was performed on select soil samples. Soil sample analytical results, which were used to further evaluate the magnitude and extent of VOCs at SWMU 211-A, are summarized below.

- The average soil boring TCE concentration (based upon the 12 to 13 collected soil samples per soil boring location) was 122 micrograms per kilogram ($\mu\text{g/kg}$), exceeding the TCE soil remediation goal of 75 $\mu\text{g/kg}$ as identified in the RDWP (DOE 2012a). The maximum individual soil sample TCE concentration detected was 4,800 $\mu\text{g/kg}$. The areal extent of TCE is defined to the east, west, north, and south.
- Average TCE levels in soil exceeded the remediation goal (75 $\mu\text{g/kg}$) in 12 of the 42 soil borings (29%). The average TCE level among all samples in these 12 soil borings was 380 $\mu\text{g/kg}$.¹

Using the three-dimensional analysis software Environmental Visualization Systems Expert System (EVS-ES) and a 90% maximum source volume confidence level statistical evaluation, the estimated total TCE volume is approximately 2.2 gal over an areal extent of approximately 34,000 square feet (ft^2) area. The area of 90% confidence level that TCE levels exceed 75 $\mu\text{g/kg}$ in part of the soil column extends a maximum of 140 ft in the north-to-south direction (plant coordinate system) and 350 ft in the east-to-west direction (plant coordinate system).

¹ The average TCE level among all samples excludes the lower analysis for depth intervals where duplicate analyses are available and uses one-half of the laboratory reporting limit for “U” qualified analyses.

THIS PAGE INTENTIONALLY LEFT BLANK

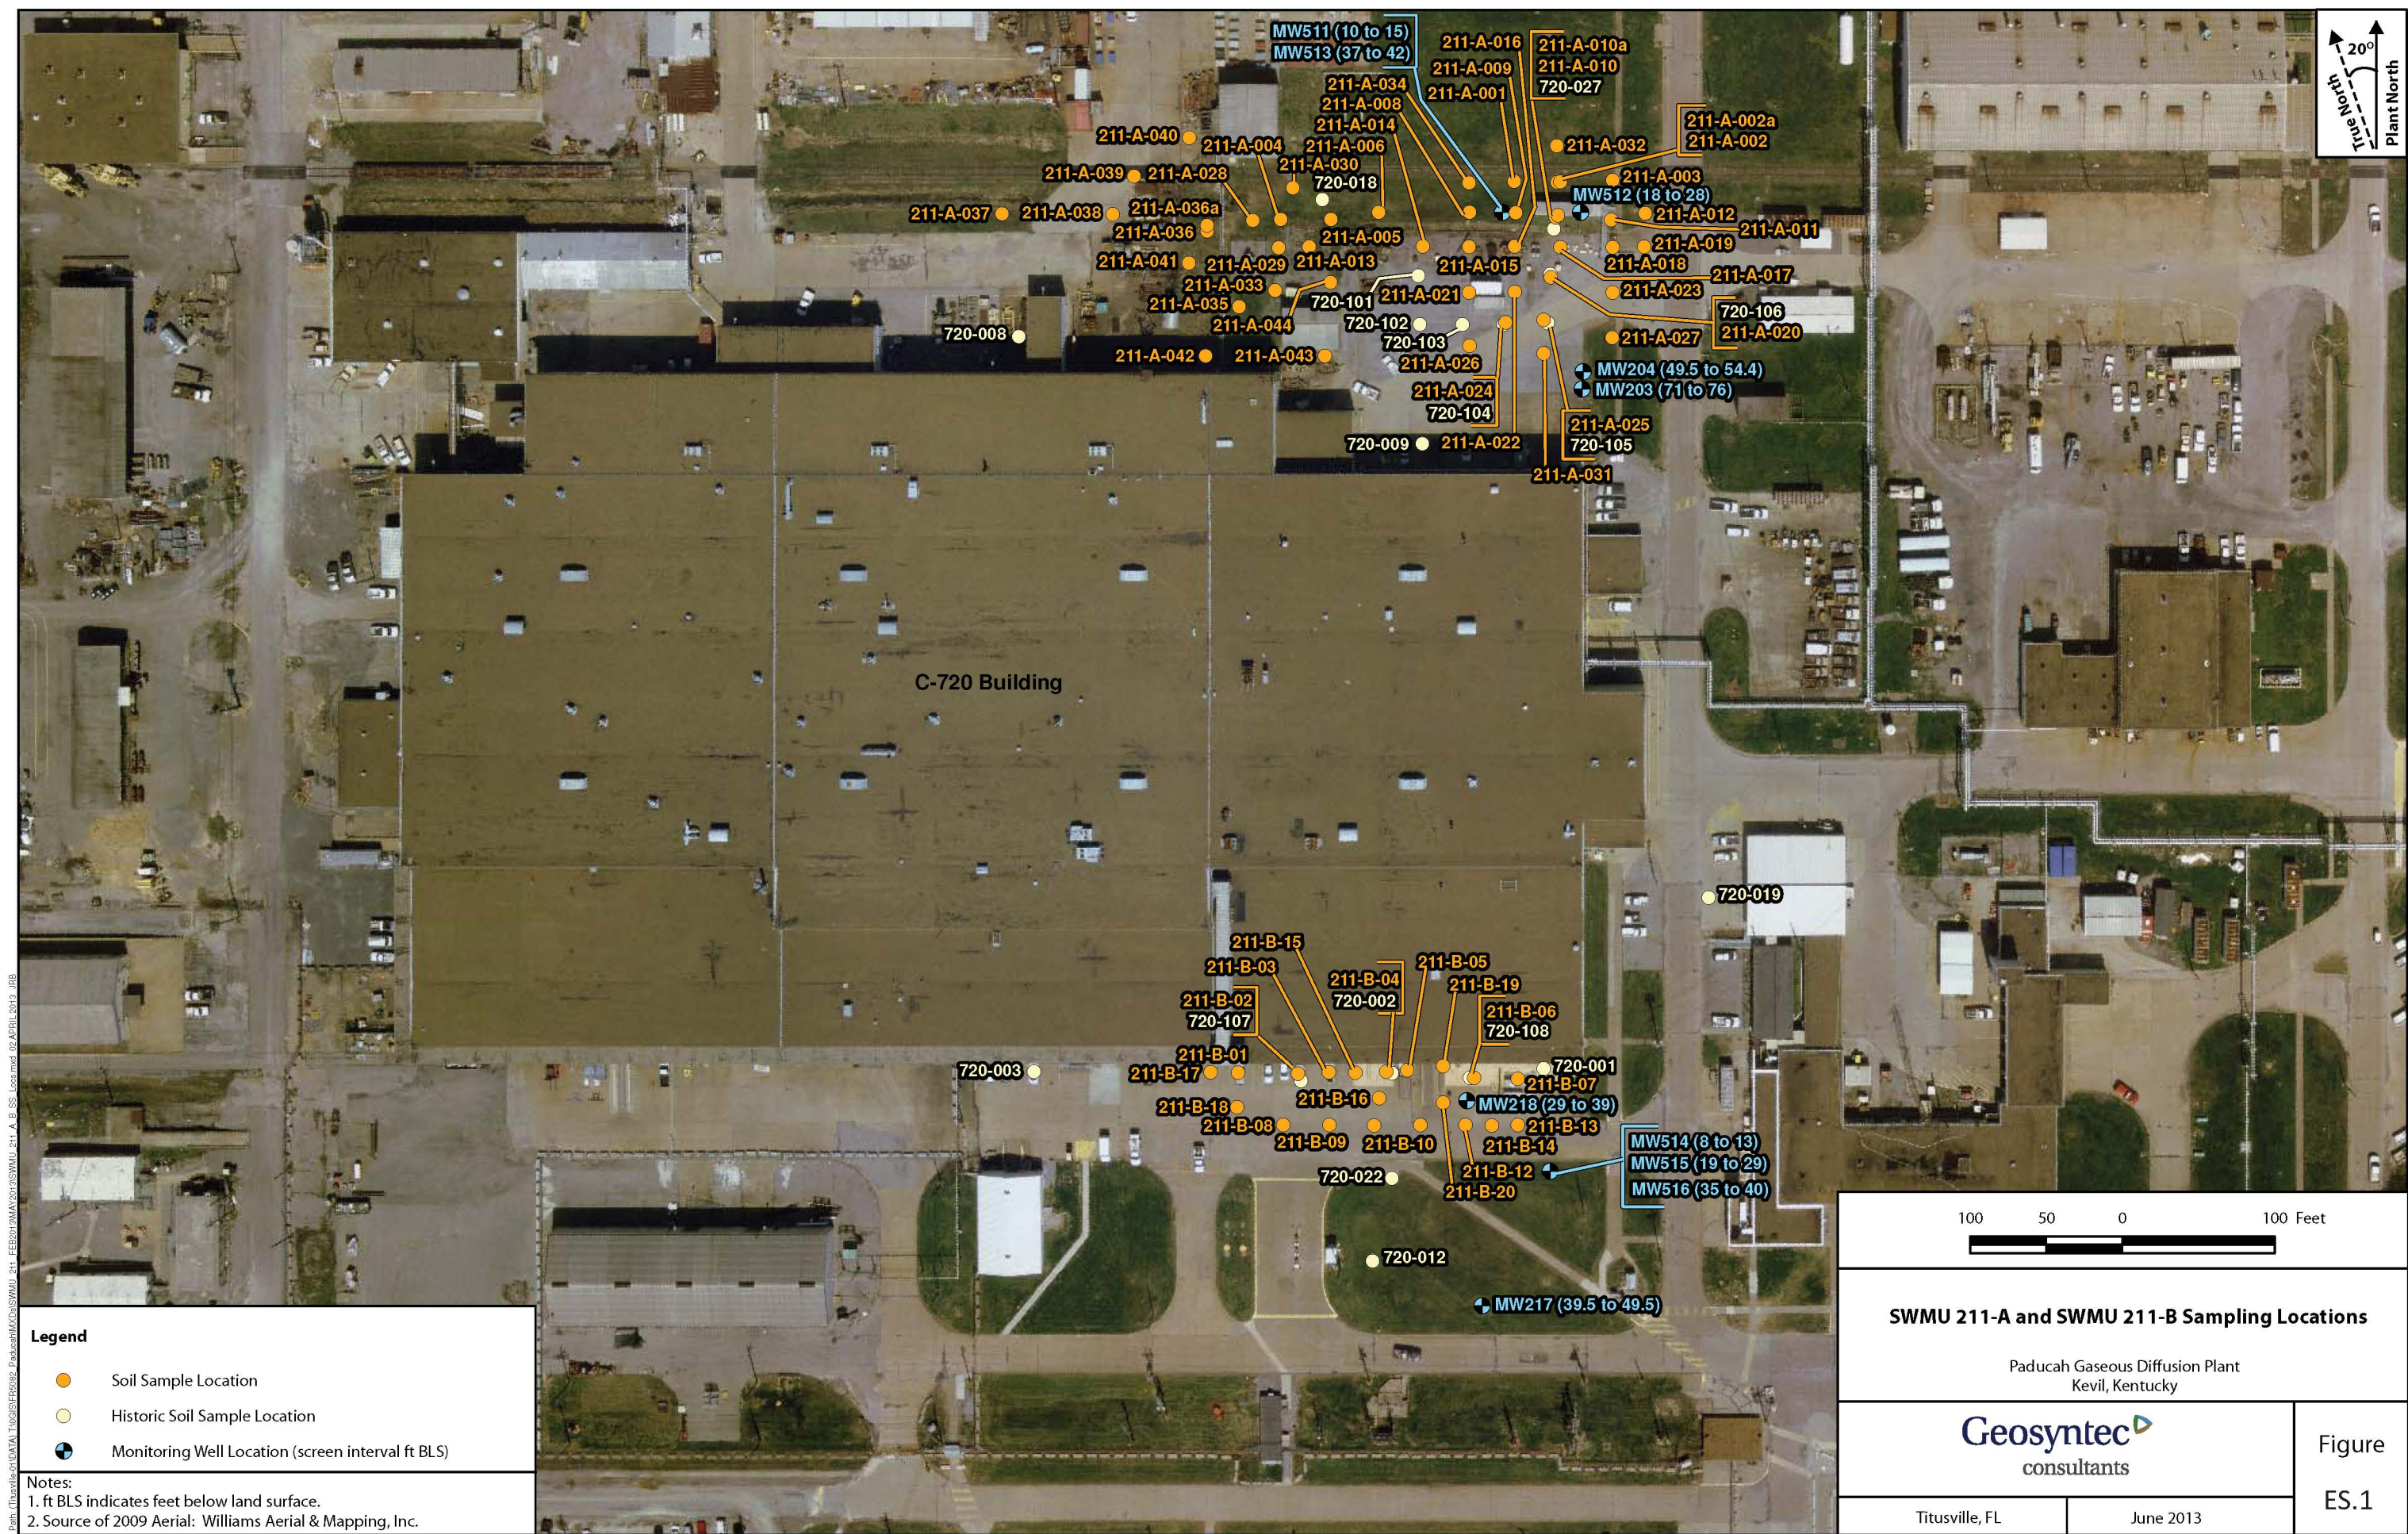


Figure ES.1. SWMU 211-A and SWMU 211-B Sampling Locations

THIS PAGE INTENTIONALLY LEFT BLANK

- 1,1-dichloroethene (1,1-DCE) was the only other VOC to exceed its groundwater protection remediation goal as identified in the RDWP (DOE 2012a). Average 1,1-DCE levels in soil exceeded the remediation goal (137 µg/kg) in 6 of the 42 soil borings (14%).
- The average soil boring 1,1-DCE concentration (based upon the 12 to 13 collected soil samples per soil boring location) among all SWMU 211-A RDSI soil borings was 94 µg/kg. The maximum individual soil sample 1,1-DCE concentration detected was 4,400 µg/kg. 1,1-DCE was primarily detected in the western portion of the 211-A area and may be attributable to a separate historic release of 1,1,1-trichloroethane (1,1,1-TCA) since 1,1-DCE is an abiotic degradation product of 1,1,1-TCA.
- The area of 1,1-DCE levels that exceed 137 µg/kg in part of the soil column is approximately 18,000 ft², a subset of the area of TCE contamination as defined above and wholly contained within the area of TCE contamination.
- The average soil boring *cis*-1,2-DCE, *trans*-1,2-DCE, and vinyl chloride (VC) concentrations did not exceed their respective soil remediation goals.
- The VOC levels in soil define two discrete areas of greater contaminant levels: an east area of TCE contamination, within and south of the previously identified SWMU 211-A boundary, and a west area of both TCE and 1,1-DCE, outside of the previously identified SWMU 211-A boundary.

Groundwater samples were collected from five monitoring wells (MWs) at SWMU 211-A. Groundwater sample results are summarized in Table ES-1. (Preexisting MWs were sampled three times and RDSI-installed wells were sampled once.) To estimate the total TCE mass in soil and the extent of TCE soil impacts at SWMU 211-A, the RDSI soil TCE data and all historical soil TCE data for the SWMU 211-A investigation area in the Oak Ridge Environmental Information System (OREIS) were interpolated using the software Environmental Visualization Systems Expert System (EVS-ES) and a 90% maximum source volume confidence level statistical evaluation.

LATA Environmental Services of Kentucky (LATA Kentucky) completed an RDSI HU hydrologic analysis to aid in the understanding of injection capacity in the event *in situ* bioremediation is selected as the final remedy for SWMU 211-A. Soil conditions at SWMU 211-A appear to be consistent with the requirements associated with an injection-dependent technology. Flexible wall permeameter tests (ASTM D5084-10) and GSD analyses (ASTM D422) were performed at nine locations. The calculated average hydraulic conductivity values ranged from 5.5E-10 cm/s to 3.8E-7 cm/s. RDSI nested-well injection testing also was performed to assess the hydraulic conductivity of the HU1, HU2, and HU3 formations. The injection testing average hydraulic conductivities were 4.4E-5 cm/s, 1.5E-5 cm/s, and 7.9E-6 cm/s for the HU1, HU2, and HU3 formations, respectively.

SWMU 211-B RDSI SUMMARY

Soil samples were collected at 19 boring locations at SWMU 211-B (Figure ES.1). [For reference, the RDWP (DOE 2012a) allotted a total of up to 23 planned and contingency soil borings to characterize TCE levels in soil at SWMU 211-B.] Thirteen soil samples were collected and analyzed at each boring. GSD analysis was performed on select soil samples. Soil sample analytical results that were used to further evaluate the magnitude and extent of VOCs at SWMU 211-B are summarized below.

Table ES.1. RDSI Groundwater Results (September and October 2012) for all MWs at SWMU 211-A

Analyte	Maximum Detected Groundwater Concentration*	Project Action Limit	MCL	Secondary Standard
Total and Dissolved Metals				
Aluminum (mg/L)	1.77 N	1	NA	0.05 to 0.2
Aluminum, dissolved (mg/L)	0.2 U			
Chromium (mg/L)	0.284	1	0.1	NA
Chromium, dissolved (mg/L)	0.01 U			
Iron (mg/L)	4.99	10	NA	0.3
Iron, dissolved (mg/L)	0.404			
Lead (mg/L)	0.00308	1	Zero	NA
Lead, dissolved (mg/L)	0.0013 U			
Manganese (mg/L)	0.282 N	1	NA	0.05
Manganese, dissolved (mg/L)	0.248 X			
Volatile Organic Compounds				
Trichloroethene (µg/L)	220 D	5	5	NA
1,1-Dichloroethene (µg/L)	810 D	7	7	NA
cis-1,2-Dichloroethene (µg/L)	29	70	7	NA
trans-1,2-Dichloroethene (µg/L)	1 to 10 U	100	100	NA
Vinyl chloride (µg/L)	2 to 20 U	2	2	NA
Biological (method Quantitative Polymerase Chain Reaction)				
Dehalococcoides ethenogenes (cells/mL)	43 U	NA	NA	
Dissolved Gases (method Modified R. S. Kerr SOP-175)				
Ethane (µg/L): MDL = 0.10 µg/L	0.41	NA	NA	
Ethene (µg/L): MDL = 0.025 µg/L	0.49	NA	NA	
Methane (µg/L): MDL = 0.025 µg/L	6.8	NA	NA	
Inorganic Anions				
Chloride (mg/L)	120	NA	NA	250
Nitrate (mg/L)	5.4	NA	20	NA
Sulfate (mg/L)	66	NA	NA	250

*Where all analyses are “U” qualified, Table ES.1 reports the laboratory reporting limits. A range is specified where the laboratory reporting limits varied. Laboratory reporting limits for *trans*-1,2-dichloroethene and vinyl chloride reflect a 2X dilution in a sample from MW204 and a 10X dilution in sample from MW513.

Notes:

1. µg/L—microgram per liter
2. mg/L—milligram per liter.
3. D—Compounds identified in an analysis at a secondary dilution filter.
4. N—Sample spike recovery not within control limits.
5. U—(inorganics and organics)—Analyte result is less than reporting limit.
6. X—Other specific flags and footnotes may be required to properly define results. For the dissolved manganese analyses, the serial dilution test difference exceeded the quality control limit of 10%.
7. NA—Not available
8. The higher detection limits reported for *trans*-1,2-dichloroethene and vinyl chloride are due to a 10× dilution in one sample.

- The average soil boring TCE concentration (based upon 13 collected soil samples per soil boring location) was 150 µg/kg, exceeding the soil remediation goal of 75 µg/kg. The maximum soil sample TCE concentration detected was 13,000 µg/kg. The areal extent of TCE contaminated soil, accessible by the selected remedies, is defined to the east, west, and south and encompasses an area of approximately 3,000 ft². Contamination extending under the C-720 footprint (located to the immediate north) is not addressed in this FCR.
- The average TCE concentration exceeded the soil remediation goal of 75 µg/kg at 4 of the 19 boring locations (21%). The average TCE level among all samples in these 4 soil borings was 691 µg/kg.²
- The average soil boring 1,1-DCE, *cis*-1,2-DCE, *trans*-1,2-DCE, and VC concentrations did not exceed their respective soil remediation goals.

Groundwater samples were scheduled to be collected from five MWs at SWMU 211-B. MW514 was dry during the field event; therefore, groundwater samples were collected and analyzed from the four remaining MWs. Groundwater sample results are summarized in Table ES.2. [Preexisting MWs were sampled three times and RDSI-installed wells, except for MW514 (which was dry), were sampled once.]

EVS-ES was used to interpolate the RDSI soil TCE concentration data along with historical soil TCE data for the SWMU 211-B investigation area from OREIS and estimate the total TCE mass in soil and the extent of TCE soil impacts at SWMU 211-B, with consideration of a 90% maximum source volume confidence level statistical evaluation. The total estimated TCE volume is 0.8 gal [based upon current areal extent and that the FCR is focusing on contaminated soil accessible by the selected remedies (i.e., no mass interpolated beneath building)]. LATA Kentucky performed an RDSI HU hydrologic analysis to aid the design of remedial injection technologies to be applied at SWMU 211-B. Soil conditions at SWMU 211-B are consistent with the requirements associated with an injection dependent technology. Flexible wall permeameter tests (ASTM D5084-10) and GSD analyses (ASTM D422) were performed at nine locations. The calculated average hydraulic conductivity values ranged from 1.6E-9 cm/s to 3.3E-6 cm/s. RDSI nested-well injection testing also was performed to assess the hydraulic conductivity of HU1, HU2, and HU3 formations. The injection testing average hydraulic conductivities were 6.7E-5 cm/s, 2.0E-5 cm/s, and 2.4E-5 cm/s for HU1, HU2, and HU3 formations, respectively.

DATA GAPS

The lone Decision Rule from the data quality objectives for the RDSI is as follows:

If soil boring averaged concentration of TCE and TCE degradation products in soil of the UCRS exceed cleanup levels for a given soil boring, then include the location in the treatment area. If the soil boring-averaged soil concentrations do not exceed cleanup levels, then the area need not be included in the treatment area.

The RDSI fulfilled this requirement to the extent possible.

² The average TCE level among all samples excludes the lower analysis for depth intervals where duplicate analyses are available and uses one-half of the laboratory reporting limit for “U” qualified analyses.

Table ES.2. RDSI Groundwater Results (September and October 2012) for all MWs at SWMU 211-B

Analyte	Maximum Detected Groundwater Concentration*	Project Action Limit	MCL	Secondary Standard
Total and Dissolved Metals				
Aluminum (mg/L)	8.49 N	1	NA	0.05 to 0.2
Aluminum, dissolved (mg/L)	0.281			
Chromium (mg/L)	0.131	1	0.1	NA
Chromium, dissolved (mg/L)	0.01 U			
Iron (mg/L)	9.79	10	NA	0.3
Iron, dissolved (mg/L)	0.139			
Lead (mg/L)	0.0106	1	Zero	NA
Lead, dissolved (mg/L)	0.0013 U			
Manganese (mg/L)	1.43	1	NA	0.05
Manganese, dissolved (mg/L)	0.746 X			
Volatile Organic Compounds				
Trichloroethene (µg/L)	120	5	5	NA
1,1-Dichloroethene (µg/L)	10 U	7	7	NA
cis-1,2-Dichloroethene (µg/L)	2.2	70	7	NA
trans-1,2-Dichloroethene (µg/L)	2 U	100	100	NA
Vinyl chloride (µg/L)	4 U	2	2	NA
Biological (method Quantitative Polymerase Chain Reaction)				
Dehalococcoides ethenogenes (cells/mL)	35 U	NA	NA	
Dissolved Gases (method Modified R. S. Kerr SOP-175)				
Ethane (µg/L): MDL = 0.10 µg/L	25	NA	NA	
Ethene (µg/L): MDL = 0.025 µg/L	7.9	NA	NA	
Methane (µg/L): MDL = 0.025 µg/L	35	NA	NA	
Inorganic Anions				
Chloride (mg/L)	340	NA	NA	250
Nitrate (mg/L)	3	NA	20	NA
Sulfate (mg/L)	40	NA	NA	250

*Where all analyses are "U" qualified. Table ES.2 reports the laboratory reporting limits.

Notes:

1. µg/L—microgram per liter
2. mg/L—milligram per liter.
3. N—Sample spike recovery not within control limits.
4. U—(inorganics and organics) -Analyte result is less than reporting limit.
5. X—Other specific flags and footnotes may be required to properly define results. For the dissolved manganese analyses, the serial dilution test difference exceeded the quality control limit of 10%.
6. NA—Not available

- The 42 soil borings of SWMU 211-A that were sampled for VOC analyses as part of the RDSI and data from historical soil borings in the area as contained in OREIS delimit the lateral extent of soil contamination of TCE and its degradation products, as defined by the project remediation goals, in all directions.
- At SWMU 211-B, the 20 soil borings that were sampled for VOC analyses as part of the RDSI and data from historical soil borings in the area as contained in OREIS delimit the east, west, and south extent of soil contamination by TCE and its degradation products, as defined by the project remediation goals. The area of soil contamination abuts the C-720 Building. As recognized in the RDWP (DOE 2012a), plant infrastructure and continuing use of the C-720 Building prevent current sampling of the soils beneath the building such that the north extent of the soil contamination cannot be determined at this time.

The available soil data for SWMUs 211-A and 211-B provide a foundation for selection and design of an appropriate remedial alternative.

DISCUSSION

This FCR (based on data from the current RDSI as well as the soil sample data from 2004 and other historical data for the investigation areas as available in OREIS) used EVS-ES to contour the 90% confidence limit of 75 µg/kg TCE in soil. The EVS-ES software estimates the TCE source mass within the 90% confidence limit of 75 µg/kg TCE to be approximately 12 kg (2.2 gal) at 211-A and 5 kg (0.8 gal) at 211-B.

The soil and groundwater data collected at SWMU 211-A and SWMU 211-B indicate that natural biodegradation may be occurring, albeit at a relatively slow rate. The presence of methane, ethene, ethane, and *cis*-1,2-DCE, and the absence of VC or measureable *Dehalococcoides mccartyi* are indicative of an environment that appears to have some natural attenuation capacity.

THIS PAGE INTENTIONALLY LEFT BLANK

1. PROJECT DESCRIPTION

The U.S. Department of Energy (DOE) has tasked LATA Environmental Services of Kentucky, LLC, (LATA Kentucky) with performing field activities to (1) better determine the lateral and vertical extent and distribution of volatile organic compounds (VOCs) and source material and (2) determine soil and groundwater parameters, including geochemical parameters to be utilized in the design of *in situ* bioremediation, if this alternative is selected for the Upper Continental Deposits (UCD) at Solid Waste Management Units (SWMUs) 211-A and 211-B at the Paducah Gaseous Diffusion Plant (PGDP), located near Paducah, Kentucky (Figure 1). LATA Kentucky has developed this Final Characterization Report (FCR) to document these field activities that are associated with the Remedial Design Support Investigation (RDSI) (DOE 2012a) for the Southwest Plume (Figure 2).

The Southwest Plume refers to an area of groundwater contamination in the Regional Gravel Aquifer (RGA) south of the Northwest Groundwater Plume and west of the C-400 Building. The primary groundwater contaminant of concern for the Southwest Plume is trichloroethene (TCE). Other potential contaminants found in the plume include additional VOCs, metals, and the radionuclide technetium-99.

DOE conducted a site investigation (SI) in 2004 to address uncertainties regarding potential source areas to the Southwest Plume that remained after previous investigations. The SI further profiled the concentration and distribution of VOCs in the dissolved-phase plume along the west plant boundary as documented in the SI report (DOE 2007). The potential presence of dense nonaqueous-phase liquid (DNAPL) TCE at the Southwest Plume source areas has been noted based on contaminant trends observed in soil and groundwater samples.

The potential source areas investigated in the SI (DOE 2007) included the C-747-C Oil Landfarm (Oil Landfarm–SWMU 1); the C-720 Building Area near the northeast and southeast corners of the building (C-720 Northeast Site–SWMU 211-A and C-720 Southeast Site–SWMU 211-B); and the storm sewer system between the south side of the C-400 Building and Outfall 008 (storm sewer–SWMU 102). As a result of the SI, the storm sewer was excluded as a potential VOC source to the Southwest Plume.

A revised focused feasibility study (FFS) (DOE 2011) was prepared to evaluate remedial alternatives for potential application at the Southwest Plume source areas. The revised FFS defined the following remedial action objectives:

1. Treat and/or remove the principal threat waste consistent with the National Contingency Plan.
- 2a. Prevent exposure to VOC contamination in the source areas that will cause an unacceptable risk to excavation workers (< 10 ft).
- 2b. Prevent exposure to non-VOC contamination and residual VOC contamination through interim land use controls (LUCs) within the Southwest Plume source areas (i.e., SWMU 1, SWMU 211-A, and SWMU 211-B) pending remedy selection as part of the Soils Operable Unit (OU) and the Groundwater OU.
3. Reduce VOC migration from contaminated subsurface soils in the treatment areas at the Oil Landfarm and C-720 Northeast and Southeast Sites so that contaminants migrating from the treatment areas do not result in the exceedance of maximum contaminant levels (MCLs) in underlying RGA groundwater.

THIS PAGE INTENTIONALLY LEFT BLANK

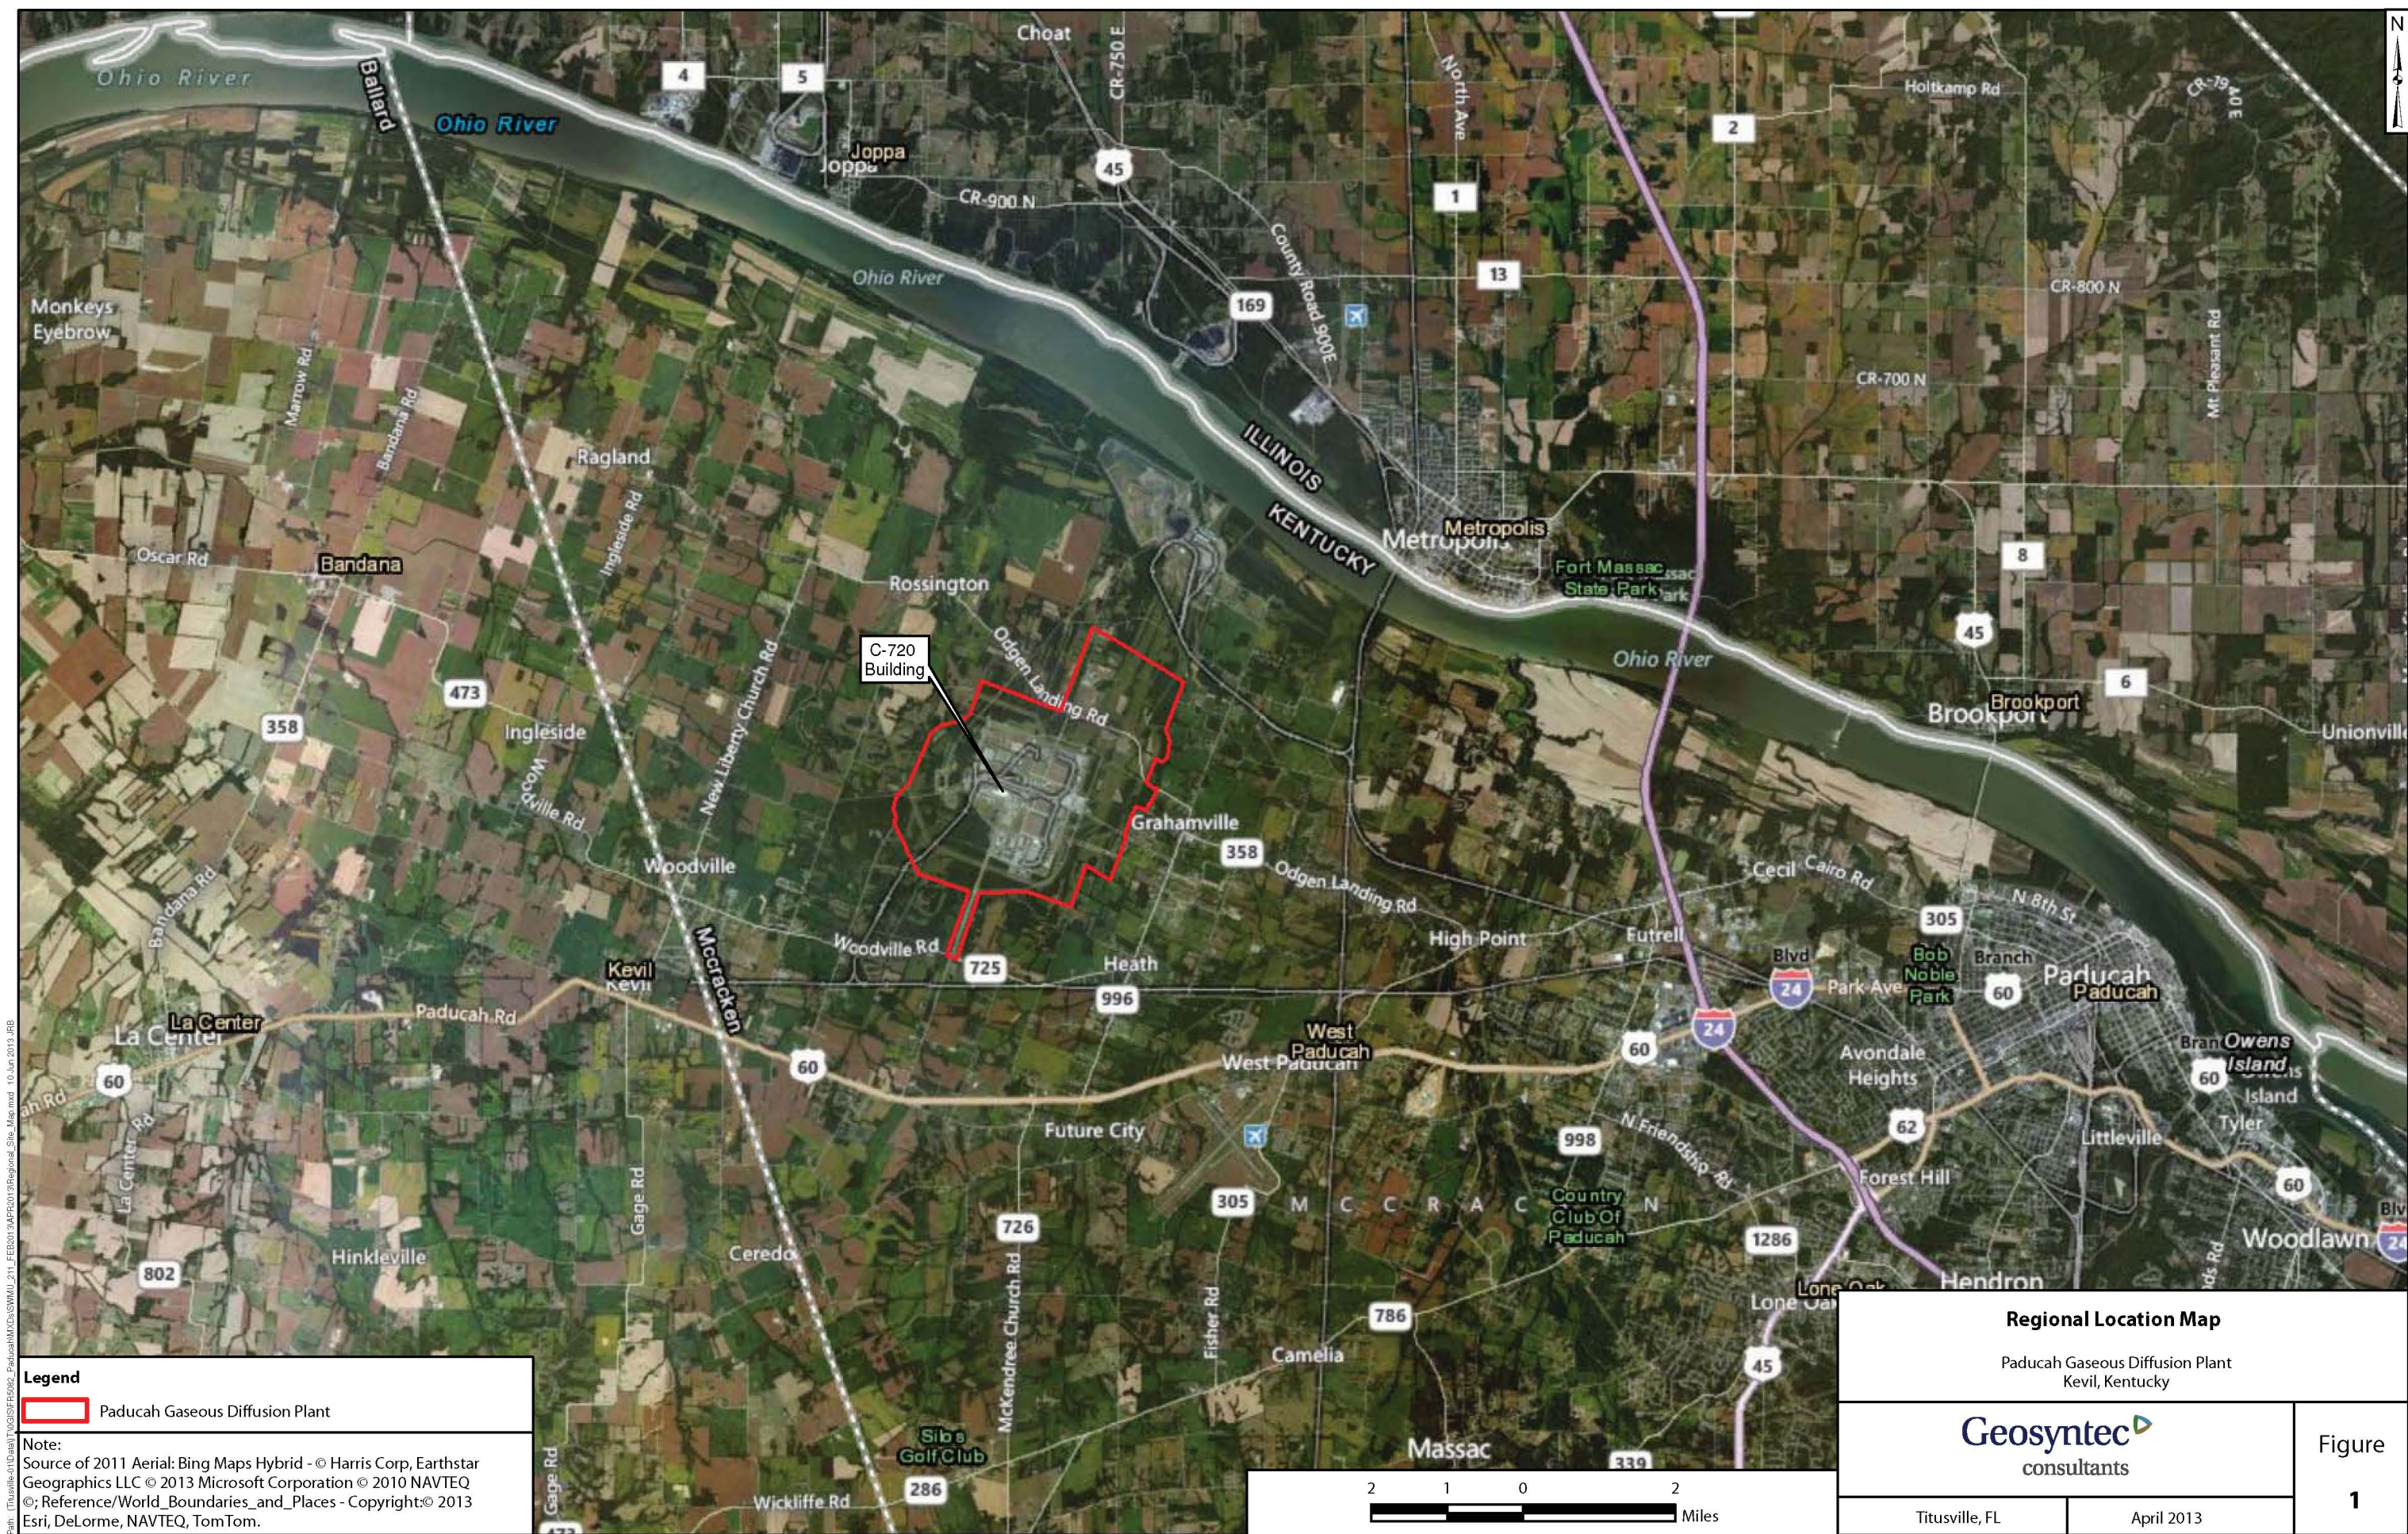


Figure 1. Regional Location Map



Path: (U:\aerials-01\Data\VT\GIS\H5\5082_Paducah\MXDs\SWMU_211_A_B.mxd 09 May 2013 JRB

Figure 2. SWMUs 211-A and 211-B Location Map

The following remediation goals for the Upper Continental Recharge System (UCRS) soils at SWMUs 211-A and 211-B are presented in the record of decision (ROD) (DOE 2012b):

- TCE: 75 µg/kg,
- 1,1-dichloroethene (DCE): 137 µg/kg,
- *cis*-1,2-DCE: 619 µg/kg,
- *trans*-1,2-DCE: 5,290 µg/kg, and
- vinyl chloride (VC): 570 µg/kg.

The selected remedies for SWMUs 211-A and 211-B are identified in the ROD (DOE 2012b), which are *in-situ* source treatment using enhanced *in situ* bioremediation with interim LUCs (Alternative 8) or long-term monitoring with interim LUCs (Alternative 2).

This FCR for SWMU 211-A and 211-B is intended to resolve data needs in support of the treatment system design. Based on the information presented in this report a recommendation for final remedy selection for SWMUs 211-A and 211-B will be presented to the Federal Facility Agreement parties by a letter notification.

THIS PAGE INTENTIONALLY LEFT BLANK

2. SITE BACKGROUND

2.1 SITE DESCRIPTION

PGDP is located approximately 10 miles west of Paducah, Kentucky, (population approximately 26,000) and 3.5 miles south of the Ohio River in the western part of McCracken County (Figure 1). The plant is located on a DOE-owned site, approximately 650 acres of which are within a fenced security area, approximately 800 acres are located outside the security fence, and the remaining 1,986 acres are licensed to Kentucky as part of the West Kentucky Wildlife Management Area. Bordering the PGDP reservation to the northeast, between the plant and the Ohio River, is a Tennessee Valley Authority reservation on which the Shawnee Fossil Plant is located. All plant and process water at PGDP is drawn from the Ohio River.

Before the PGDP was built, a munitions-production facility, the Kentucky Ordnance Works (KOW), was operated at the current PGDP location and at an adjoining area southwest of the site. Munitions, including trinitrotoluene, were manufactured and stored at the KOW between 1942 and 1945. Construction of PGDP was initiated in 1951 and the plant began operations in 1952. Construction was completed in 1955 and PGDP became fully operational in that year, supplying enriched uranium for commercial reactors and military defense reactors.

2.2 REGIONAL GEOLOGY AND HYDROGEOLOGY

Regional Geology. PGDP is located in the Jackson Purchase Region of Western Kentucky, which represents the northern tip of the Mississippi Embayment portion of the Coastal Plain. The Jackson Purchase Region is an area of land that includes all of Kentucky west of the Tennessee River. The stratigraphic sequence in the region consists of Cretaceous, Tertiary, and Quaternary sediments unconformably overlying Paleozoic bedrock. Within the Jackson Purchase Region, strata deposited above the Precambrian basement rock attain a maximum thickness of 12,000 ft to 15,000 ft. Exposed strata in the region range in age from Devonian to Holocene. The Devonian stratum crops out along the western shore of Kentucky Lake.

Mississippian carbonates form the nearest outcrop of bedrock and are exposed approximately 9 miles northwest of PGDP in southern Illinois (MMES 1992). The Coastal Plain deposits unconformably overlie Mississippian carbonate bedrock and consist of the following: the Tuscaloosa Formation; the sand and clays of the Clayton/McNairy Formations; the Porters Creek Clay; and the Eocene sand and clay deposits (undivided Jackson, Claiborne, and Wilcox Formations). Continental Deposits unconformably overlie the Coastal Plain deposits, which are, in turn, covered by loess and/or alluvium.

Relative to the shallow groundwater flow system in the vicinity of PGDP, the Continental Deposits and the overlying loess and alluvium are of key importance. The Continental Deposits resemble a large low-gradient alluvial fan that covered much of the region and eventually buried the erosional topography. A principal geologic feature in the PGDP area is the Porters Creek Clay Terrace, a subsurface terrace that trends approximately east to west across the southern portion of the plant. The Porters Creek Clay Terrace represents the southern limit of erosion or scouring of the ancestral Tennessee River. Thicker sequences of Continental Deposits, as found underlying PGDP, represent valley fill deposits and can be informally divided into a lower unit (gravel facies) and an upper unit (clay facies). The Lower Continental Deposits (LCD) are the gravel facies consisting of chert gravel in a matrix of poorly sorted sand and silt that rests on an erosional surface representing the beginning of the valley fill sequence. In total, the gravel units average approximately 30-ft thick, but some thicker deposits (as much as 50 ft) exist in deeper scour

channels. The UCD is primarily a sequence of fine grained, clastic facies varying in thickness from 15 ft to 60 ft that consist of clayey silts with lenses of sand and occasional gravel. The UCRS is comprised of alluvial deposits, which vary considerably in grain size and porosity. Based on geologic logs, the lithology reflects facies changes that range from silt to sand to clay. Some logs indicate clay is present from land surface to the top of the RGA, which confines the aquifer. Other logs indicate there are areas where only silt and sand are present from land surface to the top of the RGA, so the RGA is unconfined in these areas. The RGA receives recharge most readily in the unconfined areas. These areas may serve as pathways for contaminant migration from the UCRS to the RGA.

The area of the Southwest Plume lies within the buried valley of the ancestral Tennessee River in which Pleistocene Continental Deposits (the fill deposits of the ancestral Tennessee River Basin) rest unconformably on Cretaceous marine sediments. Pliocene through Paleocene formations in the area of the Southwest Plume have been removed by erosion from the ancestral Tennessee River Basin. In the area of the Southwest Plume and its sources, the upper McNairy Formation consists of 60 to 70 ft of interbedded units of silt and fine sand and underlies the Continental Deposits. Total thickness of the McNairy Formation is approximately 225 ft.

The surface deposits found in the vicinity of PGDP consist of loess and alluvium. Both units are composed of clayey silt or silty clay and range in color from yellowish-brown to brownish-gray or tan, making field differentiation difficult.

Regional Hydrogeology. The local groundwater flow system at the PGDP site occurs within the sands of the Cretaceous McNairy Formation, Pliocene terrace gravels, Plio-Pleistocene lower continental gravel deposits and upper continental deposits, and Holocene alluvium (Jacobs EM Team 1997; MMES 1992). Four specific components have been identified for the groundwater flow system and are defined as follows from lowest to uppermost.

- McNairy Flow System. Formerly called the deep groundwater system, this component consists of interbedded sand, silt, and clay of the Cretaceous McNairy Formation. Sand facies account for 40% to 50% of the total formation's thickness of approximately 225 ft. Groundwater flow is predominantly north.
- Terrace Gravel. This component consists of gravel deposits and later reworked sand and gravel deposits found at elevations higher than 320 ft above mean sea level (amsl) in the southern portion of the plant site; they overlie the Paleocene Porters Creek Clay and Eocene sands and are thought to be Pliocene in age. These deposits usually lack sufficient thickness and saturation to constitute an aquifer. Terrace Gravel is not present in the area of the Southwest Plume sources.
- RGA. This component consists of the Quaternary sand and gravel facies of the LCD and Holocene alluvium found adjacent to the Ohio River and is of sufficient thickness and saturation to constitute an aquifer. These deposits are commonly thicker than the Pliocene(?) gravel deposits, having an average thickness of 30 ft, and range up to 50 ft in thickness along an axis that trends east-west through the plant site. Prior to 1994, the RGA was the primary aquifer used as a drinking water source by nearby residents. The RGA has not been formally classified, but likely would be considered a Class II groundwater under U.S. Environmental Protection Agency (EPA) Groundwater Classification guidance (EPA 1986). Groundwater flow is predominantly north toward the Ohio River.
- UCRS. Formerly called the shallow groundwater system, the UCRS consists of the surficial alluvium and UCD. Sand and gravel lithofacies appear relatively discontinuous in cross-section, but portions may be interconnected. The most prevalent sand and gravel deposits occur at an elevation of approximately 345 to 351 ft amsl; less prevalent deposits occur at elevations of 337 to 341 ft amsl.

Groundwater flow is predominantly downward into the RGA from the UCRS, which has a limited horizontal component in the vicinity of PGDP.

The groundwater flow systems associated with the Southwest Plume and its sources are the UCRS and the RGA. In the area of the Southwest Plume, groundwater flow and contaminant migration through the upper 45 ft to 55 ft of subsurface soil (UCD) is predominantly downward with little lateral spreading. This flow system is termed the UCRS. Locally, the UCRS consists of three hydrogeologic units (HUs), an upper silt interval (HU1), an intermediate horizon of sand and gravel lenses (HU2), and a lower silt and clayey silt interval (HU3). Groundwater flow rates in the UCRS tend to be on the order of 0.1 ft per day (ft/day). The silts and clays of the UCRS readily adsorb some contaminants, such as many metals and radionuclides, retarding the migration of these contaminants in groundwater from the source areas. Moreover, laterally extensive silt and clay horizons in the UCRS may halt the downward migration of DNAPLs, but foster the development of DNAPL pools in the subsurface.

Groundwater occurrence in the UCRS is primarily the result of infiltration from natural and anthropogenic recharge. Flow is predominantly downward. Groundwater in the UCRS provides recharge to the underlying RGA. The water table in the UCRS varies both spatially and seasonally due to lithologic heterogeneity and recharge factors (e.g., infiltration of focused run-off from engineered surfaces, seepage due to variations in cooling water line integrity, rainfall and evapotranspiration), and averages approximately 17 ft in depth with a range of 2 to 50 ft.

Downward vertical hydraulic gradients generally range from 0.5 to 1 ft per ft where measured by monitoring wells (MWs) completed at different depths in the UCRS. MWs in the south-central area of PGDP (south of the C-400 Building and east of the C-720 Building) have lower water level elevations than MWs in other areas of the plant (DOE 1997). Horizontal hydraulic conductivity of the UCRS sand units has been determined from numerous slug tests in a previous investigation (CH2M HILL 1992). The measured hydraulic conductivity of the UCRS sands was $3.5\text{E-}05$ centimeters per second (cm/s) at SWMU 1 and $3.4\text{E-}05$ cm/s at the C-720 Building ($1.4\text{E-}05$ and $1.3\text{E-}05$ inches/second). Measurements of the vertical hydraulic conductivity of the UCRS silt and clay units are not available for either SWMU 1 or the C-720 Building; measurements of the vertical hydraulic conductivity of UCRS silt and clay units on-site range between $1.7\text{E-}08$ and $2.1\text{E-}05$ cm/s ($6.7\text{E-}09$ and $8.2\text{E-}06$ in/s) (DOE 1997; DOE 1999). (The depth-averaged vertical hydraulic conductivity of the total UCRS interval is approximately $1\text{E-}06$ cm/s [$3.9\text{E-}07$ in/s].)

A thick interval of late Pleistocene sand and gravel from a depth interval of 60 to 90 ft (LCD) represents the shallow, uppermost aquifer underlying most of PGDP, referred to as the RGA. The RGA consists of a discontinuous upper horizon of fine to medium sand (HU4) and a lower horizon of medium to coarse sand, and gravel (HU5). The RGA is the main pathway for lateral flow and dissolved contaminant migration off-site. Variations in hydraulic conductivity and the location of discrete sources of recharge govern the local direction and rate of groundwater flow; however, overall flow within the RGA trends north-northeast toward the Ohio River, which represents the regional hydraulic base level.

The RGA typically has a high hydraulic conductivity with a range from $1.9\text{E-}02$ to $2.0\text{E+}00$ cm/s ($7.5\text{E-}03$ to $7.9\text{E-}01$ in/s) as determined from aquifer testing. RGA horizontal hydraulic gradients range between $1.84\text{E-}04$ and $2.98\text{E-}03$ ft/ft and have average and median values of $7.81\text{E-}04$ and $4.4\text{E-}04$ ft/ft, respectively. Groundwater flow rates within the RGA average approximately 1 to 3 ft/day. Contaminant migration tends to be less retarded in the coarse sediments of the RGA due to its high groundwater flow rate and also due to the low fraction of organic carbon (0.02%).

2.3 STUDY AREA GEOLOGY AND HYDROGEOLOGY

Study Area Geology. The geologic strata found in the C-720 Building Area range from clays to silts to sands. Silt and clay are the predominant subsurface soil texture to a depth of 15 to 20 ft. Interbedded sand and clay units are commonly found below those depths. Clay and sandy clay/clayey sand are present near the bottom of most of the soil borings northeast of C-720 Building (DOE 2007).

Immediately southeast of the C-720 Building silt and clay are present to a depth of 15 ft with interbedded sand and clay layers found at deeper horizons. Medium-to-coarse-grained sand, suggestive of the contact between the UCD and LCD, was encountered near the bottom of borings in the southeast corner.

Study Area Hydrogeology. The Southwest Plume SI included soil sampling within the upper 60 ft of SWMU 211-A and 211-B. Soil samples verified the presence of the HU1, HU2, and HU3 members of the UCRS. The UCRS is comprised of alluvial deposits, which vary considerably in grain size and porosity. Based on geologic logs, the lithology reflects facies changes that range from silt to sand to clay. Some logs indicate clay is present from land surface to the top of the RGA, which confines the aquifer. Other logs indicate there are areas where only silt and sand are present from land surface to the top of the RGA, so the RGA is unconfined in these areas. The RGA receives recharge most readily in the unconfined areas. These areas may serve as pathways for contaminant migration from the UCRS to the RGA. HU3 sediments tended to be coarser grained than typical. The RGA was not encountered, although the final interval sampled 55 to 60 ft often revealed a noticeable increase in grain size and a significant increase in moisture content, consistent with trends near the top of the RGA.

2.4 CONTAMINANT HISTORY

The Southwest Plume refers to an area of groundwater contamination at PGDP in the RGA that is south of the Northwest Groundwater Plume and west of the C-400 Building. The Southwest Plume was identified during the Waste Area Grouping (WAG) 27 Remedial Investigation (RI) (DOE 1999). Additional work to characterize the plume (SWMU 210) was performed as part of the WAG 3 RI (DOE 2000a) and Data Gaps Investigations (DOE 2000b). The Southwest Plume SI (DOE 2007) evaluated potential source areas of contamination to the Southwest Plume and profiled the level and distribution of VOCs in the plume along the west plant fence line.

The C-720 Building is located in the southwest area of the PGDP, southwest of the C-400 Building (Figure 2). The C-720 Building consists of several repair and machine shops, as well as other support operations. The WAG 27 RI identified areas of TCE contamination at the C-720 Building Area. One area was underneath the parking lot and equipment storage area at the northeast corner of the building. The second area was located underneath the parking lot adjacent to the loading docks at the southeast corner of the building.

C-720 Northeast Site (SWMU 211-A) Source. Contamination found to the northeast of the C-720 Building is believed to have been released during routine equipment cleaning and rinsing performed in the area. Solvents were used to clean parts, and the excess solvent may have been discharged on the ground; additionally, spills and leaks from the cleaning process may have contaminated surface soils in the area. Solvents may have migrated as dissolved contamination, as rainfall percolating through the soils and migrating to deeper soils and the shallow groundwater, or as DNAPL migrating to adjacent and underlying soils.

C-720 Southeast Site (SWMU 211-B) Source. The source of VOC contamination found southeast of the C-720 Building is not certain. The VOCs found in this area may have originated from spills that occurred

within the building, with subsequent discharge to storm drains leading to the southeast corner of the building or from spills or leaks on the loading dock or parking lot located to the southeast of the building. The area of concern discovered during the WAG 27 RI is near the outlet to one of the storm drains for the east end of the building. A storm sewer inlet for the southeast parking lot also is located in the vicinity. The north edge of the parking lot, where the contamination occurs, is the location of one of the loading docks for the C-720 Building, an area where chemicals, including solvents, may have been loaded or unloaded.


2.5 CONCEPTUAL SITE MODELS

The C-720 Building is a maintenance and machine shop facility that has supported PGDP activities since 1952. It is located in the southwest portion of the plant. The area around the east end of the C-720 Building is covered mostly by concrete or asphalt with intermittent small areas of exposed soil. Both the Northeast and Southeast sites contain multiple utilities that influence the types of subsurface intrusive activities that are feasible in those areas.

For the source zones comprised of high concentration TCE soils and other VOCs at the C-720 sites, the primary pathway of contaminant migration is dissolution of contaminant residual, comprised of TCE and other VOCs, into groundwater in the UCRS and downward migration into the RGA. No lateral migration in the UCRS outside the SWMU area has been identified or is expected since vertical flow is the predominant direction of migration for the TCE contaminant. Dissolved contaminants from these sources subsequently migrate toward the west-northwest in the RGA. The much lower hydraulic conductivity of the McNairy Formation underlying the RGA limits vertical migration of dissolved contamination below approximately 100 ft. Groundwater samples from the RGA in the Southwest Plume support the conclusion that the Southwest Plume has not migrated beyond the DOE property line, which is approximately 4,789 ft northwest of the C-720 Building area. From the point where the groundwater flow path that includes the Southwest Plume crosses the DOE property line, the modeled particle flow path distance to potential points of exposure to RGA groundwater near the Ohio River is approximately 4.0 miles. Currently, there is no uncontrolled exposure to groundwater at PGDP. At this time, exposure to contaminated groundwater off DOE property is hypothetical because the DOE Water Policy controls its use. Figure 3 illustrates the conceptual site model (CSM) for the C-720 Building TCE source area.

C-720 Northeast Site (SWMU 211-A) CSM. The suspected source of contamination for the Northeast site is from a spill(s) of TCE that occurred during routine equipment cleaning and rinsing performed in the area. The suspected spill location(s) is to the north of the adjacent concrete and asphalt parking and maintenance area west of Eighth Street. The maximum TCE concentration detected in soil (8,100 µg/kg) in the WAG 27 RI was in a sample 30 ft below ground surface (bgs)/344.39 ft amsl in boring 720-027 (sample ID 720027SA030), located immediately north of the parking lot. The WAG 27 RI and subsequent Southwest Plume SI results show soil TCE levels are variable throughout the UCRS. The source of 1,1-DCE, found co-mingled with TCE in the soils of the west end of the area of SWMU 211-A contamination, is unknown.

C-720 Southeast Site (SWMU 211-B) CSM. The suspected source of contamination for the Southeast site is located below and adjacent to the outlet for the storm drain on the east end, south side of the C-720 Building, and/or a nearby storm sewer inlet for the parking lot. The southeast corner of the building has a parking lot and a material loading and unloading dock adjacent to it. The highest concentration of TCE in soil samples (68,000 µg/kg) in the WAG 27 RI and subsequent Southwest Plume SI were found at 20 ft bgs (351.80 ft amsl) in soil boring 720-002 (sample ID 7200002SA020), beneath the concrete and asphalt-covered southeast parking lot and adjacent to the intersection of a buried storm water drain issuing from the facility and a main storm-water sewer line on the south side of the C-720 Building.

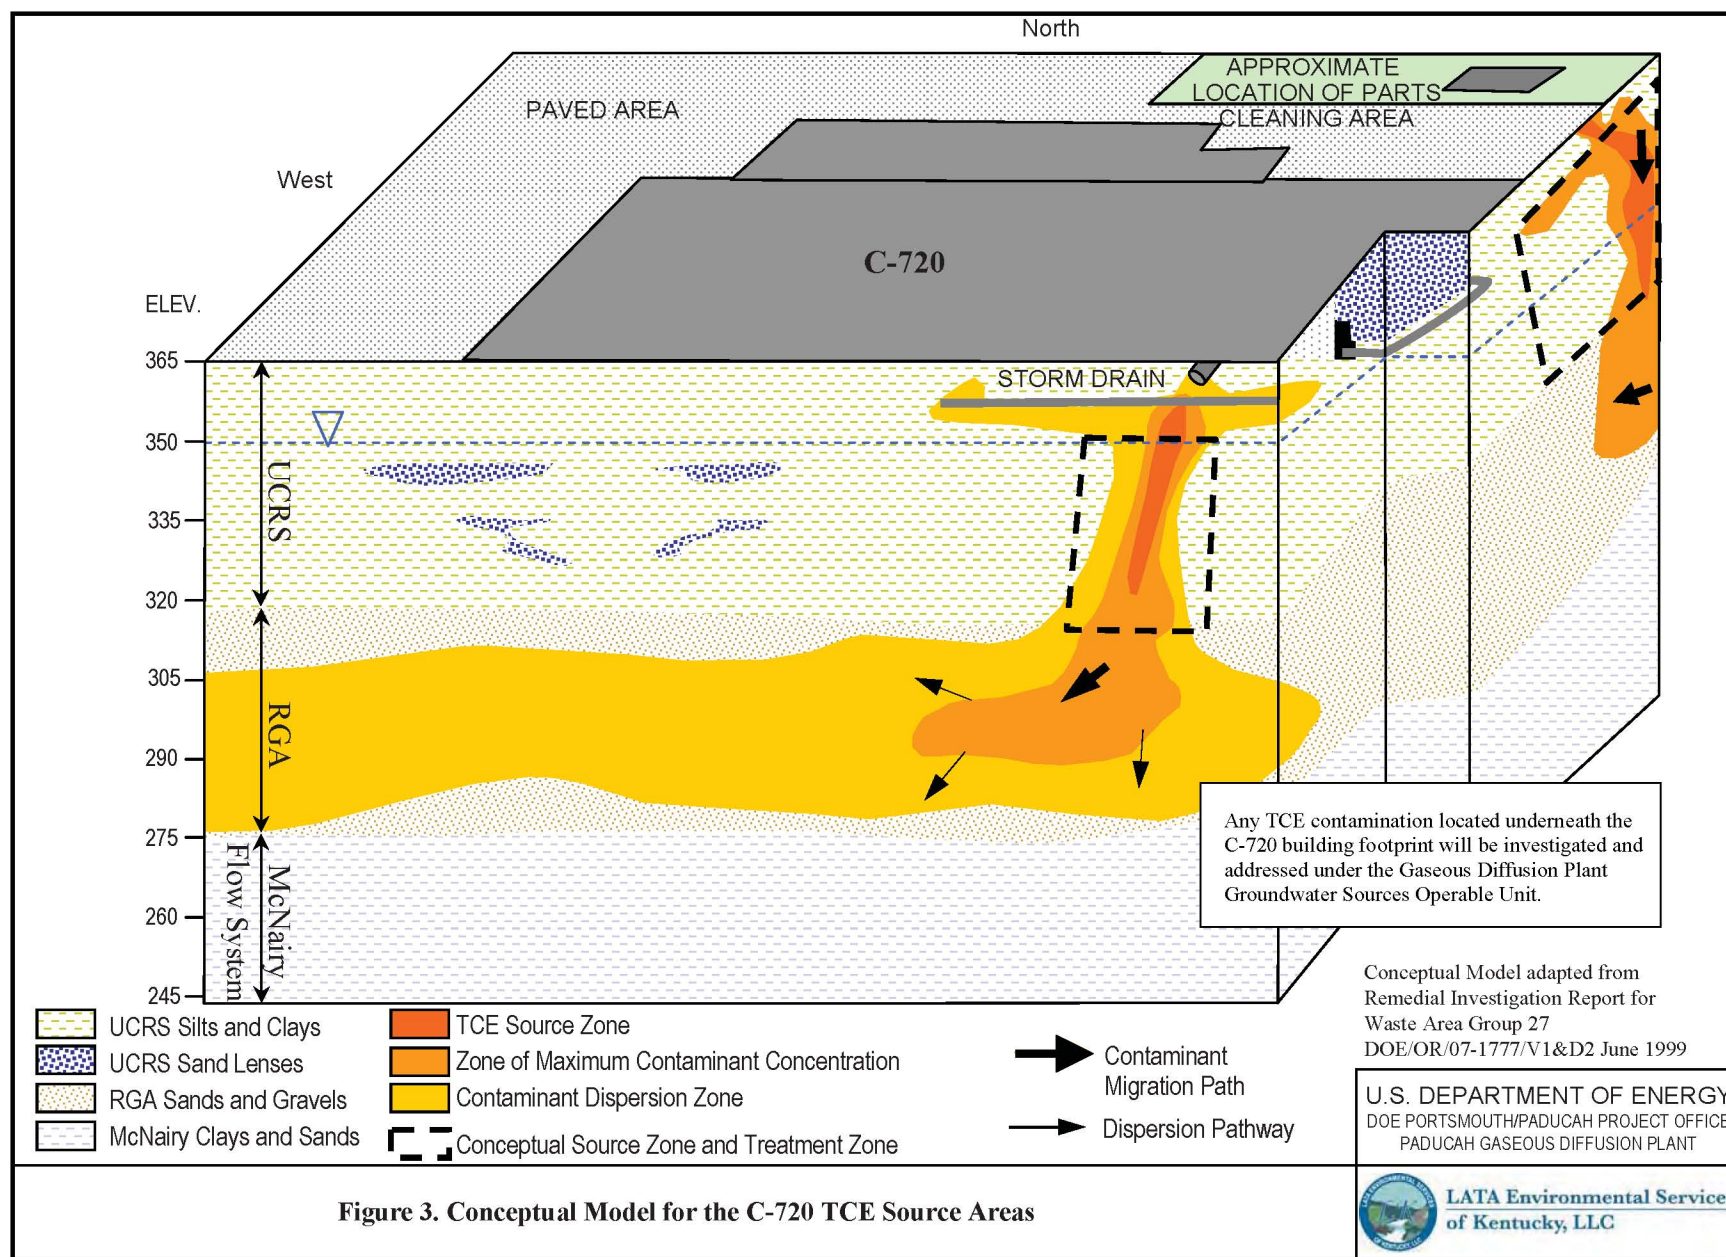

These storm water lines eventually discharge through Outfalls 008 and 009 to Bayou Creek. The interval of contaminated soils extends from the base of the storm sewer (5-ft depth) to the base of the UCRS (60-ft depth). The WAG 27 RI and subsequent Southwest Plume SI results show soil TCE levels are variable throughout the UCRS.

THIS PAGE INTENTIONALLY LEFT BLANK

3. DATA QUALITY OBJECTIVES

This FCR implemented the seven-step data quality objectives (DQO) process as summarized in the remedial design work plan (RDWP) (DOE 2012a) to ensure that sufficient data of the appropriate type and quality are collected to resolve the data needs identified previously. The DQO process is a series of logical steps that guides managers or staff to a plan for the resource-effective acquisition of environmental data. The DQO process is used to establish performance and acceptance criteria, which serve as the basis for designing a plan for collecting data of sufficient quality and quantity to support the goals of the study.

The DQO process includes systematic planning for environmental data collection. This step is based on the widely accepted “scientific method” and includes concepts such as objectivity of approach and acceptability of results. The DQO process consists of seven iterative steps. Since it is an iterative process, one or more of these steps may be revisited as more information is obtained. The first five steps are focused on identifying qualitative criteria such as the nature of the problem, conceptual model, decisions that need to be made, type of data needed, and the analytic approach or decision rule that describes how the data will be used to draw conclusions. The sixth step establishes acceptable quantitative criteria (acceptance criteria) on the quality and quantity of the data to be collected. The seventh step involves a data collection design to generate data that will meet the quantitative and qualitative criteria specified in step 6. The data collection design specifies the type, number, location, and physical quantity of samples and data and quality assurance/quality control measures.

The DQO process as applied to data collection in support of decision making is summarized here:

- (1) **State the Problem**, wherein the problem to be resolved by the data collection activity is sufficiently defined that the focus of the study will be unambiguous.
- (2) **Identify the Decision**, wherein the principal study question that the study will try to resolve is defined. An output of this step is a decision statement that links the principal study question to possible actions that will solve the problem.
- (3) **Identify Inputs to the Decision**, which identifies informational inputs required to resolve the decision statement and determine which inputs require environmental measurements.
- (4) **Define the Study Boundaries**, which defines the spatial and temporal boundaries of the problem.
- (5) **Develop a Decision Rule**, wherein the environmental measurement parameter of interest, the action level, and inputs from previous steps are formulated in a single statement that describes a logical basis for choosing among alternative actions. An output of this step is an “If...then...” statement that defines conditions that would cause the decision maker to choose among alternative actions.
- (6) **Specify Limits on Decision Errors**, wherein the decision makers’ tolerable limits on decision errors are used to establish performance goals for the data collection design.
- (7) **Optimize the Design for Obtaining Data**, wherein an efficient strategy for obtaining data that satisfy the DQOs is identified.

These steps in the DQO process, as they apply to C-720 Northeast and Southeast Sites, are shown in Table 1. The DQO process was conducted for SWMUs 211-A and 211-B and for SWMU 1. Accordingly,

THIS PAGE INTENTIONALLY LEFT BLANK

Table 1. Summary of the DQO Process for the Southwest Plume Source Areas RDSI

[Table A.2 of the Remedial Design Work Plan (DOE 2012a)]

1. State the Problem	2. Identify the Decision			3. Identify Inputs to the Decision	4. Define the Study Boundaries	5. Develop a Decision Rule	6. Specify Limits on Decision Errors	7. Optimize the Design for Obtaining Data
	Principal Study Questions	Alternative Actions	Decision Statement					
<p>Problem Statement: The PGDP’s Southwest Plume consists of groundwater in the RGA contaminated primarily with TCE. The C 747-C Oil Landfarm (SWMU 1) and the C 720 Building Northeast and Southeast Sites (SWMUs 211-A and 211-B, respectively) are sources of contamination to the Southwest Plume. A revised FFS (DOE 2011a) was performed for the three Southwest Plume source areas. These are defined in the Southwest Plume FFS:</p> <p>(1) Treat and/or remove principal threat waste consistent with CERCLA and the National Contingency Plan.</p> <p>(2) (a) Prevent exposure to VOC contamination in the source areas that will cause an unacceptable risk to excavation workers (< 10 ft depth bgs). (b) Prevent exposure to non-VOC contamination and residual VOC contamination through interim land use controls (LUCs) within the Southwest Plume source areas (i.e., SWMU 1, SWMU 211 A, and SWMU 211 B), pending remedy selection as part of the Soils OU and the Groundwater OU.</p> <p>(3) Reduce VOC migration from contaminated subsurface soils in the treatment areas at the Oil Landfarm and C-720 Northeast and Southeast sites so that contaminants migrating from the treatment areas do not result in an exceedance of MCLs in underlying RGA groundwater.</p> <p>Soil cleanup levels, soil boring-averaged TCE UCRS soil concentrations that would meet RAO #3, calculated in the Southwest Plume Revised FFS Appendix C, are listed below:</p> <ul style="list-style-type: none">• Oil Landfarm source area 7.3E-02 mg/kg.• C-720 northeast and southeast source areas 7.5E 02 mg/kg. <p>Previous investigations documented in the WAG 27 RI (DOE 1999) and the SI Report (DOE 2007) did not completely define the areal and vertical extent of soil contaminated above cleanup levels in the source areas. This was identified in the Southwest Plume FFS (DOE 2011a) as a data gap to be resolved in the RDSI.</p> <p>The Southwest Plume Proposed Plan (DOE 2011b) identified <i>In Situ</i> Source Treatment Using Deep Soil Mixing with Interim LUCs (Alternative 3) as the preferred alternative for the C-747-C Oil Landfarm and Final Characterization of source extent and magnitude followed by either <i>In Situ</i> Source Treatment Using Enhanced <i>In Situ</i> Bioremediation with Interim LUCs (Alternative 8) or Long-term Monitoring with Interim LUCs (Alternative 2) as the preferred alternatives for the C-720 Northeast and Southeast Sites. The RDSI will be performed at the Oil Landfarm and Building C-720 to determine better the lateral and vertical extent and distribution of VOCs and source material. The investigation will determine soil and groundwater parameters including geochemical parameters at each of the SWMUs. The extent and distribution of VOCs in the UCRS and upper RGA will impact the design of each remedial alternative. Results from the RDSI will guide decisions regarding the spacing, locations, and depths of augered areas at SWMU 1 and be utilized to design <i>in situ</i> bioremediation at SWMU 211, if this alternative is selected.</p>	<p>PSQ-1: What is the areal extent of TCE and TCE degradation products present at soil boring-averaged concentrations higher than cleanup levels at the Southwest Plume source areas?</p> <p>PSQ-2: What are the SWMU-specific ranges of geotechnical and microbial properties that are important to the design of the remedial actions?</p>	<p>AA-1a: Remediation is required where the soil boring-averaged concentrations of TCE and TCE degradation products in soils of the UCRS exceed cleanup levels.</p> <p>AA-1b: Remediation is not required where the soil boring-averaged concentrations of TCE and TCE degradation products in soils of the UCRS do not exceed cleanup levels.</p>	<p>DS-1: Determine the extent of soil boring-averaged concentrations of TCE and TCE degradation products in soils of the UCRS and upper RGA in the Southwest Plume source areas that exceed cleanup levels and require remediation.</p> <p>DS-2: Determine where additional design-type information is required for the preferred alternatives.</p>	<p>(1) Process knowledge of releases (DOE 2011a).</p> <p>(2) Previous investigation results (DOE 2011a).</p> <p>(3) Description of C 720 source areas in Appendix C of the GWOU FS (DOE 1999).</p> <p>(4) Site conceptual model (DOE 2011a).</p> <p>(5) Southwest Plume FFS Alternatives 2, 3, and 8 descriptions (DOE 2011a).</p> <p>(6) Minimum TCE cleanup levels: 7.3E-02 mg/kg for the C-747-C Oil Landfarm and 7.5E-02 mg/kg for the C-720 Northeast and Southeast Sites (DOE 2011a).</p> <p>(7) TCE DLs by USEC = 5E-03 mg/kg (Watson 2010).</p> <p>(8) Current estimates of source area dimensions shown in Southwest Plume FFS (DOE 2011a).</p> <p>(9) Information requirements for design of the preferred alternatives as follows:</p> <p>- Soil properties common to both soil mixing and <i>in situ</i> bioremediation—fraction organic carbon, and grain size.</p> <p>- Soil properties specific to soil mixing—<i>in situ</i> water content, pH, unconfined compressive strength, compressibility, and index properties.</p> <p>- Soil properties specific to <i>in situ</i> bioremediation—permeability</p> <p>- Groundwater properties needed to assess <i>in situ</i> bioremediation—alkalinity, total and dissolved metals, ferrous iron, major anions, dissolved gasses, and microbial population.</p>	<p><i>Spatial boundaries:</i> The vertical boundary of the study is the upper RGA as feasible (to the base of HU4 interval) at all sites. The results of soil TCE analyses will be provided to EPA and KDEP on a timely basis, and the FFA Parties will confer via teleconference regarding the need for further sampling in the RGA. TCE concentrations above cleanup levels are present at the maximum depths sampled in previous investigations.</p> <p>Surface and subsurface infrastructure is present in the C-720 source areas. The C-720 building bounds the north side of the southeast source area.</p> <p><i>Schedule boundaries:</i> The focused investigation results must be available by the start of development of the 90% remedial design. Fieldwork and lab analysis turnaround is anticipated to require approximately 120 days.</p> <p><i>Operational boundaries:</i> Field investigations and remedial design are constrained by surface and subsurface infrastructure at the C-720 Building. No significant interferences exist at the Oil Landfarm. None of the areas are posted as radiological contamination areas; however, VOCs, metals, and SVOCs are present in soils. An underground storage tank near northeast corner of C-720 may present problems both as subsurface infrastructure and source of petroleum in soils.</p> <p><i>Administrative boundaries:</i> The investigation includes subcontracting for a field laboratory to provide near real time analysis of VOCs in soil and groundwater. Establishment of a field laboratory facility will require development of additional work control.</p>	<p>DR-1: If soil boring-averaged concentrations of TCE and TCE degradation products in soil of the UCRS exceed cleanup levels for a given soil boring, then include the location in the treatment area. If the soil boring-averaged soil concentrations do not exceed cleanup levels, then the area need not be included in the treatment area.</p>	<p>Definitive data quality is assumed for fixed-base and field laboratory analysis.</p> <p>Screening level data quality is assumed for field analyses.</p> <p>The soil boring-averaged contaminant concentration will be derived solely from laboratory analyses from each 5-ft depth interval. The derived soil boring-averaged contaminant concentration will be used as a definitive criterion for comparison with the remediation goal, with no consideration for false rejection rate or false acceptance rate. The sampling plan minimizes decision error by intentionally biasing the location of the sample for laboratory analysis to the location of highest field PID measurement in each 5-ft depth interval.</p>	<p>The selected treatment technologies are able to address the range of small discrete areas to broad areas. There effectively is no minimum or maximum decision area.</p> <p>A combination of field screening instruments, field laboratory analysis, and fixed-base laboratory confirmation analysis will be used to define the outer extent of the area contaminated above the remediation goals.</p> <p>The contaminants of interest are TCE and degradation products: 1,1 dichloroethene; <i>cis</i>-1,2-dichloroethene; <i>trans</i>-1,2-dichloroethene; and vinyl chloride.</p> <p>The targeted depth of investigation is 60 ft bgs, which penetrates through the average depth of the base of the HU4 at SWMU 1 and at the C-720 sites.</p> <p>Where one or more soil boring-averaged contaminant concentrations in a soil boring exceed an RG for a site, contingency borings will be sampled, as necessary (up to the contingency allotment for each site), to bound the remediation area. At SWMU 1, successive contingency boring step outs nominally will be 75 ft. (Multiple contingency borings may extend the investigation beyond 75 ft of the SWMU boundary.) At the C-720 sites, contingency boring step outs must be consistent with the sampling grid except where prevented by the presence of utilities or other obstructions.</p> <p>Parameters as established in quality assurance project plan for precision, accuracy, representativeness, completeness, and comparability.</p> <p>A combination of field measurements and fixed-base laboratory analysis will be used to quantify key design criteria for the preferred alternatives.</p>

THIS PAGE INTENTIONALLY LEFT BLANK

text in Table 1 contains references to SWMU 1, which are artifacts of the scoping process and not intended to provide information for SWMU 1 as part of this final characterization report. The resulting sampling and analysis plan is described in Section 4. The Quality Assurance Project Plan (QAPP) for the RDSI [Attachment A5 of the RDWP (DOE 2012a)] contains measurement quality objectives and data quality indices derived from the project DQOs that ensured quality data was obtained to adequately assess SWMUs 211-A and 211-B. With the few exceptions noted in Section 4.9, all VOC analyses associated with soil and groundwater samples of the RDSI meet measurement performance and other assessment criteria of the project QAPP and are included in this FCR. In addition to the RDSI data, this FCR incorporates data from the WAG 27 RI and Southwest Plume SI, as required by the project DQOs and QAPP (DOE 2012a).

THIS PAGE INTENTIONALLY LEFT BLANK

4. FINAL CHARACTERIZATION/RDSI PLANNING

RDSI planning includes evaluating existing data, DQO scoping, and performing a site visit. Additionally, planning is necessary to protect health and safety, develop the environmental sampling protocol, and identify procedures for handling investigation derived waste. Each activity has been completed and is discussed below.

4.1 EVALUATION OF EXISTING DATA

The preliminary C-720 northeast and southeast site boundaries shown in the Southwest Plume FFS were based on the fate and transport model grid for the C-720 area used in the WAG 27 RI (DOE 1999) and the Southwest Plume SI (DOE 2007). The Groundwater OU Feasibility Study (DOE 2001) also provided estimates of source area locations and dimensions. These estimates were used in the Southwest Plume FFS to define the SWMU 211-A and 211-B boundaries shown on Figures 4 and 5, respectively.

4.2 INITIAL SAMPLING LOCATIONS

By combining data from previous reports as well as information obtained through Oak Ridge Environmental Information System (OREIS), a new general sample boundary area was drawn for the C-720 northeast (i.e., SWMU 211-A) and southeast (i.e., SWMU 211-B) sites (Figures 4 and 5, respectively). The boundaries incorporate historical detections of TCE contamination and extend a short distance outward from these locations. Two sampling locations (720-018 and P4-H7/720-027) in the C-720 northeast site identified during the SI as having at least one TCE detection at a concentration greater than 70 µg/kg are included within the sampling area. Sampling grid spacing and sampling location coordinates presented in Appendix A.1 of the RDWP (DOE 2012a) were used as a guide, but site obstructions and/or sample results were used to determine appropriateness of sample locations.

4.3 DQO SCOPING MEETING

A DQO scoping meeting, attended by subject matter experts, was held February 4, 2010, to gather input to DQO development for the RDSI characterization plan. Subsequently, additional meetings were held, from which data needs specific to the selected remedies were identified. The results from those meetings are presented in the DQOs provided in Section 3.

4.4 SITE WALKDOWNS

The SWMU 211-A and 211-B source areas were visited by the project team prior to commencement of the RDSI characterization plan implementation. The site visits to SWMU 211-A and 211-B were conducted in June and July of 2012. A LATA Kentucky surveyor completed the site walkdown to locate and mark utilities with the aid of plant drawings and coordinates, a handheld Metrotech line locator, and a Geophysical Survey Systems, Inc., ground penetrating radar system, model SIR-3000.

Following the site walkdowns the proposed sample locations at SWMU 211-A required no modifications. The SWMU 211-B proposed locations were shifted toward building C-720 by approximately 5 ft to avoid contact with the sewer drain system.

THIS PAGE INTENTIONALLY LEFT BLANK

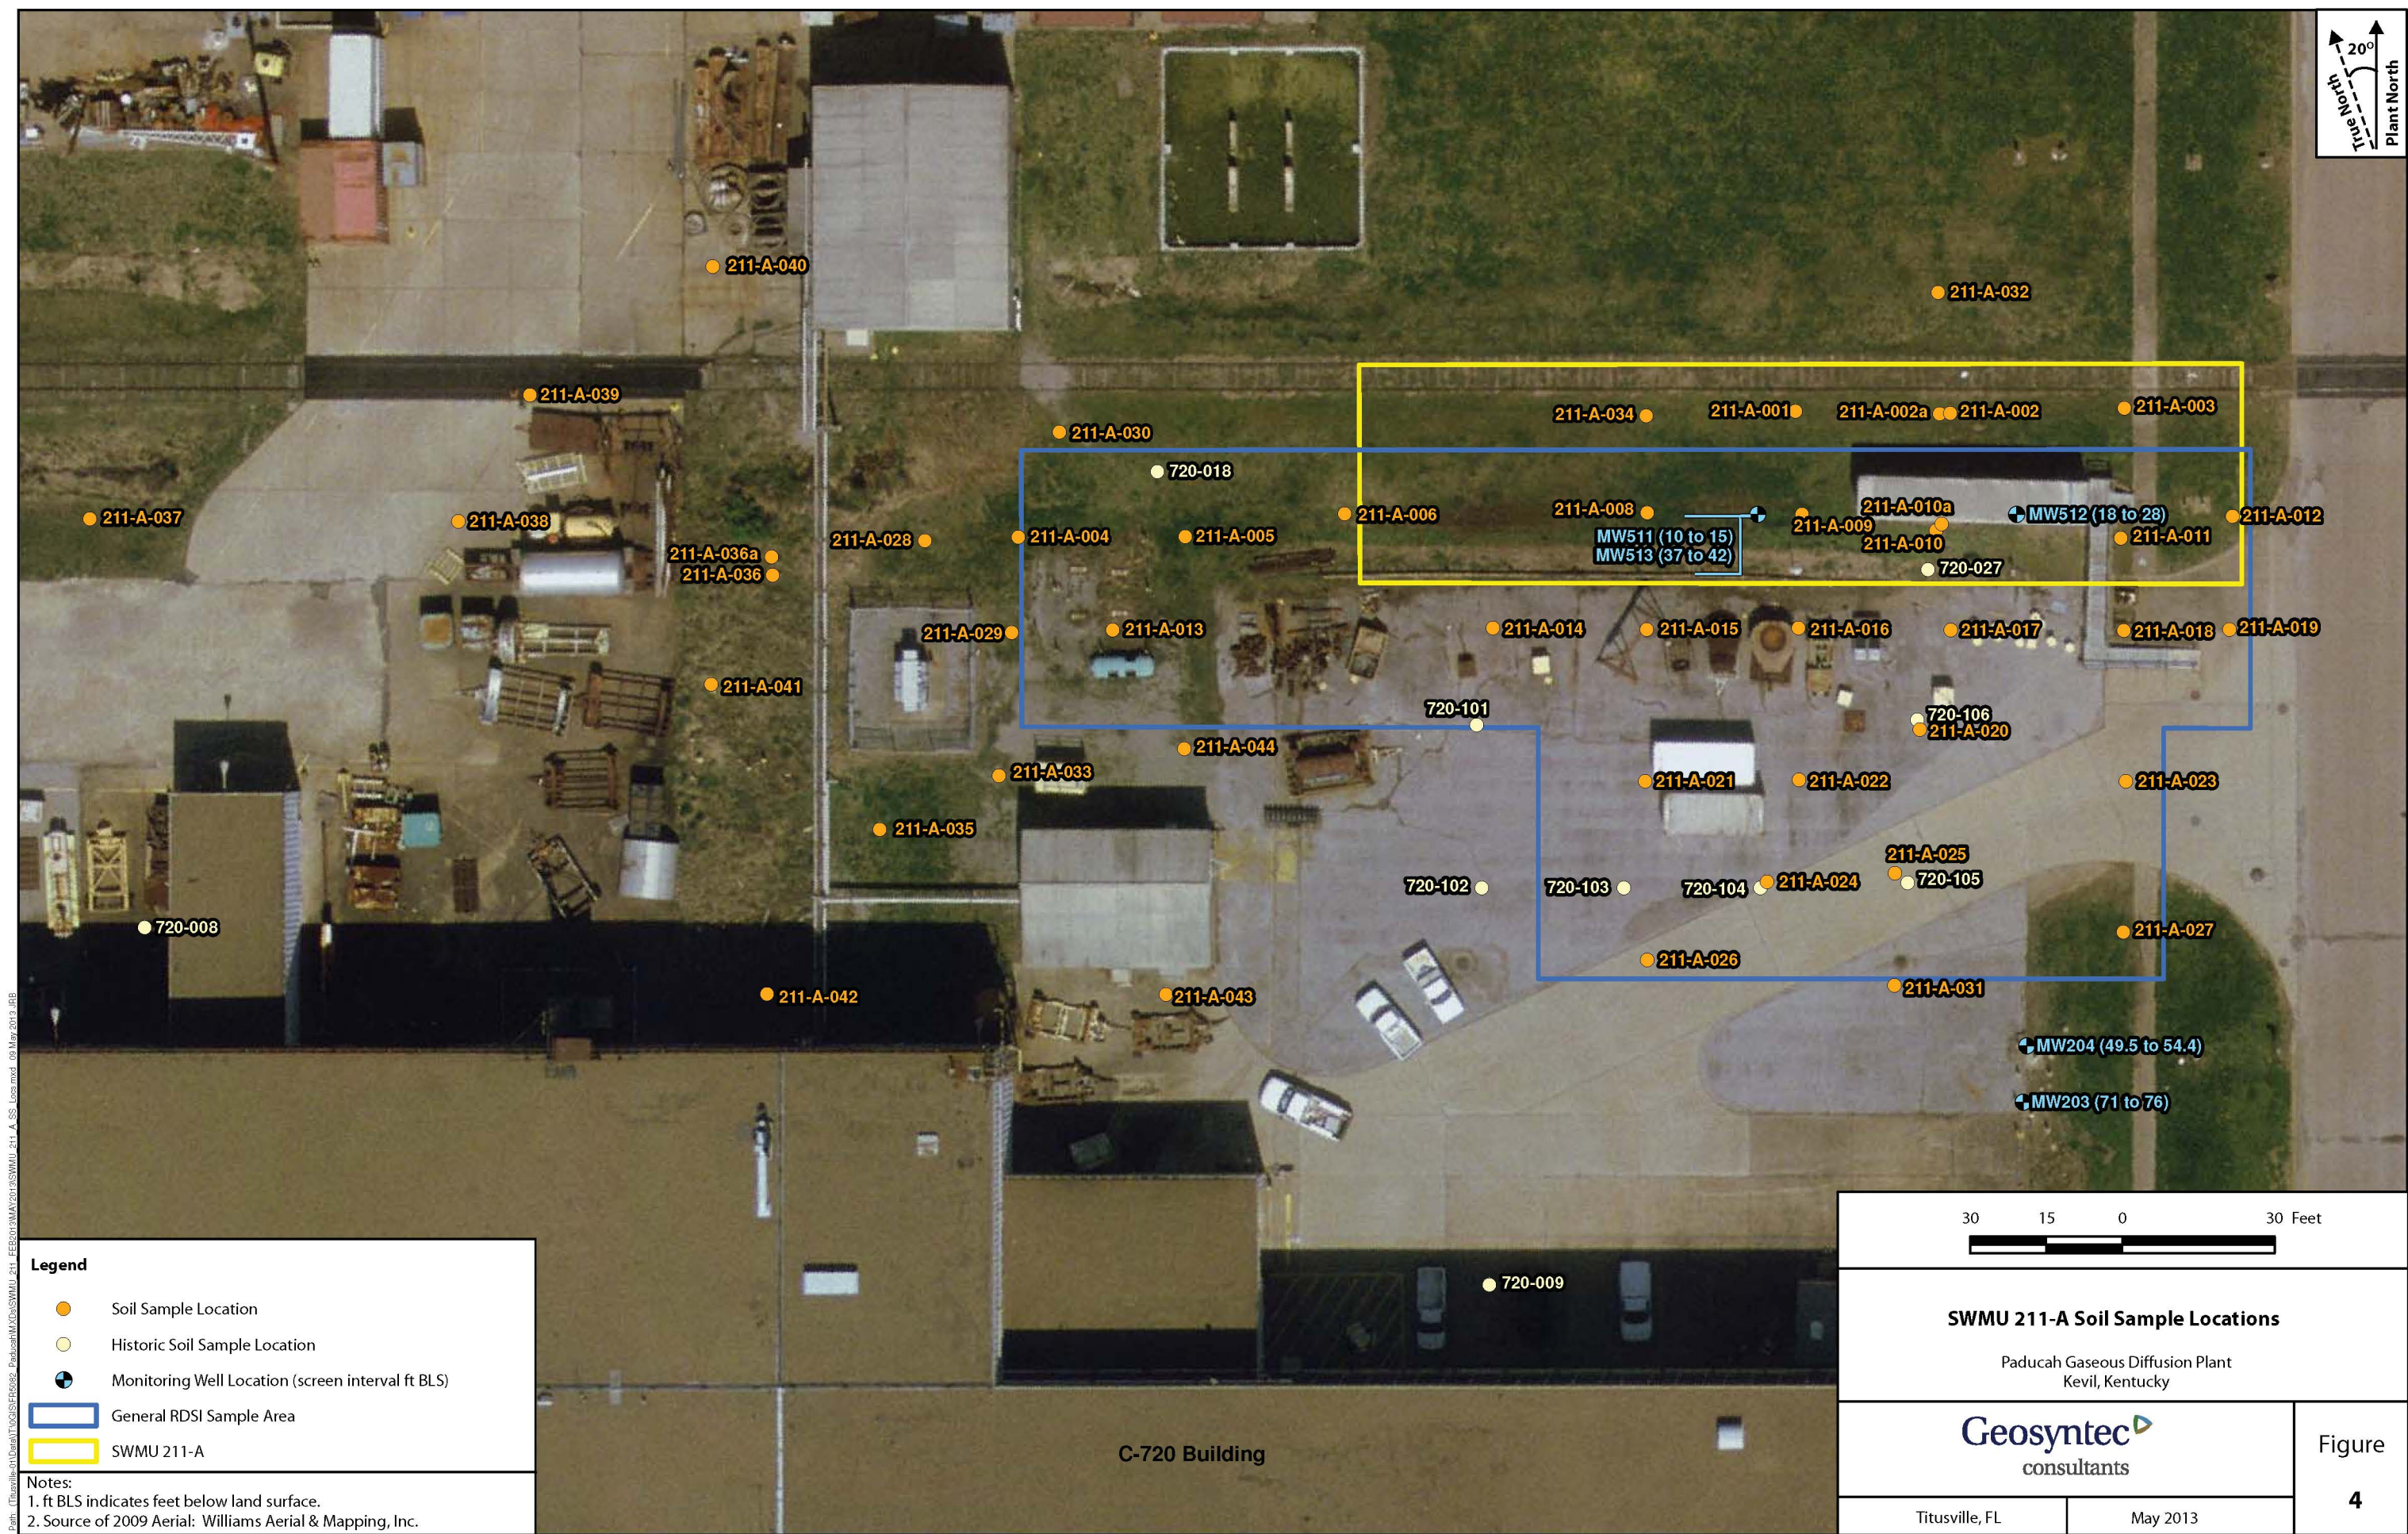


Figure 4. SWMU 211-A Soil Sample Locations

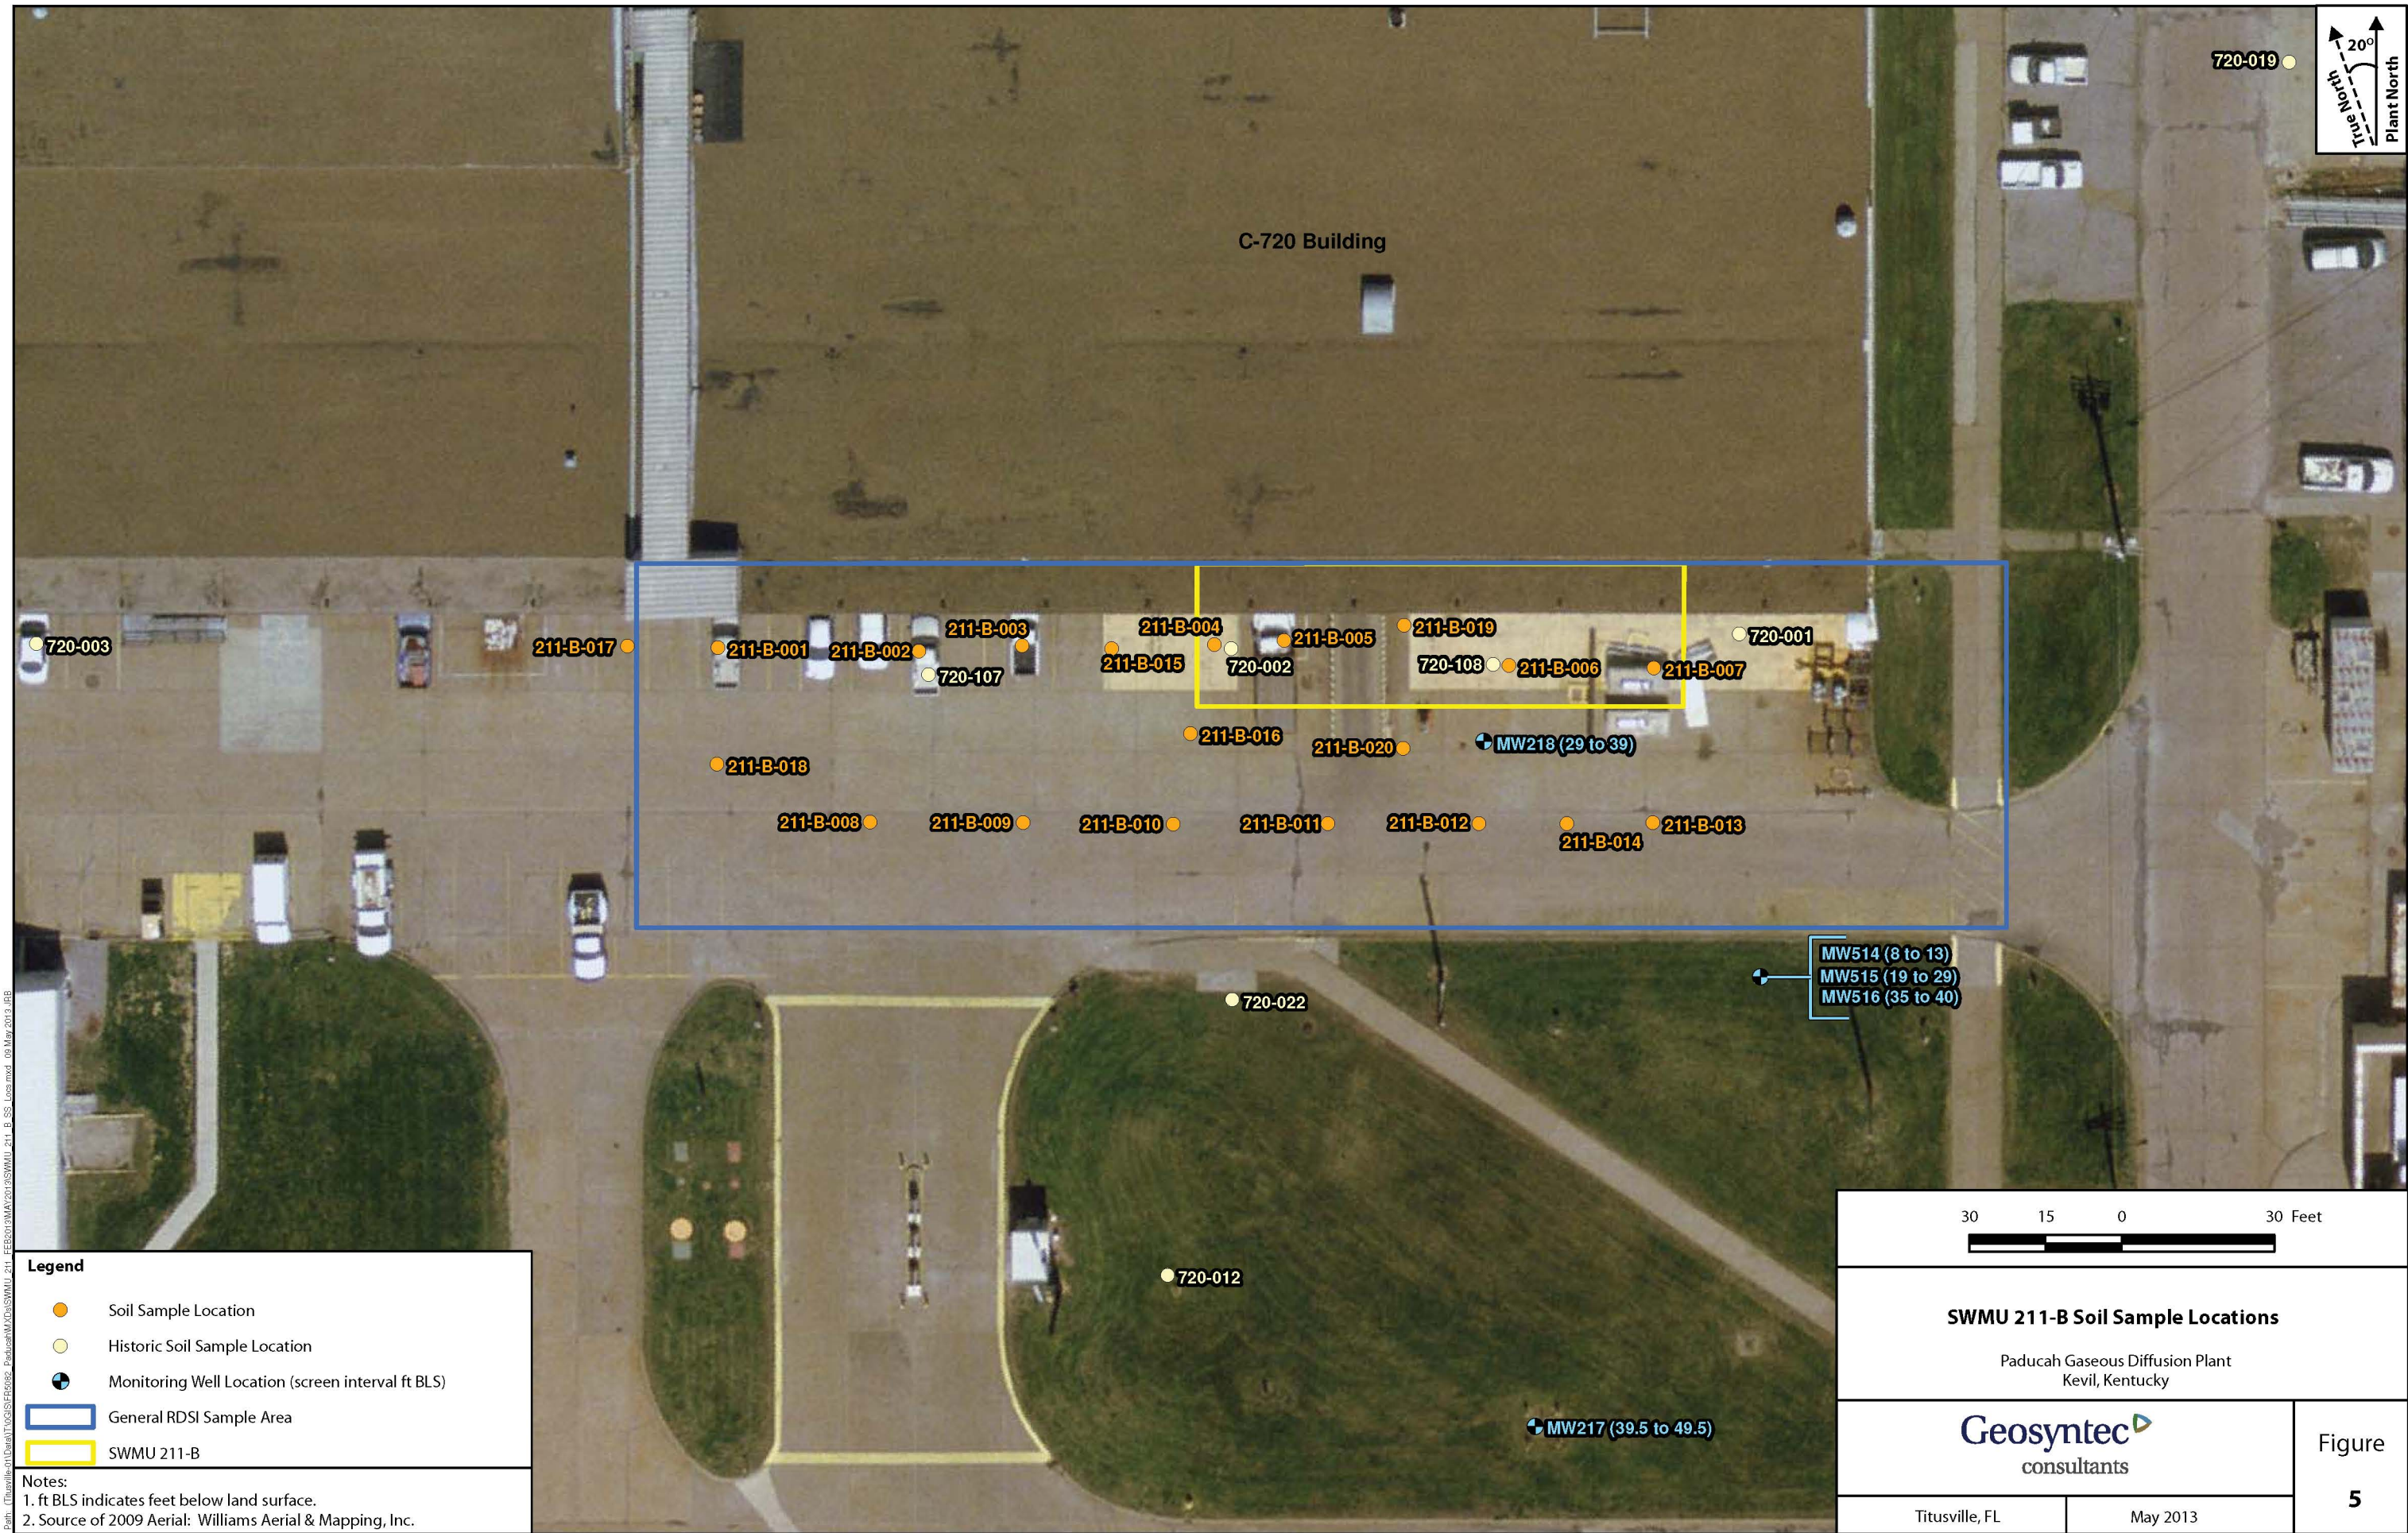


Figure 5. SWMU 211-B Soil Sample Locations

4.5 HEALTH AND SAFETY

Environmental sampling to protect the health and safety of the workers is an important part of any related project. During drilling and sampling operations, a photoionization detector (PID) was used to determine if VOCs were present at hazardous levels in the workers' breathing zone. Personal samplers were also used to establish baseline values early in the project. Monitoring for radioactive contamination was conducted according to the radiation work permit. Additional details and requirements for health and safety sampling are contained in the *Health and Safety Plan for the Southwest Plume Remedial Design Support Investigation at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, PAD-PROJ-0133/R0 (LATA Kentucky 2012).

4.6 SOIL SAMPLING STRATEGY

The SWMU 211-A and 211-B boundaries shown in the Southwest Plume FFS were based on the fate and transport model grid for the C-720 area used in the WAG 27 RI (DOE 1999) and the Southwest Plume SI (DOE 2007). The Groundwater OU Feasibility Study (DOE 2001) also provided estimates of source area locations and dimensions. These estimates were used in the Southwest Plume FFS to define the SWMU boundaries. The data from these three reports and information obtained through OREIS were combined and a sample boundary area was presented in the RDSI as shown in Figures 4 and 5. The boundaries encompassed historical detections of TCE and extended a short distance outward from the detections and provided a general starting point for this RDSI. Figures 4 and 5 show the actual sampling locations for SWMUs 211-A and 211-B, respectively. Table 2 provides PGDP coordinates for the sampling locations depicted in Figure 4 for SWMU 211-A. Table 3 provides PGDP coordinates for the sampling locations depicted in Figure 5 for SWMU 211-B.

Soil borings 211-A-001 through 211-A-036 and 211-B-001 through 211-B-020 were performed from August 16 through October 19, 2012. Follow-on sampling at SWMU 211-A (soil borings 211-A-037 through 211-A-044) was performed from February 25 through March 6, 2013. Soil borings were completed using an AMS 9500 VTR rig with Geoprobe direct push technology (DPT) DT-22 tooling and polyvinyl chloride sample liners, provided by Chase Environmental Group, Inc. (Kevil, Kentucky).

4.7 MONITORING WELL INSTALLATION

MWs were installed at SWMU 211-A (MW511, MW512, and MW513) and SWMU 211-B (MW514, MW515, and MW516) in August 2012 using hollow stem auger drilling methods. Tables 4 and 5 provide well construction details for the MWs installed at SWMU 211-A and SWMU 211-B, respectively. The locations of the newly installed MWs are presented on Figure 4 (SWMU 211-A) and Figure 5 (SWMU 211-B).

At SWMU 211-A, MW511 and MW513 were installed as a cluster within a common borehole using a 6.25-inch inside diameter (ID) auger, and MW512 was installed using a 4.25-inch ID auger. The MWs were constructed of 2-inch diameter stainless screen and riser, with screen intervals of 10 to 15 ft bgs, 359.03 to 364.03 ft amsl (MW511), 18 to 28 ft bgs, 346.68 to 356.68 ft amsl (MW512), and 37 to 42 ft bgs, 332.02 to 337.02 ft amsl (MW513). MW construction logs are included in Appendix A.

At SWMU 211-B, MW514, MW515, and MW516 were installed as a cluster within a common borehole using a 8.25-inch ID auger. The MWs were constructed of 2-inch diameter stainless screen and riser, with screen intervals of 8 to 13 ft bgs, 359.73 to 364.73 ft amsl (MW514), 19 to 29 ft bgs, 343.75 to

353.75 ft amsl (MW515), and 35 to 40 ft bgs, 332.77 to 337.77 ft amsl (MW516). MW construction logs are included in Appendix A.

Table 2. PGDP Plant Coordinates for SWMU 211-A Source Area Sampling Locations

Station	Plant Coordinates		Elevation [ft amsl]
	Northing [ft]	Easting [ft]	
211-A-001	-2023.2110	-5059.5510	374.598
211-A-002	-2023.6120	-5029.1430	374.504
211-A-002a	-2023.7790	-5031.2360	374.476
211-A-003	-2022.6390	-4994.8430	374.913
211-A-004	-2048.0820	-5212.8110	373.283
211-A-005	-2047.9830	-5179.8330	373.701
211-A-006	-2043.4640	-5148.4270	374.090
211-A-008	-2043.2190	-5088.8040	374.092
211-A-009	-2043.5870	-5058.3150	374.263
211-A-010	-2046.7240	-5031.9270	374.330
211-A-010a	-2045.4290	-5030.7210	374.359
211-A-011	-2048.2000	-4995.4900	375.221
211-A-012	-2043.9840	-4973.5470	375.458
211-A-013	-2066.2640	-5194.1350	374.351
211-A-014	-2065.9010	-5119.3050	374.469
211-A-015	-2066.2010	-5088.9670	374.601
211-A-016	-2065.9450	-5059.0230	374.653
211-A-017	-2066.3420	-5029.0030	374.894
211-A-018	-2066.3810	-4994.8990	374.865
211-A-019	-2066.1750	-4974.1430	374.771
211-A-020	-2085.9880	-5035.1640	374.833
211-A-021	-2096.0950	-5089.2170	374.593
211-A-022	-2095.8230	-5058.8970	374.620
211-A-023	-2096.1320	-4994.5060	374.620
211-A-024	-2115.8920	-5065.2080	374.350
211-A-025	-2114.2460	-5040.0200	374.210
211-A-026	-2131.2640	-5088.8230	374.296
211-A-027	-2125.7710	-4995.0460	374.622
211-A-028	-2048.7590	-5231.1660	373.633
211-A-029	-2066.7480	-5214.0940	374.274
211-A-030	-2027.3620	-5204.6280	373.823
211-A-031	-2136.2860	-5040.0740	373.999
211-A-032	-1999.9050	-5031.5160	373.362
211-A-033	-2094.9760	-5216.5300	374.359

**Table 2. PGDP Plant Coordinates for SWMU 211-A Source Area
Sampling Locations (Continued)**

Station	Plant Coordinates		Elevation [ft amsl]
	Northing [ft]	Easting [ft]	
211-A-034	-2024.1310	-5089.0630	374.423
211-A-035	-2105.5170	-5240.0280	373.994
211-A-036	-2055.4830	-5261.2480	374.472
211-A-036a	-2051.9460	-5261.3630	374.415
211-A-037	-2044.5470	-5395.8070	373.516
211-A-038	-2045.0350	-5323.1710	374.499
211-A-039	-2020.1390	-5309.1090	374.571
211-A-040	-1994.8890	-5272.9960	374.583
211-A-041	-2077.0010	-5273.3620	373.935
211-A-042	-2137.9710	-5262.2770	373.996
211-A-043	-2138.0230	-5183.7380	374.863
211-A-044	-2089.7250	-5180.1200	374.396

**Table 3. PGDP Plant Coordinates for SWMU 211-B Source Area
Sampling Locations**

Station	Plant Coordinates		Elevation [ft amsl]
	Northing [ft]	Easting [ft]	
211-B-001	-2607.6980	-5240.8990	371.916
211-B-002	-2608.4570	-5201.4670	371.965
211-B-003	-2607.3650	-5181.1500	372.000
211-B-004	-2607.1870	-5143.3300	371.941
211-B-005	-2606.3070	-5129.5960	371.940
211-B-006	-2611.2800	-5085.4310	371.960
211-B-007	-2611.7170	-5056.8590	372.028
211-B-008	-2642.0290	-5211.0330	371.474
211-B-009	-2642.0580	-5180.9140	371.359
211-B-010	-2642.3830	-5151.4210	371.331
211-B-011	-2642.3070	-5120.9840	371.318
211-B-012	-2642.2870	-5091.2570	371.587
211-B-013	-2642.1370	-5057.0470	371.850
211-B-014	-2642.3210	-5074.0080	371.668
211-B-015	-2607.9310	-5163.5150	371.996
211-B-016	-2624.6240	-5148.0390	371.569
211-B-017	-2607.4590	-5258.7540	371.976
211-B-018	-2630.5500	-5241.1330	371.646
211-B-019	-2603.3600	-5105.9730	371.996
211-B-020	-2627.5870	-5106.1450	371.664

Table 4. PGDP SWMU 211-A Well Construction Details

Well Number	Date Installed	Riser Casing Material 1	Riser Casing Diameter [in]	Screened Zone	HU	Top of Screen [ft bgs]	Bottom of Screen [ft bgs]	Screen Material 1	Screen Diameter [in]	Datum Elevation [ft NAVD88]	Datum Reference	Plant Coordinates	
												Northing [ft]	Easting [ft]
Preexisting Wells													
MW203	4/3/1991	SLS	2	RGA	HU5	71	76	SLS	2	377.91	TOC	-2,159.20	-5014.80
MW204	4/5/1991	SLS	2	UCRS	HU3	49.5	54.4	SLS	2	378.06	TOC	-2148.10	-5014.10
RDSI-installed Wells													
MW511	8/27/2012	SLS	2	UCRS	HU1	10	15	SLS	2	376.82	TOC	-2042.42	-5176.15
MW512	8/24/2012	SLS	2	UCRS	HU2	17.8	27.8	SLS	2	377.59	TOC	-2044.32	-5043.47
MW513	8/27/2012	SLS	2	UCRS	HU3	37	42	SLS	2	376.82	TOC	-2042.42	-5176.15

Notes:

1. SLS—stainless steel
2. PVC—polyvinyl chloride
3. NAVD88—North American Vertical Datum of 1988
4. TOC—top of casing
5. TIC—top of internal casing

Table 5. PGDP SWMU 211-B Well Construction Details

Well Number	Date Installed	Riser Casing Material	Riser Casing Diameter [in]	Screened Zone	HU	Top of Screen [ft bgs]	Bottom of Screen [ft bgs]	Screen Material	Screen Diameter [in]	Datum Elevation [ft NAVD88]	Datum Reference	Plant Coordinates	
												Northing [ft]	Easting [ft]
Preexisting Wells													
MW217	12/18/91	PVC	2	UCRS	HU3	39.5	49.5	PVC	2	378.56	TIC	-2760.66	-5080.28
MW218	1/30/1992	PVC	2	UCRS	HU2/3	29.0	39.0	PVC	2	371.63	TIC	-2626.16	-5090.38
RDSI-installed Wells													
MW514	8/27/2012	SLS	2	UCRS	HU1	7.8	12.8	SLS	2	375.67	TOC	-2673.93	-5036.81
MW515	8/27/2012	SLS	2	UCRS	HU2	18.8	28.8	SLS	2	375.67	TOC	-2673.93	-5036.81
MW516	8/27/2012	SLS	2	UCRS	HU3	34.8	39.8	SLS	2	375.67	TOC	-2673.93	-5036.81

Notes:

1. SLS—stainless steel
2. NAVD88—North American Vertical Datum of 1988
3. TOC—top of casing

4.8 INVESTIGATION-DERIVED WASTE

Investigation-derived waste generated during the performance of fieldwork associated with this FCR is considered part of the Southwest Plume RDSI. As such, only a portion of the following inventory of the Southwest Plume RDSI-generated waste is directly associated with SWMUs 211-A and 211-B.

- Nine ST-90 boxes and two 55-gal drums of soil/personal protective equipment and debris (approximately 825 ft³).
 - All but one of the ST-90 boxes and the two 55-gal drums have been disposed of at the C-746-U Contained Landfill [permitted for operation by the Kentucky Division of Waste Management (Solid Waste Landfill Permit Number 073-00045)].
 - Sample results for the remaining ST-90 box have been received from the laboratory. The results are being processed in documentation for disposal at the C-746-U Contained Landfill.
- One 55-gal drum of personal protective equipment from decontamination activities (approximately 7.4 ft³).
 - The 55-gal drum has been disposed of at the C-746-U Landfill.
- Five 1,200-gal poly tanks of decontamination water (approximately 802 ft³).
 - The decontamination water has been treated for suspended solids and staged in two tanks.
 - Of the two tanks, one has been characterized and approved for discharge at C-612. Characterization data for the second tank have been received and are being processed for approval for discharge through C-612.

4.9 DATA EVALUATION

Data verification, validation, and assessment were performed for the project data in accordance with PAD-ENM-5003, *Quality Assured Data* (LATA Kentucky 2010). The data evaluation results are stored in Paducah Project Environmental Measurements System and are transferred with the data to Paducah OREIS.

The data evaluation for the RDSI identified the following variances. At SWMU 211-A, a total of 31 planned borings and 10 contingency borings were allotted. The investigation sampled 30 of the planned borings and 12 contingency borings. DOE sampled the 2 additional contingency borings to better characterize the extent of the VOC contamination. (For SWMU 211-B, a total of 17 planned borings and 12 contingency borings were available. Only the original 17 planned borings and 2 contingency borings were required to characterize the extent of contamination.)

The investigation soil analyses include a single exceedance of the laboratory reporting limits required by the RDWP (DOE 2012a). The analysis for 1,1-DCE in the sample from 211-A-036 at 22 ft depth (352.47 ft amsl) reports a result of 31 “U” µg/kg; the reporting limit for 1,1-DCE is required to be 10 µg/kg. This variance is anticipated to have minimal impact to the project. Analyses of 1,1-DCE for deeper samples in this soil boring significantly exceed the 1,1-DCE remediation goal (137 µg/kg) while analyses for shallower samples report nondetect levels.

Groundwater analyses include exceedances of the required laboratory reporting limit only for *trans*-1,2-DCE and vinyl chloride in 1 of 3 samples from MW204 and the lone sample from MW513 (both SWMU 211-A MWs). In MW204, the highest reporting limits (2 µg/L *trans*-1,2-DCE and 4 µg/L VC) are twice the required reporting limits. Because all three results for these analytes in MW204 are “U” qualified, this variance has little impact to the groundwater assessment.

In the lone MW513 groundwater sample, the reporting limits (10 µg/L *trans*-1,2-DCE and 20 µg/L VC) are 10 times the required reporting limits (due to a 10 × dilution of the sample); however, analyses for collocated wells MW511 and MW512 (nondetect levels of 1 µg/L *trans*-1,2-DCE and 2 µg/L VC in both wells) provide good characterization of UCRS groundwater quality at SWMU 211-A. The RDWP (DOE 2012a) identified method ASTM D4360-96 or equivalent for constant head injection tests of the RDSI. The correct method reference is ASTM D4630-96.

Level IV data validation for SWMUs 211-A and 211-B was performed at a rate of 10%, as required by the RDSI characterization plan. Samples from areas with higher TCE concentrations were targeted for data validation. No data was rejected during data validation. During validation, the soils and groundwater data were found to meet the project acceptance criteria except as noted below.

- **SWMU 211-A soil samples (VOCs)**

- Analyses from the validated samples showed compliance with the quality control requirements set forth by the analytical methods. The data was considered valid and acceptable. Chains of custody were reviewed and found to be compliant. All samples were analyzed within the acceptable holding times. The instrument performance check was performed within the required time period and met all acceptance criteria. All initial calibrations were performed at the proper frequency. All continuing calibrations were performed at the proper frequency. Method blanks were analyzed at the proper frequency. Results for VOC analyses for 12 samples were qualified “J” (indicating estimated values) due to surrogate recovery results as follows:

- 211-A-028 at 48.0 ft depth/325.63 ft amsl
- 211-A-028 at 50.5 ft depth/323.13 ft amsl
- 211-A-029 at 28.5 ft depth/345.77 ft amsl
- 211-A-029 at 32.0 ft depth/342.27 ft amsl
- 211-A-029 at 48.5 ft depth/325.77 ft amsl
- 211-A-030 at 32.5 ft depth/341.32 ft amsl
- 211-A-036 at 22.0 ft depth/352.47 ft amsl
- 211-A-036 at 26.5 ft depth/347.97 ft amsl
- 211-A-036 at 31.5 ft depth/342.97 ft amsl
- 211-A-036 at 35.5 ft depth/338.97 ft amsl
- 211-A-036 at 44.5 ft depth/329.97 ft amsl
- 211-A-036 at 47.5 ft depth/326.97 ft amsl

All internal standards were analyzed at the appropriate frequency and met acceptance criteria. Results for VOC analyses for five samples were qualified “J” due to MS/MSD (matrix spike/matrix spike duplicate) recoveries as follows:

- 211-A-004 at 24.9 ft depth/348.38 ft amsl
- 211-A-028 at 38.5 ft depth/335.13 ft amsl
- 211-A-028 at 55.1 ft depth/318.53 ft amsl
- 211-A-029 at 28.5 ft depth/345.77 ft amsl
- 211-A-036 at 44.5 ft depth/329.97 ft amsl

The calculated RPD (relative percent difference) was exceeded for the parent sample and its duplicate for 1,1-DCE and TCE. The results for these two analytes were “J” qualified in the parent and duplicate samples.

- 211-A-029 at 32 ft depth/342.27 ft amsl

LCS (laboratory control sample) and LCSD (laboratory control sample duplicate) samples were analyzed at the proper frequency. Review of calculations met acceptance criteria.

- **SWMU 211-B soil samples (VOCs)**

- Analyses from the validated samples showed compliance with the quality control requirements set forth by the analytical methods. The data was considered valid and acceptable. Chains of custody were reviewed and found to be compliant. All samples were analyzed within the acceptable holding times. The instrument performance check was performed within the required time period and met all acceptance criteria. All initial calibrations were performed at the proper frequency. All continuing calibrations were performed at the proper frequency. Method blanks were analyzed at the proper frequency. The proper surrogate standards were analyzed at the appropriate frequency. No data was qualified due to surrogate recovery limits. All internal standards were analyzed at the appropriate frequency and met acceptance criteria. Results for VOC analyses for two samples were qualified “J” due to MS/MSD recoveries:

- 211-B-005 at 4.9 ft depth/367.04 ft amsl
- 211-B-19 at 32.0 ft depth/340.00 ft amsl

The calculated RPD was exceeded for the parent sample and duplicate samples for TCE. TCE results were “J” qualified in the parent and duplicate samples:

- 211-B-005 at 29.5 ft depth/342.44 ft amsl

LCS and LCSD samples were analyzed at the proper frequency. Review of calculations met acceptance criteria.

- **SWMU 211-A and 211-B water samples (VOCs, metals, chloride, nitrate, sulfate)**

- Analyses from the validated samples showed compliance with the quality control requirements set forth by the analytical methods. The data was considered valid and acceptable. Chains of custody were reviewed and found to be compliant. All samples were analyzed within the acceptable holding times.
- **VOCs**—VOCs results for two samples were qualified as either “J” or “UJ” (indicating not detected at or below the lowest concentration reported but estimated) due to the presence of headspace in the samples (MW162 and MW218). The instrument performance check was performed within the required time period and met all acceptance criteria. All initial calibrations were performed at the proper frequency. All continuing calibrations were performed at the proper frequency. No qualification of the data was required based on the evaluation of the continuing calibration. Method blanks were analyzed at the proper frequency. Results for two samples were qualified due to surrogate recoveries (MW161 and MW203). All internal standards were analyzed at the appropriate frequency and met acceptance criteria. Some results were qualified “J” or “UJ” based on low recovery observed in both the MS/MSD and the LCS. The RPD for the duplicate sample analyses were within

acceptance criteria. Some results were “J” or “UJ” qualified due to LCS and LCSD acceptance criteria (MW161, MW162, MW203, MW204, MW217, and MW218). Review of calculations met acceptance criteria.

- **Metals**—All initial and continuing calibrations were within the acceptance criteria. All method and continuing calibration blanks were analyzed at the proper frequency. There was no qualification of data based on recoveries of the method blanks. The MS/MSD samples were analyzed at the proper frequency. Manganese in one sample was qualified “J” based on the recovery in the MS/MSD (MW516). The percent recoveries for the post digestion spike were all within the acceptance criteria. Chromium and iron in a sample and duplicate were qualified “J” based on exceeding the RPD (MW203). Iron and total and dissolved manganese were qualified “J” in a sample and duplicate based on exceeding the RPD (MW509). LCS samples were analyzed at the proper frequency. All LCS recoveries were within acceptance criteria. Dissolved manganese for one sample was “J” qualified based on the serial dilution recovery (MW516). Interference check sample results were all within the acceptance criteria. All internal check standards were within the acceptance criteria. Review of calculations met acceptance criteria.
- **Chloride, Nitrate, and Sulfate**—All calibrations were within the acceptance criteria. All method blanks were run at the proper frequency. All method blanks were confirmed nondetect. LCS samples were analyzed at the proper frequency and were within acceptance criteria. MS/MSD samples were analyzed at the proper frequency and were within acceptable limits. Review of calculations met acceptance criteria.
- **Methane, Ethane, and Ethene**—All initial and continuing calibrations were performed at the proper frequency and within acceptance criteria. A review of raw data, including chromatograms of standards used were found to be acceptable. Method blanks were analyzed at the proper frequency. Raw data were reviewed and confirmed no detections present in the method blank. All percent recoveries for the MS and MSD were within acceptance criteria. The LCS and LCSD samples were analyzed at the proper frequency and were all within the acceptance criteria. Calculations were reviewed and confirmed.

All soil samples were reported on a dry weight basis. All holding times for soil and water samples were met. Field blanks and equipment blanks were collected at a rate of 5%. All results were acceptable. Trip blanks were collected one per cooler. All results were acceptable.

4.10 DATA ASSESSMENT AND VERIFICATION

Data assessment and verification were performed on 100% of the data. Data verification includes checking methods, units, reporting limits, holding times, and analytical completeness. Exceptions to the data verification were noted in the data assessment package and were considered during data assessment.

Data assessment considered results of the Level IV data validation, data verification, laboratory data qualifiers, laboratory comments, and sampler’s comments. All data were found to be of known quality, and it was determined that decisions could be made from the data based on the review.

The RDSI field investigation achieved a high degree of completeness as summarized below. For the SWMU 211-A soils VOC characterization, sampling and analysis accomplished the following:

- **Number of soil borings**

- Twenty-six of 27 initially located soil borings were sampled.³
- Four of four additional borings were sampled in the vicinity of the planned soil boring with highest average VOC levels (211-A-038 through 211-A-041).
- Twelve contingency borings were sampled (211-A-029 through 211-A-037 and 211-A-042 through 211-A-044), of 10 originally planned contingency borings.

- **Number of VOC analyses**

- Five hundred forty-one of a potential 548 sample depths (98.7%) were characterized in the soil borings.
- Five thousand eight hundred eighty-two of a potential of 5,954 field PID readings (98.8%) were measured in the soil borings.

For SWMU 211-B soils VOC characterization, sampling analysis accomplished the following:

- **Number of soil borings**

- Thirteen of 13 initially located soil borings were sampled.
- Four of four borings were sampled in the vicinity of the planned soil boring with highest average VOC levels (211-B-015, 211-B-016, 211-B-019, and 211-B-020).
- Two of the allotted six contingency borings were sampled (211-B-017 and 211-B-018).

- **Number of VOC analyses**

- Two hundred forty-six of a potential of 249 sample depths (98.8%) were characterized in the soil borings.
- Two thousand six hundred fifty-one of a potential of 2,693 field PID readings (98.4%) were measured in the soil borings.

4.11 UNCERTAINTY EVALUATION

Factors that may affect uncertainty in site characterization data sets may include the following:

- Results and frequencies of quality control samples, quality control exceedances, and qualifiers;
- Biases and trends in the data; and
- Project completeness.

³ The FFA parties concurred to not sample soil boring 211-A-007.

As documented in Section 4.9, quality control exceedances and the occurrence of data qualifiers are sparse. Consequently, these factors are not envisioned to affect substantially the utility of the data in regard to estimation of the extent and mass/volume of VOCs in the UCRS and upper RGA at SWMUs 211-A and 211-B and associated decisions with regard to selection of a final remedy for these sites.

Sampling and analysis protocols identified in the RDSI characterization plan were selected to minimize the loss of VOCs, thereby reducing the potential or uncertainty associated with underestimating the presence of VOCs. The field investigation followed the characterization plan for sample technique and laboratory methods. A fixed-based laboratory, offering same day courier service with overnight analyses, was used for the VOC analyses and provided a degree of quality control that was superior to that which would have been provided if VOC analyses were conducted using the field laboratory option contained in the characterization plan.

The objective of the RDSI was to characterize the extent and mass/volume of VOC soil contamination in the UCRS and upper RGA at SWMUs 211-A and 211-B. The RDSI characterization plan (provided in DOE 2012a) was designed specifically to reduce the potential for decision error through an underestimation of mass through the identification and selection of the highest VOC concentration samples. Each 60-ft deep borehole core was divided into 5 ft segments over which field screening using a PID was conducted to identify intervals for sample collection and shipment for off-site VOC analysis. This approach was intended to ensure that the resulting VOC mass/volume calculations did not underrepresent the VOC mass/volume present in the subsurface. This approach essentially imposed a bias on the resulting VOC mass/volume calculations for each interval and correspondingly served to reduce the potential for underestimating VOC mass/volume.

Field PID measurements were a primary basis for selection of the sample interval within each 5-ft core from the soil borings.⁴ These PID responses were reviewed to assess the potential for trends and biases to be present in the data set. The distribution of maximum PID readings in each 5-ft core is as follows:

	SWMU 211-A		SWMU 211-B	
# Cores	408		228	
# Measurements	4,488		2,508	
PID Measurement Location in Core	Number of Detections of Maximum	% of Detections of Maximum	Number of Detections of Maximum	% of Detections of Maximum
0.1 ft	27	14.8	26	14.4
0.5 ft	28	15.4	23	12.8
1.0 ft	16	8.8	18	10.0
1.5 ft	18	9.9	10	5.6
2.0 ft	8	4.4	12	6.7
2.5 ft	11	6.0	9	5.0
3.0 ft	12	6.6	17	9.4
3.5 ft	12	6.6	22	12.2
4.0 ft	14	7.7	15	8.3
4.5 ft	19	10.4	19	10.6
4.9 ft	17	9.3	9	5.0

⁴ In many soil cores with low contamination by VOCs, the PID readings were constant across the core. In those cases, the texture of the soil core was used to define the sample location. Sandy intervals were sampled preferentially.

The percentage of detection of the maximum PID response was notably higher in the upper 0.5 ft of the cores. Follow-up with the manufacturer of the PID used in the field investigation identified moisture interference on the PID lamp as a possible cause for bias. Accordingly, the distribution may indicate a potential bias in PID responses associated with moisture interference.

The effect of moisture-impacted PID response is a potential underestimation of the VOCs mass/volume for those intervals where the maximum PID measurement was in the upper 0.5 ft of the soil core. At SWMU 211-A, 86.5% of the sample locations were not impacted by moisture; at SWMU 211-B, 78.5% of the sample locations were not impacted by moisture. In general, the distribution of maximum PID response and experience of the field crew both indicate that the field PID scan correctly identified the sample interval where high VOC intervals were present deeper in the core. Moreover, the areas of soils with high VOC levels, as identified for the RDSI by the PID and verified with laboratory analysis, are consistent with historical soil analyses, as summarized in the conceptual site model of the RDSI characterization plan (in DOE 2012a).

The RDSI method of using the maximum PID response to select the sample interval intentionally biases the results high compared to random sampling or multi incremental sampling. The moisture-impacted PID response would have led to oversampling of the upper 0.5-ft interval only in those cores with little VOC content. Thus, moisture-impacted PID response would not affect significantly the standard deviation of the data set and would have little influence on the estimation of the mass/volume of VOCs at either SWMU.

In regard to determination of the extent of VOC source material, the field investigation design employed a near uniform sampling grid of both SWMUs 211-A and 211-B. Contingency borings were utilized, as provided in the RDSI characterization plan, to further delineate the extent of the area of VOC contamination based on observed results for samples collected and analyzed based on 24-hour turnaround (quick-turn). Quick-turn analytical results and corresponding plans for contingency locations were reviewed with EPA and Kentucky Division of Waste Management project personnel to obtain concurrence on planned locations and attain project objectives (i.e., determination of the extent of source based VOC mass). This approach also reduced the potential for bias related to delays associated with extended turnaround times for receipt of analytical results and less timely interaction among the FFA parties on contingency sample placement.

Observed trends and potential impacts on uncertainty and decision making were observed as follows. Results for TCE in soil at SWMU 211-A define two discrete areas where average borehole soil TCE concentrations exceed the soil cleanup goal of 75 µg/kg. Each area has unique spatial attributes. In the eastern portion of SWMU 211-A, the distribution of borings where the average borehole TCE concentration exceeds 75 µg/kg defines a north/south feature (95-ft long by 15-ft wide), whereas TCE concentrations in the western portion of the investigation area are distributed equidimensionally (70 ft in the north/south direction by 65 ft in the east/west direction). In both areas at SWMU 211-A, the RDSI data adequately define the extent of VOC concentrations in soils in the UCRS and upper RGA that exceed the identified cleanup goal.

The soil VOC data for SWMU 211-B conforms to the anticipated distribution based on the site conceptual model. The distribution of average borehole TCE concentration that exceed the cleanup goal of 75 µg/kg forms a discrete area on the south side of the C-720 Building (50-ft long by 15-ft wide). The presence of the building precluded delineation of the extent of contamination to the north. The delineation of extent is sufficient to support a decision for SWMU 211-B based on the assumption of a release at the surface on the south side of C-720.

Historical VOC results in the database were used to supplement the RDSI results and assist in the estimation of VOC mass/volume for both SWMUs 211-A and 211-B. The distribution of VOC mass/volume based on the RDSI for 211-B generally conformed to the VOC mass/volume distribution, as defined by historical VOC concentrations. The distribution of VOC mass/volume for SWMU 211-A was significantly enhanced by the inclusion of information gathered during the RDSI. The inclusion of historical VOC data reduces the potential for underestimating VOC mass/volume based on the use of RDSI results only.

The RDSI analysis of extent and mass/volume of TCE contamination, developed with input from the FFA parties, was based on kriging all sample points compared to an interpolation of the borehole-average TCE analyses (the statistical metric used to develop the remediation goals for SWMUs 211-A and 211-B). Kriging techniques can be used to describe and model spatial patterns, predict values at unmeasured locations, and assess the uncertainty associated with a predicted value at the unmeasured locations. The technique provides a “standard error” that may be used to quantify confidence levels. The RDSI data were evaluated using 50% and 90% confidence intervals, where the confidence interval indicates the probability that the predicted mass of VOC contamination in the subsurface at the SWMU, given the distribution of samples, either exceeds or is less than the estimate. The resulting mass/volume estimate for TCE, based on the 90% confidence interval, provided a more robust approach than initially envisioned and presented in the RDSI characterization plan (DOE 2012a). The method used reduces the potential for underestimating VOC mass through the use of the 90% confidence interval in combination with interpolation using individual sample results and inclusion of historical data.

The primary conclusions of the soils VOC data are (1) definition of the location and extent of contaminated soils that exceed the remediation goals identified in the ROD (DOE 2012b) for SWMUs 211-A and 211-B (e.g., 0.075 mg/kg TCE) and (2) estimation of the mass and volume of the TCE contamination. The soil VOC data generated, in combination with historical data, are sufficient and appropriate to define an upper bound for the estimate of the VOC mass and volume to support the selection of a final remedial action for VOCs at each SWMU.

4.12 THREE-DIMENSIONAL ANALYSIS

Results of the UCD soil samples from the RDSI and historical data from OREIS are inputs to three-dimensional contamination models for SWMU 211-A and SWMU 211-B using the EVS-ES software. The area historical data in OREIS come from the WAG 27 RI (DOE 1999) and the Southwest Plume SI (DOE 2007). These models estimate the extent of TCE soil impacts and the total TCE mass in soil at each SWMU.

EVS is similar to other environmental decision support software (DSS), such as SitePro and Spatial Analysis and Decision Assistance, and was evaluated by EPA and DOE in 1998 alongside five other DSS packages. EVS underwent an environmental technology verification report in March 2000 that concluded that “the main strengths of EVS-PRO are its outstanding 3-D visualization capabilities and its capability to rapidly process, analyze and visualize data” and “the demonstration showed the EVS-PRO software can be used to generate reliable and useful analyses for evaluating environmental contamination problems.”

Several interpolation techniques, including inverse distance weighting, nearest neighbor, and kriging, were evaluated, with kriging ultimately being selected as the primary interpolation technique. Kriging is a stochastic technique similar to inverse distance weighted averaging in that it uses a linear combination of weights at known points to estimate the value at the grid nodes. Kriging is named after D. L. Krige, who used kriging’s underlying theory to estimate ore content. Kriging uses a variogram (a.k.a.

semivariogram), which is a representation of the spatial and data differences between some or all possible “pairs” of points in the measured data set. The variogram then describes the weighting factors that will be applied for the interpolation.

It is acknowledged that there are significant uncertainties associated with providing a mass estimate of DNAPL using kriging. Using kriging, however, is still a useful and valid approach to estimate the extent of the source area at various isoconcentration levels below the threshold of residual saturation. Kriging also provides insight about the mass distribution at differing isoconcentration levels. Uncertainty has been considered by estimating mass at different levels of statistical confidence. By kriging data at every node of the model, an average value along with a standard deviation is calculated, thus providing a range of estimated TCE concentrations and ultimately mass. A level of significance of 0.1 (i.e., 90% confidence interval) was used in modeling the geometry and mass of TCE above 75 µg/kg in order to address uncertainty in the estimates.

Each SWMU contaminant model was based on a five-layer geologic model. Analytical results were log processed in the model. The Horizontal/Vertical Anisotropy Ratio parameter, which allows the model to take into consideration expected differences in fluid flow through the soil matrix, was set to a value of 1.5. The Octant Search method was used to determine which sample points are selected for inclusion in the kriging matrix. This method sets a maximum number of points for each octant, which helps offset bias effects of sampling distribution irregularities. The model used a soil density of 1.4 gram per cubic centimeter (g/cc) and a chemical density of 1.46 g/cc.

Model results of TCE soil impacts for SWMU 211-A and SWMU 211-B are illustrated later in this report as the 50% and 90% confidence limits of 75 µg/kg soil TCE and the 90% confidence limit of 1,000 µg/kg soil TCE. Soil TCE mass estimates for SWMUs 211-A and 211-B are reported as the 90% maximum confidence level for the source volume statistical evaluation.

Appendix B provides a CD containing viewable three-dimensional model EVS-ES files. Appendix C is the sensitivity analysis of the source volume estimate.

THIS PAGE INTENTIONALLY LEFT BLANK

5. SWMU 211-A RDSI SAMPLE RESULTS

5.1 LITHOLOGY

Soil lithology logs that provide a detailed description of soil type and HU transitions are included in Appendix D. Within the SWMU 211-A investigation area, lithology logs reveal the presence of fill material (gravelly fine sand) to a typical depth of approximately 2 ft, underlain primarily by silt with very fine sand representing the HU1 to a typical depth of approximately 20 ft bgs. HU2 was identified from approximately 20 ft bgs to approximately 35 ft bgs and consisted primarily of fine sand and silt with some gravel. HU3, primarily consisting of silt with fine sand and clay, was identified from approximately 35 ft bgs to 60 ft bgs.

5.2 SOIL SAMPLE RESULTS

Forty-two DPT soil boring locations (25 original, 18 contingency), shown in Figure 4, were performed on and extending north of the parking lot off the northeastern portion of the C 720 Building. Collected soil cores were screened approximately every 0.5 ft using a PID to identify intervals of maximum organic vapor response, if present. Soil samples were collected from the 0.5 ft interval of maximum PID reading for each 5-ft soil core and sent by courier to the fixed-base laboratory for overnight VOC analysis. The laboratory preliminary analytical results were available by 8:30 a.m. on Monday for samples collected on the previous Friday and by 8:30 a.m. Tuesday through Friday for samples collected the previous day. The next day laboratory results were used to assess actively whether additional borings were needed by comparison of the average contaminant concentration⁵ for the samples from each boring to the remediation goal. If the average exceeded the remediation goal, then one or more contingency borings were required.

A total of 541 soil samples was collected from 42 soil boring locations. Soil sample VOC results are summarized in Table 6 and presented in Appendix E. Soil sample depths ranged from 0.1 ft bgs (374.55 ft amsl) to 66.5 ft bgs (307.49 ft amsl). The maximum measured TCE result was 4,800 µg/kg from location 211-A-036 at a depth of 47.5 ft bgs (326.97 ft amsl). The observed maximum *cis*-1,2-DCE and VC results of 110 µg/kg and 28 µg/kg (both results “J” qualified indicating estimated values), respectively, also were collected at soil boring location 211-A-036, at a depth of 44.5 ft bgs (329.97 ft amsl). The maximum measured 1,1-DCE result was 4,400 µg/kg from location 211-A-004 at a depth of 40.1 ft bgs (333.18 ft amsl). Soil boring locations 211-A-004 and 211-A-036 are located in the western portion of the investigation area. *Trans*-1,2-DCE was not detected in the collected soil samples above laboratory detection limits. At 12 borings (29%), the borehole average concentration exceeded the remediation goal. A total of 97 soil samples (18%) exceeded the remediation goal. In general, the highest concentrations were noted in the 30 to 50 ft bgs depth range.

Figure 6 illustrates all of the soil TCE analyses for the SWMU 211-A investigation area, overlaid on a map. For reference, soil TCE analyses greater than 75 µg/kg (the borehole average project remediation goal) are noted by yellow highlight.

Subsequent to development of the RDWP (DOE 2012a), the approach for determining the distribution of TCE mass within the UCRS that exceeds soil TCE concentrations of 75 µg/kg was refined based on discussion among the FFA parties. The revised approach included the use of historical TCE soil data for the UCRS contained in OREIS, analytical results from the RDSI, and the use of the spatial

⁵ The average contaminant concentration for a borehole was calculated using one half of the laboratory reporting limit for nondetect analyses and using the greater concentration where analyses of duplicate samples were available.

Table 6. Soils VOC Data (Average Borehole Concentration) for SWMU 211-A

Station	Date Collected	TCE [µg/kg]	1,1-DCE [µg/kg]	<i>cis</i> -1,2- DCE [µg/kg]	<i>trans</i> -1,2- DCE [µg/kg]	VC [µg/kg]
Groundwater Protection Remediation Goal		75	137	619	5290	570
211-A-001	8/29/2012	3.4	***	***	***	***
211-A-002	8/30/2012 & 8/31/2012	161	2.5	2.0	***	***
211-A-003	9/12/2012	18*	4.1	0.5	***	***
211-A-004	8/31/2012 & 9/4/2012	552	763	9.1	***	***
211-A-005	9/4/2012	175	163	5.2	***	5.9
211-A-006	9/26/2012	8.3	7.4	0.6	***	***
211-A-008	9/20/2012	12*	6.8	0.6	***	***
211-A-009	9/20/2012	40*	4.8	0.8	***	***
211-A-010	8/16/2012, 9/13/2012 & 9/17/2012	135	3.4	2.3	***	***
211-A-011	8/17/2012	12*	6.7	0.3	***	***
211-A-012	9/17/2012	4.9	11	0.6	***	***
211-A-013	9/4/2012 & 9/5/2012	34*	45	4.4	***	2.4
211-A-014	9/5/2012	12	24*	0.8	***	***
211-A-015	9/6/2012	36*	19	0.8	***	***
211-A-016	9/27/2012	58*	14	1.7	***	***
211-A-017	9/21/2012	276	***	5.6	***	4.3
211-A-018	9/11/2012 & 9/12/2012	46*	5.8	***	***	***
211-A-019	9/12/2012	1.3	10	0.5	***	***
211-A-020	9/24/2012	297	6.7	3.7	***	***
211-A-021	9/6/2012	19	32	1.8	***	0.2
211-A-022	9/27/2012	12*	4.1	0.6	***	***
211-A-023	9/11/2012	19*	4.4	0.5	***	***
211-A-024	9/10/2012	9*	***	0.4	***	***
211-A-025	9/10/2012	213	***	13	***	***
211-A-026	9/7/2012	4.8	4.8	1.2	***	0.3
211-A-027	9/11/2012 & 9/18/2012	55*	1.6	0.7	***	***
211-A-028	9/24/2012	804	904	12	***	***
211-A-029	9/25/2012	351	348	7.0	***	***
211-A-030	9/25/2012	12*	14	1.5	***	***
211-A-031	9/26/2012	32*	***	1.1	***	***
211-A-032	9/28/2012	6.6	***	0.6	***	***


Table 6. Soils VOC Data (Average Borehole Concentration) for SWMU 211-A (Continued)

Station	Date Collected	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
Groundwater Protection Remediation Goal		75	137	619	5290	570
211-A-033	10/1/2012	166	140	7.1	***	***
211-A-035	10/2/2012	170	131*	4	***	***
211-A-036	10/3/2012	1,171	1,043	20	***	9
211-A-037	2/25/2013	0.5	***	***	***	***
211-A-038	2/25/2013	14	3.3	3.9	***	2.9
211-A-039	2/26/2013	0.6	7.3	0.57	***	***
211-A-040	2/26/2013	***	2.5	***	***	***
211-A-041	2/27/2013	21*	36*	4.3	***	1.2
211-A-042	2/27/2013	28*	20	4.2	***	0.6
211-A-043	3/4/2013	11	2.5	15	***	***
211-A-044	3/6/2013	14*	3.4	131*	***	14

Notes:

1. Groundwater Protection Remediation Goals from *Remedial Design Work Plan for Solid Waste Management Units 1, 211-A, and 211-B Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, (DOE 2012a).
2. *—Indicates average concentrations that are below the Groundwater Protection Remediation Goal, but at least one sample exceeded the remediation goal.
3. ***—Indicates average concentration not calculated as all boring analyses were “U” qualified (compound analyzed for but not detected at or below the lowest concentration reported) for specific VOC.
4. For “U” qualified analyses, a value of one half the concentration reported was used in calculating the average borehole concentration.
5. Yellow shading and bold text indicate an exceedance of Groundwater Protection Remediation Goals.
6. Soil boring 211-A-007 was not collected.
7. Soil boring 211-A-034 was collected and archived. Boring was not logged or screened for VOC impacts.

THIS PAGE INTENTIONALLY LEFT BLANK



analysis EVS-ES software to contour the 90% confidence limit of 75 µg/kg soil TCE for SWMUs 211-A and 211-B. Figure 6 shows the lateral extent of 75 µg/kg soil TCE (90% confidence limit).

In addition, Figure 6 shows the smaller areas of 75 µg/kg soil TCE (50% confidence limit) and 1,000 µg/kg soil TCE (90% confidence limit) for comparison. These depictions define the extent of TCE contamination.

Total organic carbon (TOC) results for SWMU 211-A ranged from 150 milligram/kilogram (mg/kg) to 650 mg/kg with an average concentration of 396 mg/kg. TOC sample results are presented in Table 7.

Table 7. Summary of Soils TOC Data for SWMU 211-A

Station	Date Collected	Sample Top Depth/Elevation [ft bgs/ft amsl]	Sample Bottom Depth/Elevation [ft bgs/ft amsl]	Hydrologic Unit	TOC [mg/kg]
211-A-006	9/26/2012	15.5/358.59	16/358.09	HU1	420
		20.5/353.59	20.5/353.59	HU2	650
		40.5/333.59	40.5/333.59	HU3	340
211-A-010	8/16/2012	9/365.33	9/365.33	HU1	500
		19.5/354.83	19.5/354.83	HU2	370
	9/13/2012	40/334.33	40/334.33	HU3	220
211-A-012	9/17/2012	15/360.46	16/359.46	HU1	400
		25/350.46	26/349.46	HU2	490
		37/338.46	38/337.46	HU3	410
211-A-027	9/18/2012	14/360.62	15/359.62	HU1	530
		25/349.62	25.5/349.12	HU2	270
		36.5/338.12	37/337.62	HU3	150

5.3 GROUNDWATER SAMPLE RESULTS

In the area of SWMU 211-A, RGA groundwater flows to the north and northeast. MW203 (RGA) is screened in the RGA from 71 to 76 ft bgs (298.95 to 303.95 ft amsl) and is located 16 ft upgradient of the defined area of VOC contamination at SWMU 211-A. The results of groundwater samples collected from MW203 represent ambient water quality in the area associated with the eastern half of SWMU 211-A. The prevailing hydraulic gradient in the UCRS is vertically downward, and groundwater in the UCRS is a source of recharge to the RGA. UCRS well MW204, screened from 49 to 54 ft bgs (320.44 to 325.34 ft amsl), is similarly located south (upgradient) of the defined VOC contamination in the east half of SWMU 211-A. Thus, results for MW204, similarly, represent ambient water quality for the investigation analytes. (MW204 water quality is influenced by an unidentified technetium-99 source, up to 1,240 pCi/L.) UCRS wells MW511 (screened 10 to 15 ft bgs/359.03 to 364.03 ft amsl), MW512 (screened 18 to 28 ft bgs, 346.68 to 356.68 ft amsl), and MW513 (screened 37 to 42 ft bgs, 332.20 to 337.02 ft amsl) are located within the eastern half of the area impacted by VOC contamination at SWMU 211-A, crossgradient to the areas of highest soil VOC levels. The groundwater from samples obtained from these wells reflects crossgradient impacts from VOC contamination identified with SWMU 211-A. Currently, there are no monitoring wells located in the western portion of SWMU 211-A or downgradient of SWMU 211-A.

Groundwater samples were collected during September and October 2012 from the MWs noted above: MW203 (RGA), MW204 (UCRS), MW511 (UCRS), MW512 (UCRS), and MW513 (UCRS). The groundwater samples were analyzed for VOCs, alkalinity, total and dissolved metals, ferrous iron, major anions, and dissolved gasses. Additionally, samples from MW511 and MW513 were analyzed for *Dehalococcoides mccartyi* (Dhc). Groundwater sample results are presented and are summarized in Table 8. Comparisons of the highest levels detected in the wells installed during the RDSI and the preexisting wells MW203 and MW204 follow.

VOCs. In the east half of SWMU 211-A, in the UCRS wells installed during the RDSI, contaminant levels were significantly higher in the deepest well, MW513.

	East Half of SWMU 211-A	Southeast of SWMU 211-A (Upgradient)	
	MW513 (deep UCRS well)	MW204 max value (UCRS well)	MW203 max value (RGA well)
Trichloroethene (µg/L)	220 (“D” qualified)	76	110
1,1-DCE (µg/L)	810 (“D” qualified)	17	6.7
cis-1,2-DCE (µg/L)	12	18	29

Trans-1,2-DCE and VC were not detected above individual laboratory detection limits in any of the SWMU 211-A groundwater samples. The presence of *cis*-1,2-DCE suggests that biologically mediated reductive dechlorination is occurring in the groundwater at SWMU 211-A. Groundwater VOC sample results are displayed in Figure 7.

Dissolved Gases. Among the UCRS wells installed for the RDSI at SWMU 211-A, all three dissolved gasses—ethane, ethene, and methane—are highest in the shallow well.

	East Half of SWMU 211-A	Southeast of SWMU 211-A (Upgradient)	
	MW511 (shallow UCRS well)	MW204 max value (UCRS well)	MW203 max value (RGA well)
Ethane (µg/L)	0.41	0.039	0.097
Ethene (µg/L)	0.32	0.1	0.49
Methane (µg/L)	0.86	2.6	6.8

Methane is produced by methanogenic bacteria conversion of acetate or reduction of carbon dioxide under anaerobic conditions. Methanogens and dechlorinating organisms thrive under similar conditions; therefore, the production of methane in groundwater is an indicator that conditions exist that are suitable for reductive dechlorination. Ethene is the final dechlorination product of TCE, while ethane is the product of ethene reduction. The presence of ethene/ethane provides a direct line of evidence that reductive dechlorination is proceeding to completion.

Inorganic Anions. Among the wells installed during the RDSI within the area impacted by VOC contamination in the east half of SWMU 211-A, chloride was measured at highest concentration in the deepest UCRS well, MW513, and the highest measured sulfate concentration was measured in the shallowest UCRS well, MW511. Nitrate was undetectable in both wells.

	East Half of SWMU 211-A		Southeast of SWMU 211-A (Upgradient)	
	MW511 (shallow UCRS well)	MW513 (deep UCRS well)	MW204 max value (UCRS well)	MW203 max value (RGA well)
Chloride (mg/L)	3.9	92	90	120
Nitrate (mg/L)	< 3	< 3	5.4	3.6
Sulfate (mg/L)	66	22	49	17

The nitrate and sulfate (electron acceptors) concentrations present are not at levels that would be anticipated to hinder the reductive dechlorination pathway. Additionally, sulfate is not present at an elevated concentration that has the potential to result in sulfide concentrations that are toxic to dechlorinating microorganisms.

Metals. Among the UCRS wells installed during the RDSI in the east half of SWMU 211-A, the highest measured levels of aluminum, iron, and lead were found in samples from the shallowest well, MW511; the highest levels of chromium and manganese were found in samples from the deepest well, MW513.

	East Half of SWMU 211-A		Southeast of SWMU 211-A (Upgradient)	
	MW511 (shallow UCRS well)	MW513 (deep UCRS well)	MW204 max value (UCRS well)	MW203 max value (RGA well)
Aluminum (mg/L)	1.77 ("N" qualified)	< 0.2 ("N" qualified)	0.736 ("N" qualified)	< 0.2
Chromium (mg/L)	< 0.01	0.0409	0.284	0.202
Iron (mg/L)	2.35	0.77	1.96	4.99
Lead (mg/L)	0.00275	< 0.0013	0.00308	< 0.0013
Manganese	0.204 ("N" qualified)	0.282 ("N" qualified)	0.0357	0.209 ("N" qualified)

Biological. *Dhc* was not measured at a concentration greater than the reporting limits of 43 cells/milliliter (cells/mL) in MW511 and 17 cells/mL in MW513. The absence of detectable *Dhc* suggests that reductive dechlorination is not occurring at a high rate under current conditions.

Table 8. Summary of Groundwater Metals, VOCs, and Dissolved Gases Data for SWMU 211-A

Analyte	Date Collected	MW203	MW204	MW511	MW512	MW513
Total and Dissolved Metals						
Aluminum (mg/L)	9/5/2012	0.2 U	0.64	--	--	--
	9/12/2012	0.2 U	0.659	--	--	--
	10/22/2012	0.2 UN	0.736 N	1.77 N	--	0.2 UN
Aluminum, Dissolved (mg/L)	9/5/2012	0.2 U	0.2 U	--	--	--
	9/12/2012	0.2 U	0.2 U	--	--	--
	10/22/2012	0.2 U	0.2 U	0.2 U	--	0.2 U
Chromium (mg/L)	9/5/2012	0.117	0.261	--	--	--
	9/12/2012	0.114	0.284	--	--	--
	10/22/2012	0.202	0.229	0.01 U	--	0.0409
Chromium, Dissolved (mg/L)	9/5/2012	0.01 U	0.01 U	--	--	--
	9/12/2012	0.01 U	0.01 U	--	--	--
	10/22/2012	0.01 U	0.01 U	0.01 U	--	0.01 U
Iron (mg/L)	9/5/2012	4.99	1.38	--	--	--
	9/12/2012	4.67	1.62	--	--	--
	10/22/2012	4.73	1.96	2.35	--	0.77
Iron, Dissolved (mg/L)	9/5/2012	0.275	0.326	--	--	--
	9/12/2012	0.186	0.177	--	--	--
	10/22/2012	0.404	0.325	0.115	--	0.1 U

**Table 8. Summary of Groundwater Metals, VOCs, and Dissolved Gases Data
for SWMU 211-A (Continued)**

Analyte	Date Collected	MW203	MW204	MW511	MW512	MW513
Lead (mg/L)	9/5/2012	0.0013 U	0.0013 U	--	--	--
	9/12/2012	0.0013 U	0.00162	--	--	--
	10/22/2012	0.0013 U	0.00308	0.00275	--	0.0013 U
Lead, Dissolved (mg/L)	9/5/2012	0.0013 UB	0.0013 UB	--	--	--
	9/12/2012	0.0013 UB	0.0013 UB	--	--	--
	10/22/2012	0.0013 U	0.0013 U	0.0013 U	--	0.0013 U
Manganese (mg/L)	9/5/2012	0.168	0.0221	--	--	--
	9/12/2012	0.151	0.0357	--	--	--
	10/22/2012	0.209 N	0.0341 N	0.204 N	--	0.282 N
Manganese, Dissolved (mg/L)	9/5/2012	0.162	0.0228	--	--	--
	9/12/2012	0.11	0.0175	--	--	--
	10/22/2012	0.181 X	0.0249 X	0.203 X	--	0.248 X
Volatile Organic Compounds						
Trichloroethene (µg/L)	9/5/2012	72 JY	56 DJY	--	--	--
	9/12/2012	83	61	--	--	--
	10/22/2012	110	76	10	--	220 D
	10/23/2012	--	--	--	34	--
1,1-Dichloroethene (µg/L)	9/5/2012	6.1	15 D	--	--	--
	9/12/2012	6.5	17	--	--	--
	10/22/2012	6.7	16	5 U	--	810 D
	10/23/2012	--	--	--	5 U	--
<i>cis</i> -1,2-Dichloroethene (µg/L)	9/5/2012	28	17 D	--	--	--
	9/12/2012	29	17	--	--	--
	10/22/2012	27	18	2.6	--	12 D
	10/23/2012	--	--	--	1.2	--
<i>trans</i> -1,2-Dichloroethene (µg/L)	9/5/2012	1 U	2 U	--	--	--
	9/12/2012	1 U	1 U	--	--	--
	10/22/2012	1 U	1 U	1 U	--	10 U
	10/23/2012	--	--	--	1 U	--
Vinyl chloride (µg/L)	9/5/2012	2 U	4 U	--	--	--
	9/12/2012	2 U	2 U	--	--	--
	10/22/2012	2 U	2 U	2 U	--	20 U
	10/23/2012	--	--	--	2 U	--
Biological						
<i>Dehalococcoides ethenogenes</i> (cells/mL)	10/22/2012	--	--	43 U	--	17 U
Dissolved Gases						
Ethane (µg/L)	9/5/2012	0.097	0.039	--	--	--
	9/18/2012	0.02 J	0.022 J	--	--	--
	10/22/2012	0.0076 J	0.012 J	0.41	--	0.33
	10/23/2012	--	--	--	0.03	--

**Table 8. Summary of Groundwater Metals, VOCs, and Dissolved Gases Data
for SWMU 211-A (Continued)**

Analyte	Date Collected	MW203	MW204	MW511	MW512	MW513
Ethene (µg/L)	9/5/2012	0.49	0.1	--	--	--
	9/18/2012	0.034	0.031	--	--	--
	10/22/2012	0.026	0.02 J	0.32	--	0.12
	10/23/2012	--	--	--	0.01 J	--
Methane (µg/L)	9/5/2012	6.8	2.6	--	--	--
	9/18/2012	0.31	0.47	--	--	--
	10/22/2012	0.23	0.16	0.86	--	1.3
	10/23/2012	--	--	--	0.48	--
Inorganic Anions						
Chloride (mg/L)	9/5/2012	120	88	--	--	--
	9/12/2012	120	87	--	--	--
	10/22/2012	110	90	3.9	--	92
Nitrate (mg/L)	9/5/2012	3.6	5.4	--	--	--
	9/12/2012	3.4	5.1	--	--	--
	10/22/2012	3.1	5.4	3 U	--	3 U
Sulfate (mg/L)	9/5/2012	15	49	--	--	--
	9/12/2012	15	47	--	--	--
	10/22/2012	17	48	66	--	22

Notes:

1. B—Applies when the analyte is found in the associated blank.
2. D—Compounds identified in an analysis at a secondary dilution filter.
3. J—Indicates an estimated value.
4. N—Sample spike recovery not within control limits.
5. U (inorganics and organics)—Analyte result is less than the reporting limit.
6. X—Other specific flags and footnotes may be required to properly define results. For the dissolved manganese analyses, the serial dilution test difference exceeded the quality control limit of 10%.
7. Y—Matrix spike, matrix spike duplicate and/or relative percent difference failed acceptance criteria.
8. “--”--signifies sample was not collected.
9. The high reporting limits for MW513 for *trans*-1,2- DCE and VC are due to a 10× dilution of the sample.

THIS PAGE INTENTIONALLY LEFT BLANK

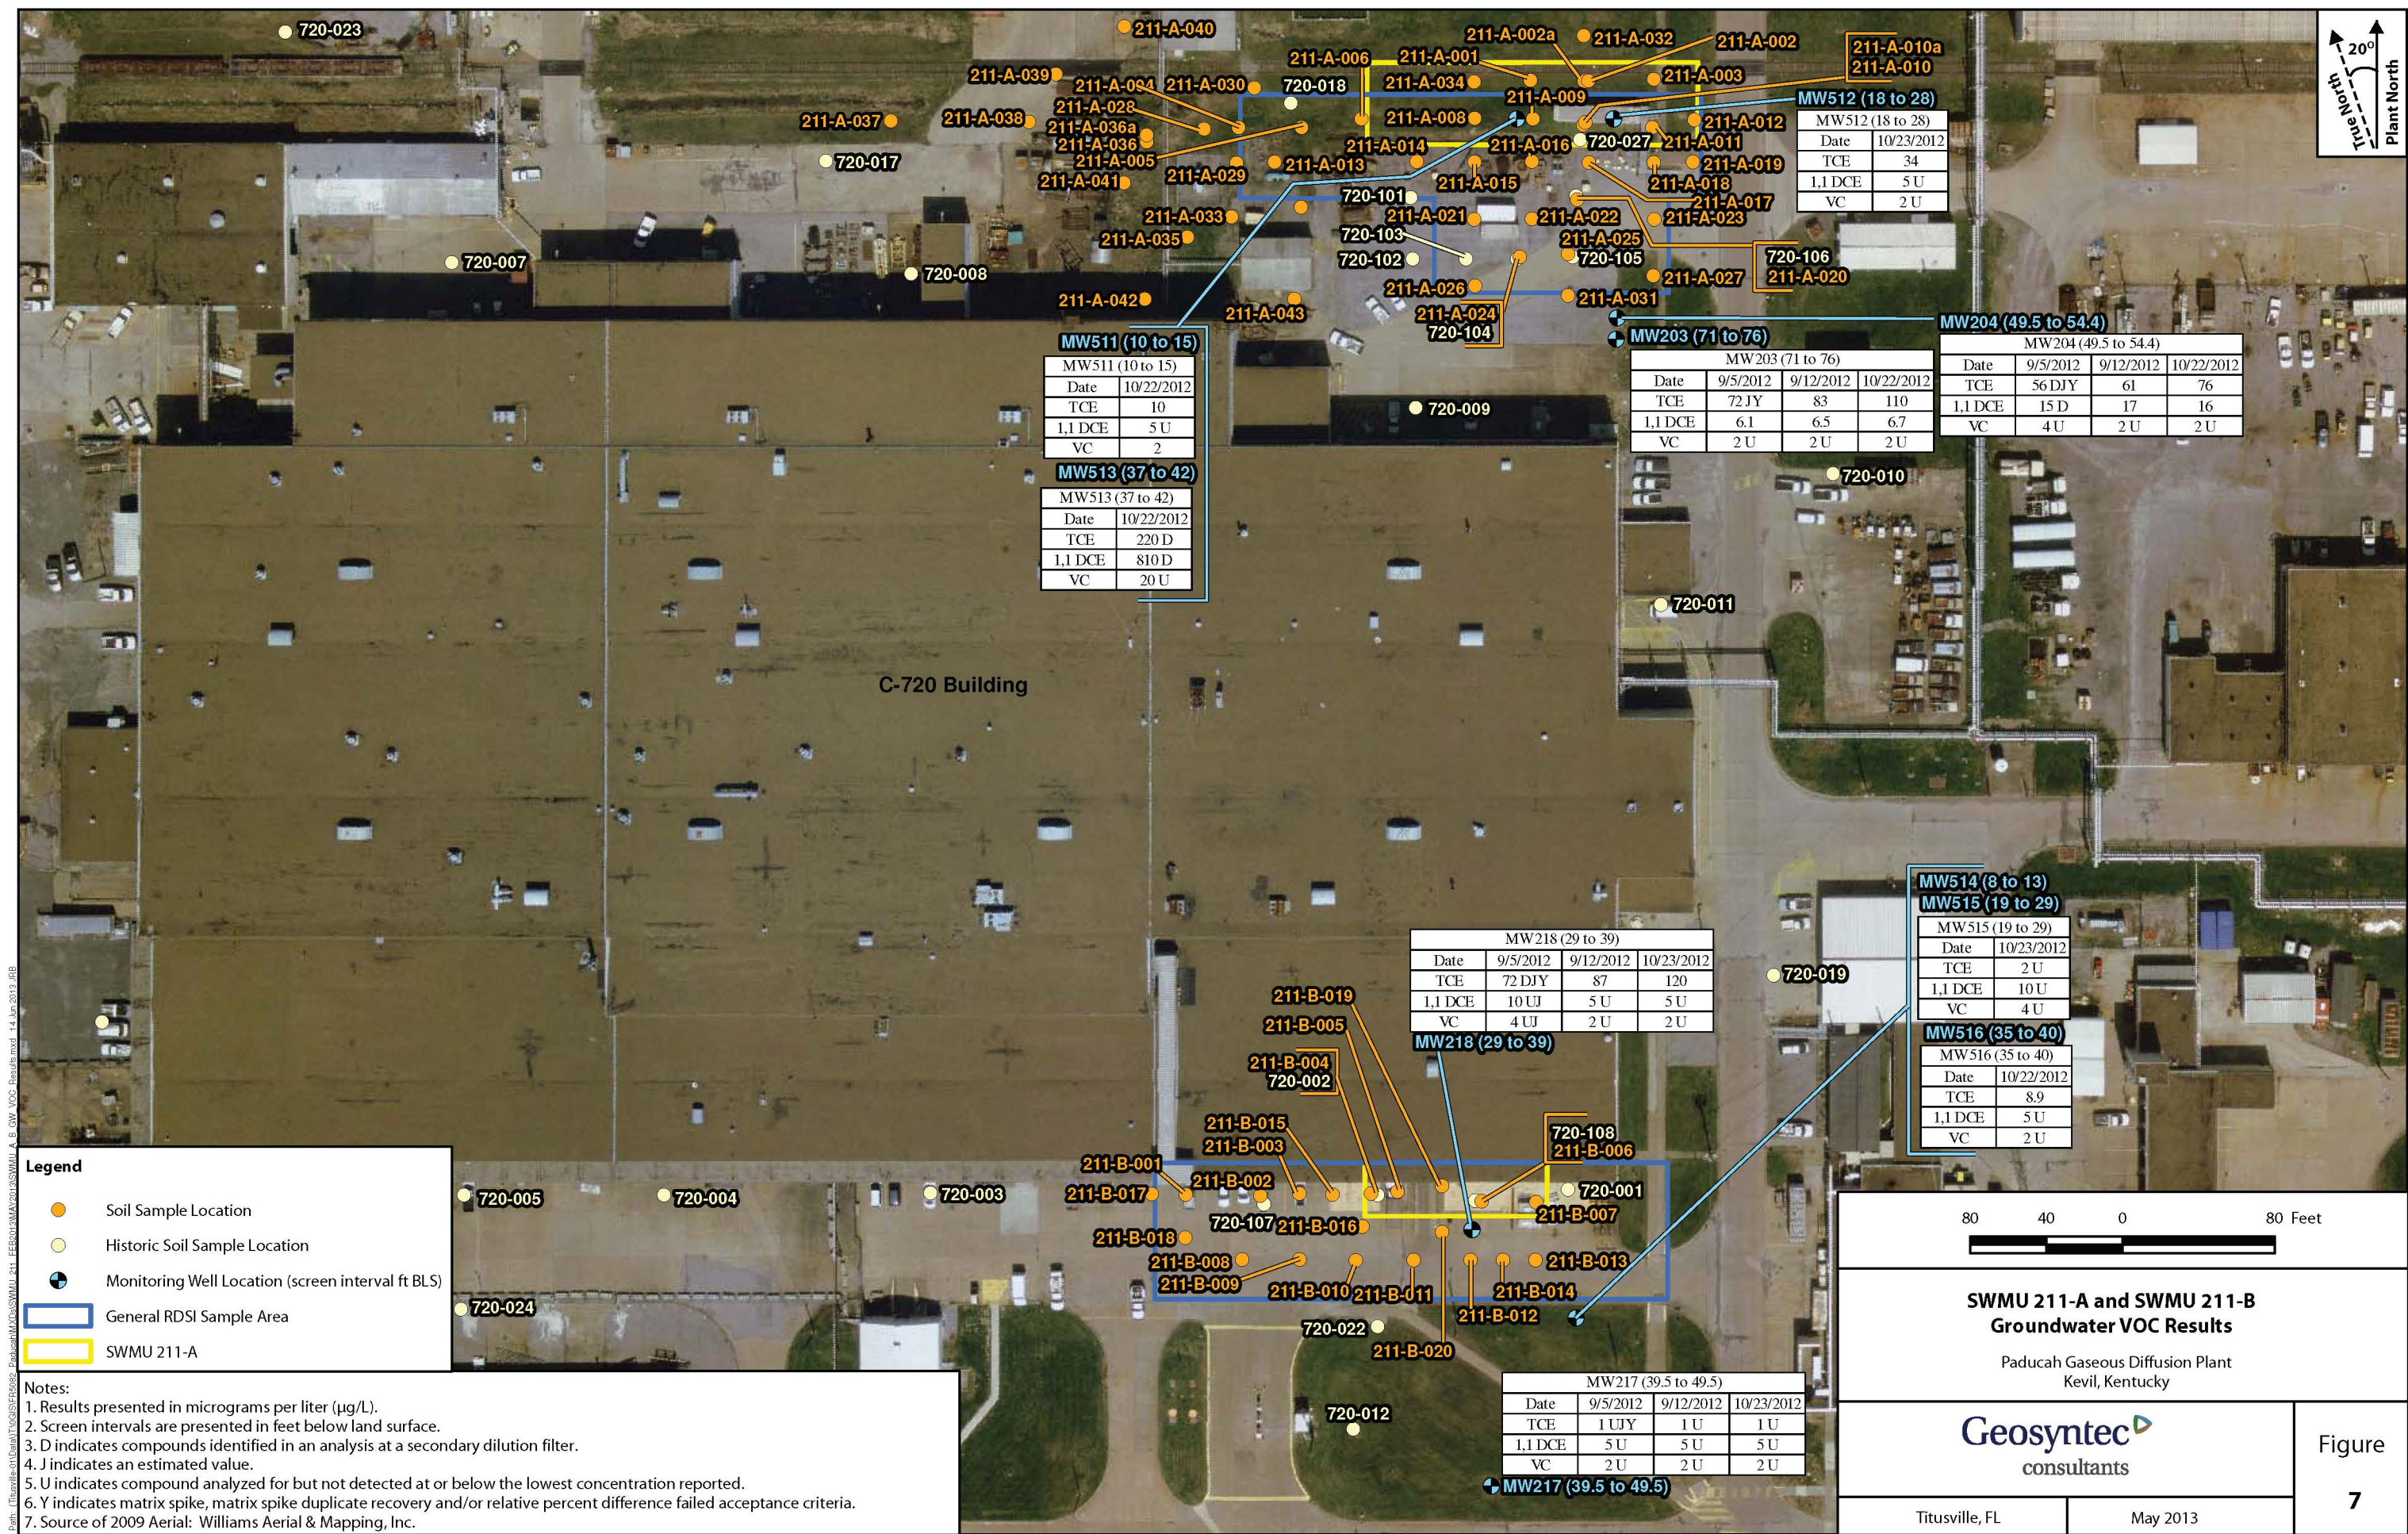


Figure 7. SWMU 211-A and SWMU 211-B Groundwater VOC Data

THIS PAGE INTENTIONALLY LEFT BLANK

5.4 SWMU 211-A HU HYDROLOGIC ANALYSIS

Both field and laboratory evaluations were performed to assess the ability of the HU1, HU2, and HU3 formations to accept injectate (Appendix F) and to predict the likely injection pressures and flow rates that may be encountered during field implementation of an injection remedy. Table 9 presents the results of the flexible wall permeameter tests and injection tests. One of the geotechnical laboratory tests estimated hydraulic conductivity by use of a flexible wall permeameter test (ASTM D5084-10) performed at nine locations:

- 211-A-012 (10-12 ft bgs/363.46 to 365.46 ft amsl), 211-A-012 (23-25 ft bgs/350.46 to 352.46 ft amsl), 211-A-012 (38-40 ft bgs/335.46 to 337.46 ft amsl)
- 211-A-027 (10-12 ft bgs/362.62 to 364.62 ft amsl), 211-A-027 (22.5-24.5 ft bgs/350.12 to 352.12 ft amsl), 211-A-027 (38-40 ft bgs/334.62 to 336.62 ft amsl)
- MW513 (10-12 ft bgs/362.02 to 364.02 ft amsl), MW513 (20-21 ft bgs/353.02 to 354.02 ft amsl), MW513 (40-42 ft bgs/332.02 to 334.02 ft amsl)

The calculated average hydraulic conductivity values ranged from 5.5E-10 cm/s to 3.8E-7 cm/s.

Injection test results provided estimates of the likely injection pressures and flow rates during performance of an injection-based remedy. MW511, MW512, and MW513 were tested at pressures of 25, 50, 75, and 100 pounds per square inch (psi) while the flow rate was recorded. The injection flow rates and pressures were used as inputs to calculate hydraulic conductivity by the Jacob-Lohman Method, as provided by the U.S. Geological Survey (USGS 2002). The Jacob-Lohman method calculated hydraulic conductivity values ranged from 4.2E-6 cm/s to 8.8E-5 cm/s. Based upon field observations injection pressures in excess of 50 psi and a flow rate greater than 2 gallons per minute (gpm) are not advisable. Pressures greater than 50 psi tended to raise the immediate groundwater level to the ground surface, signifying that the aquifer is over pressurized and will not provide optimum horizontal distribution within the target HU.

Table 9. Summary of Hydrologic Unit Hydraulic Conductivities for SWMU 211-A

Permeameter Test Result Summary			
Boring Location	Hydrologic Unit	Sample Depth/Elevation Interval (ft bgs/ft/amsl)	Average Vertical Hydraulic Conductivity (cm/s)
211-A-012	HU1	10-12/363.46-365.46	1.2E-08
211-A-012	HU2	23-25/350.46-352.46	3.5E-09
211-A-012	HU3	38-40/335.46-337.46	3.8E-09
211-A-027	HU1	10-12/362.62-364.62	2.0E-08
211-A-027	HU2	22.5-24.5/350.12-352.12	3.9E-09
211-A-027	HU3	38-40/334.62-336.62	4.8E-09
MW513	HU1	10-12/362.02-364.02	3.8E-07
MW513	HU2	20-21/353.02-354.02	5.5E-10
MW513	HU3	40-42/332.02-334.02	1.8E-07

Table 9. Summary of Hydrologic Unit Hydraulic Conductivities for SWMU 211-A (Continued)

Injection Test Result Summary				
Monitoring Well	Hydrologic Unit	Injection Pressure (psi)	Average Flow Rate (gpm)	Calculated Horizontal Hydraulic Conductivity (cm/s)
MW511	HU1	25	2.3	8.8E-05
MW511	HU1	50	3.1	4.2E-05
MW511	HU1	75	3.9	2.6E-05
MW511	HU1	100	4.8	1.9E-05
MW512	HU2	25	2.0	2.9E-05
MW512	HU2	50	3.3	1.5E-05
MW512	HU2	75	4.1	9.9E-06
MW512	HU2	100	4.7	7.4E-06
MW513	HU3	25	0.9	1.3E-05
MW513	HU3	50	2.0	6.4E-06
MW513	HU3	75	3.0	4.2E-06

A laboratory evaluation of soil samples was performed to obtain soil grain size distribution (GSD) information (see Appendix F). GSD analyses (ASTM D422) were performed at the following locations:

- 211-A-006 (12-15.5 ft bgs/358.59-362.09 ft amsl), 211-A-006 (21.3-25 ft bgs/349.09-352.79 ft amsl), 211-A-006 (40-42.5 ft bgs/331.59-334.09 ft amsl)
- 211-A-002 (9-13 ft bgs/361.50-365.50 ft amsl), 211-A-002 (23-26 ft bgs/348.50-351.50 ft amsl), 211-A-002 (37.4-39 ft bgs/335.50-337.10 ft amsl)
- 211-A-012 (12-15 ft bgs/360.46-363.46 ft amsl), 211-A-012 (20-23 ft bgs/352.46-355.46 ft amsl), 211-A-012 (40-42 ft bgs/333.46-335.46 ft amsl)
- 211-A-027 (12-15 ft bgs/359.62-362.62 ft amsl), 211-A-027 (22-25 ft bgs/349.62-352.62 ft amsl), 211-A-027 (35.5-37 ft bgs/337.62-339.12 ft amsl)

Overall, the GSD results indicate that injection technologies would be expected to be successful (though limited in rate/pressure due to grain size) at SWMU 211-A.

6. SWMU 211-B RDSI SAMPLE RESULTS

6.1 LITHOLOGY

Soil lithology logs that provide a detailed description of soil type and HU transitions are included in Appendix D. Within the SWMU 211-B investigation area, lithology logs reveal the presence of fill material (gravelly fine sand) to a typical depth of approximately 2 ft, underlain primarily by silt with very fine sand representing HU1 to a typical depth of approximately 20 ft bgs. HU2 was identified from approximately 20 ft bgs to approximately 35 ft bgs and consisted primarily of fine sand and silt with some gravel. HU3 was identified from approximately 35 ft bgs to 60 ft bgs and consisted primarily of silt with fine sand and clay.

6.2 SOIL SAMPLING RESULTS

Nineteen DPT soil boring locations (17 original and 2 contingency) (Figure 5) were performed on the parking lot south of the southeastern portion of the C-720 Building. Collected soil samples were screened approximately every 0.5 ft using a PID to identify intervals of maximum organic vapor response, if present. Soil samples were collected from the 0.5 ft interval of maximum PID reading for each 5-ft soil core and sent by courier to the fixed-base laboratory for overnight VOC analysis. The laboratory preliminary analytical results were available by 8:30 a.m. on Monday for samples collected on the previous Friday and by 8:30 a.m. Tuesday through Friday for samples collected the previous day. The next day laboratory results were used to actively assess whether additional borings were needed based upon a comparison to the RDWP (DOE 2012a) remediation goals. As a result, two contingency borings were completed.

A total of 256 soil samples were collected from 19 soil boring locations. The soil sample VOC results are summarized in Table 10 and presented in Appendix G. Soil sample depths ranged from 0.5 ft bgs (370.07 ft amsl) to 64.9 ft bgs (306.42 ft amsl). The maximum measured TCE result was 13,000 µg/kg from location 211-B-019 at a depth of 25.1 ft bgs (346.90 ft amsl). The observed maximum *cis*-1,2-DCE result was 66 µg/kg (“J” qualified) collected at soil boring location 211-B-004, at a depth of 14.5 ft bgs (357.44 ft amsl). Soil boring locations 211-B-019 and 211-B-004 are located centrally in the investigation area and within 35 ft of historical location 720-002 (location with greatest TCE concentrations from the Southwest Plume SI). 1,1-DCE, *trans*-1,2-DCE, and VC were not detected in the collected soil samples above laboratory detection limits. At four borings (21%), the borehole average concentration⁶ exceeded the remediation goal. A total of 40 soil samples (16%) exceeded the remediation goal. In general, the highest concentrations were noted in the 15 to 30 ft bgs depth range. The area with remediation goal exceedances is immediately adjacent to the southern limit of the eastern portion of the C-720 Building.

Figure 8 illustrates all of the soil TCE analyses for the SWMU 211-B investigation area, overlaid on a map. For reference, soil TCE analyses greater than 75 µg/kg (the borehole average project remediation goal) are noted by yellow highlight. As discussed in Section 5.2, Figure 8 shows the lateral extent of 75 µg/kg soil TCE (90% confidence limit) and the smaller areas of 75 µg/kg soil TCE (50% confidence limit) and 1,000 µg/kg soil TCE (90% confidence limit) for comparison.


⁶ The average contaminant concentration for a borehole was calculated using one half of the laboratory reporting limit for nondetect analyses and using the greater concentration where analyses of duplicate samples were available.

Table 10. Soils VOC Data (Average Borehole Concentration) for SWMU 211-B

Station	Date Collected	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2- DCE [µg/kg]	trans-1,2- DCE [µg/kg]	VC [µg/kg]
Groundwater Protection Remediation Goal		75	137	619	5290	570
211-B-001	10/9/2012	197	***	1	***	***
211-B-002	10/10/2012	43*	***	***	***	***
211-B-003	10/10/2012	10	***	***	***	***
211-B-004	10/11/2012	418	***	10	***	***
211-B-005	10/15/2012	863	***	6	***	***
211-B-006	10/15/2012	15*	***	***	***	***
211-B-007	10/16/2012	4	***	***	***	***
211-B-008	10/9/2012	0.6	***	***	***	***
211-B-009	10/8/2012	2	***	0.3	***	***
211-B-010	10/5/2012	3	***	0.3	***	***
211-B-011	10/8/2012	5	***	***	***	***
211-B-012	10/4/2012	1.0	***	***	***	***
211-B-013	10/4/2012	0.3	***	***	***	***
211-B-015	10/16/2012	39*	***	2	***	***
211-B-016	10/17/2012	15	***	0.4	***	***
211-B-017	10/17/2012	25*	***	0.6	***	***
211-B-018	10/18/2012	4	***	***	***	***
211-B-019	10/18/2012	1,178	***	4	***	***
211-B-020	10/19/2012	11	***	***	***	***

Notes:

1. Groundwater Protection Remediation Goals from *Remedial Design Work Plan for Solid Waste Management Units 1, 211-A, and 211-B Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky* (DOE 2012a).
2. *—Indicates average concentrations that are below the Groundwater Protection Remediation Goal, but at least one sample exceeded the remediation goal.
3. ***—Indicates average concentration not calculated as all boring analyses were “U” qualified (compound analyzed for but not detected at or below the lowest concentration reported) for specific VOC.
4. For “U” qualified analyses, a value of one half the concentration reported was used in calculating the average borehole concentration.
5. Yellow shading and bold text indicate an exceedance of Groundwater Protection Remediation Goals.
6. Soil boring 211-B-014 was collected and archived. Boring was not logged or screened for VOC impacts.

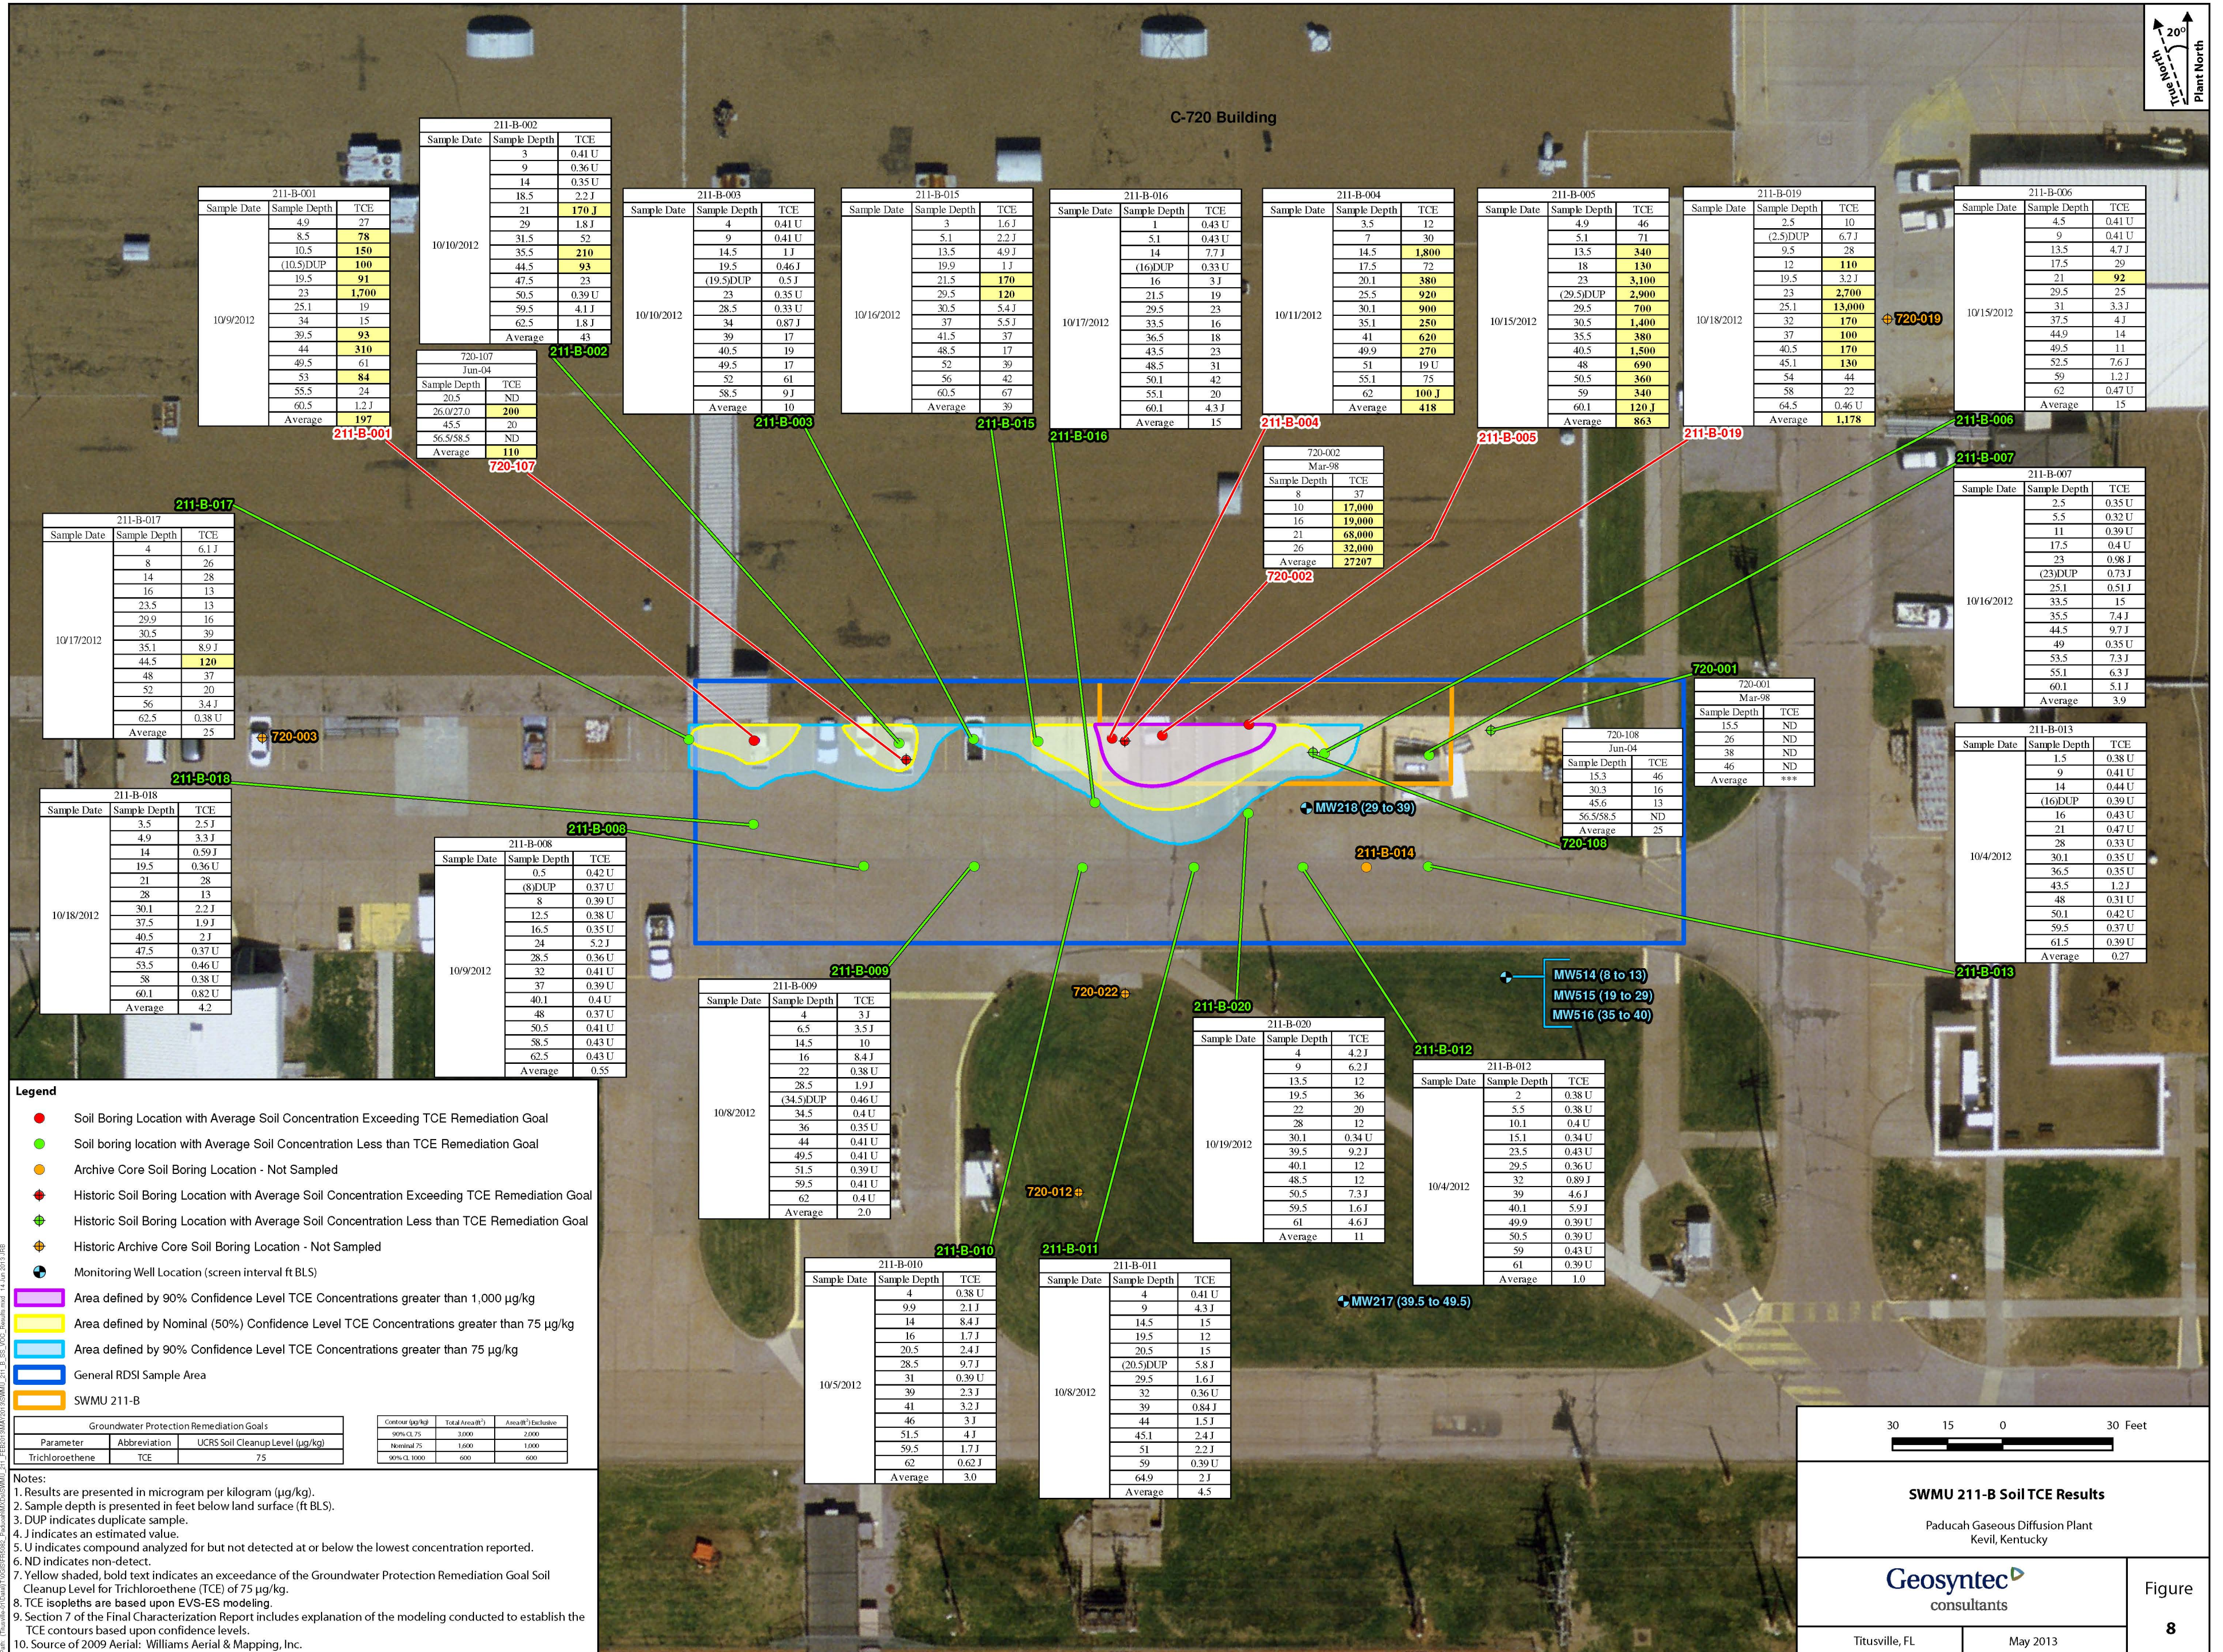

TOC results for SWMU 211-B ranged from lower than the reporting limit of 33 mg/kg to 670 mg/kg with an average concentration of 500 mg/kg. TOC sample results are presented in Table 11.

Table 11. Summary of Soils TOC Data for SWMU 211-B

Station	Date Collected	Sample Top Depth/Elevation [ft bgs/ft amsl]	Sample Bottom Depth/Elevation [ft bgs/ft amsl]	Hydrogeologic Unit	TOC [mg/kg]
211-B-001	10/9/2012	9.5/362.42	9.5/362.42	HU1	430
		18.5/353.42	18.5/353.42	HU2	460
		39/332.92	39/332.92	HU3	380
211-B-004	10/11/2012	5.5/366.44	5.5/366.44	HU1	620
		22.3/349.64	22.3/349.64	HU2	33 U
		38/333.94	38/333.94	HU3	450
211-B-007	10/16/2012	9/363.03	9/363.03	HU1	670
		27.5/344.53	27.5/344.53	HU2	240
		43/329.03	43/329.03	HU3	750

6.3 GROUNDWATER SAMPLE RESULTS

As at SWMU 211-A, RGA groundwater flows to the north and northeast in the area of SWMU 211-B. Because of the proximity of the Porters Creek Clay Terrace, there are no RGA MWs present in the vicinity of SWMU 211-B to characterize groundwater quality. The prevailing hydraulic gradient in the UCRS is vertically downward and groundwater flows downward to recharge the RGA. UCRS wells MW217 (distal), screened from 40 to 50 ft bgs/325.96 to 335.96 ft amsl, and MW218 (proximal), with screen at 29 to 39 ft bgs/333.30 to 343.30 ft amsl, are located 130 ft and 8 ft south (upgradient) of SWMU 211-B, respectively, and provide ambient groundwater quality characterization for the investigation. UCRS wells MW514 (screened 8 to 13 ft bgs/359.73 to 364.73 ft amsl), MW515 (screened 19 to 29 ft bgs/343.75 to 353.75 ft amsl), and MW516 (screened 35 to 40 ft bgs/332.77 to 337.77 ft amsl) were installed southeast (upgradient) of the area of VOC contamination as part of the RDSI to provide further characterization for SWMU 211-B. (Continued use of the SWMU 211-B area precluded installation of MWs in the VOC contaminated area.) There are no UCRS or RGA downgradient monitoring wells for SWMU 211-B.

Groundwater samples were collected during September and October 2012 from UCRS MWs MW217, MW218, MW515, and MW516. MW514 (shallowest UCRS well) had insufficient water to support groundwater sampling. The groundwater samples were collected and analyzed for VOCs, alkalinity, total and dissolved metals, ferrous iron, major anions, and dissolved gasses. Additionally, samples from MW515 and MW516 were analyzed for *Dhc*. Groundwater sample results are presented in Table 12. Comparisons of the highest levels detected in the wells installed during the RDSI and the levels observed in pre-existing wells MW217 and MW218 follow.

VOCs. In the RDSI wells installed for SWMU 211-B, the only detection of a VOC was in the deepest well, MW516.

SWMU 211-B RDSI Well		South of SWMU 211-B	
	MW516 (deep UCRS well)	MW217 max value (distal UCRS well)	MW218 max value (proximal UCRS well)
Trichloroethene (µg/L)	8.9	< 1	120
<i>cis</i> -1,2-DCE (µg/L)	< 1	< 1	2.2

1,1-DCE; *trans*-1,2-DCE; and VC were not detected above individual laboratory detection limits in any of the SWMU 211-B groundwater samples. The presence of *cis*-1,2-DCE suggests that biologically mediated reductive dechlorination is occurring in the groundwater at SWMU 211-B. Groundwater VOC sample results are displayed in Figure 7.

Dissolved Gases. Among the wells installed during the RDSI at SWMU 211-B, all three dissolved gasses—ethane, ethene, and methane—are highest in the shallower well with water.

SWMU 211-B RDSI Well		South of SWMU 211-B	
	MW515 (shallower UCRS well)	MW217 max value (distal UCRS well)	MW218 max value (proximal UCRS well)
Ethane (µg/L)	25	0.11	0.18
Ethene (µg/L)	7.9	0.14	0.24
Methane (µg/L)	35	6.5	2.4

Methane is produced by methanogenic bacteria conversion of acetate or reduction of carbon dioxide under anaerobic conditions. Methanogens and dechlorinating organisms thrive under similar conditions; therefore, the production of methane in groundwater is an indicator that conditions exist that are suitable for reductive dechlorination. Ethene is the final dechlorination product of TCE, while ethane is the product of ethene reduction. The presence of ethene/ethane provides a direct line of evidence that reductive dechlorination is proceeding to completion.

Inorganic Anions. Within the SWMU 211-B RDSI UCRS wells, chloride and nitrate levels were measured at highest concentration in the deepest well, MW516, and the highest sulfate concentration was measured in the shallower well, MW515.

	SWMU 211-B RDSI Wells		South of SWMU 211-B	
	MW515 (shallower UCRS well)	MW516 (deepest UCRS well)	MW217 max value (distal UCRS well)	MW218 max value (proximal UCRS well)
Chloride (mg/L)	160	300	160	340
Nitrate (mg/L)	< 3	3	< 3	< 3
Sulfate (mg/L)	22	6.4	39	40

The nitrate and sulfate (electron acceptors) concentrations present are not at levels that would be anticipated to hinder the reductive dechlorination pathway. Additionally, sulfate is not present at an elevated concentration that has the potential to result in sulfide concentrations that are toxic to dechlorinating microorganisms.

Metals. Among the UCRS SWMU 211-B RDSI wells, the highest measured levels of metals, with the exception of chromium, were found in samples from the shallower UCRS well, MW515.

	SWMU 211-B RDSI Wells		South of SWMU 211-B	
	MW515 (shallower UCRS well)	MW516 (deepest UCRS well)	MW217 max value (distal UCRS well)	MW218 max value (proximal UCRS well)
Aluminum (mg/L)	8.49 ("N" qualified)	0.202 ("N" qualified)	0.647	4.61 ("N" qualified)
Chromium (mg/L)	0.0137	0.131	< 0.01	< 0.01
Iron (mg/L)	9.79	0.605	0.354	0.515
Lead (mg/L)	0.0106	< 0.0013	0.00262	0.00241
Manganese	0.32 ("N" qualified)	0.108 ("N" qualified)	1.43	0.0356 ("N" qualified)

Biological. *Dhc* was not measured at a concentration greater than the reporting limits of 35 cells/mL for MW515 and 25 cells/mL in MW516. The absence of detectable *Dhc* suggests that reductive dechlorination is not occurring at a high rate under current conditions.

Table 12. Summary of Groundwater Metals, VOCs, and Dissolved Gases Data for SWMU 211-B

Analyte	Date Collected	MW217	MW218	MW515	MW516
Total and Dissolved Metals					
Aluminum (mg/L)	9/5/2012	0.647	4.48	--	--
	9/12/2012	0.2 U	2.46	--	--
	10/22/2012	--	--	--	0.202 N
	10/23/2012	0.237 N	4.61 N	8.49 N	--
Aluminum, Dissolved (mg/L)	9/5/2012	0.2 U	0.2 U	--	--
	9/12/2012	0.2 U	0.2 U	--	--
	10/22/2012	--	--	--	0.2 U
	10/23/2012	0.2 U	0.2 U	0.281	--
Chromium (mg/L)	9/5/2012	0.01 U	0.01 U	--	--
	9/12/2012	0.01 U	0.01 U	--	--
	10/22/2012	--	--	--	0.131
	10/23/2012	0.01 U	0.01 U	0.0137	--
Chromium, Dissolved (mg/L)	9/5/2012	0.01 U	0.01 U	--	--
	9/12/2012	0.01 U	0.01 U	--	--
	10/22/2012	--	--	--	0.01 U
	10/23/2012	0.01 U	0.01 U	0.01 U	--
Iron (mg/L)	9/5/2012	0.354	0.437	--	--
	9/12/2012	0.1 U	0.462	--	--
	10/22/2012	--	--	--	0.605
	10/23/2012	0.153	0.515	9.79	--
Iron, Dissolved (mg/L)	9/5/2012	0.1 U	0.1 U	--	--
	9/12/2012	0.1 U	0.1 U	--	--
	10/22/2012	--	--	--	0.1 U
	10/23/2012	0.1 U	0.1 U	0.139	--
Lead (mg/L)	9/5/2012	0.00262	0.00241	--	--
	9/12/2012	0.0013 U	0.00213	--	--
	10/22/2012	--	--	--	0.0013 U
	10/23/2012	0.0013 U	0.00233	0.0106	--
Lead, Dissolved (mg/L)	9/5/2012	0.0013 UB	0.0013 UB	--	--
	9/12/2012	0.0013 UB	0.0013 UB	--	--
	10/22/2012	--	--	--	0.0013 U
	10/23/2012	0.0013 U	0.0013 U	0.0013 U	--

**Table 12. Summary of Groundwater Metals, VOCs, and Dissolved Gases Data
for SWMU 211-B (Continued)**

Analyte	Date Collected	MW217	MW218	MW515	MW516
Volatile Organic Compounds					
Manganese (mg/L)	9/5/2012	1.43	0.0204	--	--
	9/12/2012	0.806	0.0167	--	--
	10/22/2012	--	--	--	0.108 N
	10/23/2012	0.826 N	0.0356 N	0.32 N	--
Manganese, Dissolved (mg/L)	9/5/2012	0.404	0.005 U	--	--
	9/12/2012	0.605	0.005 U	--	--
	10/22/2012	--	--	--	0.127 X
	10/23/2012	0.746 X	0.00664 X	0.17 X	--
Trichloroethene (µg/L)	9/5/2012	1 UJY	72 DJY	--	--
	9/12/2012	1 U	87	--	--
	10/22/2012	--	--	--	8.9
	10/23/2012	1 U	120	2 U	--
1,1-Dichloroethene (µg/L)	9/5/2012	5 U	10 UJ	--	--
	9/12/2012	5 U	5 U	--	--
	10/22/2012	--	--	--	5 U
	10/23/2012	5 U	5 U	10 U	--
<i>cis</i> -1,2-Dichloroethene (µg/L)	9/5/2012	1 U	2.1 DJ	--	--
	9/12/2012	1 U	2.2	--	--
	10/22/2012	--	--	--	1 U
	10/23/2012	1 U	2.1	2 U	--
<i>trans</i> -1,2-Dichloroethene (µg/L)	9/5/2012	1 U	2 UJ	--	--
	9/12/2012	1 U	1 U	--	--
	10/22/2012	--	--	--	1 U
	10/23/2012	1 U	1 U	2 U	--
Vinyl chloride (µg/L)	9/5/2012	2 U	4 UJ	--	--
	9/12/2012	2 U	2 U	--	--
	10/22/2012	--	--	--	2 U
	10/23/2012	2 U	2 U	4 U	--
Biological					
<i>Dehalococcoides enethenogenes</i> (cells/mL)	10/22/2012	--	--	--	25 U
	10/23/2012	--	--	35 U	--
Dissolved Gases					
Ethane (µg/L)	9/5/2012	0.11	0.18	--	--
	9/18/2012	0.024 J	0.013 J	--	--
	10/22/2012	--	--	--	0.013 J
	10/23/2012	0.015 J	0.025 U	25	--
Ethene (µg/L)	9/5/2012	0.14	0.24	--	--
	9/18/2012	0.039	0.021 J	--	--
	10/22/2012	--	--	--	0.023 J
	10/23/2012	0.0093 J	0.027	7.9	--

**Table 12. Summary of Groundwater Metals, VOCs, and Dissolved Gases Data
for SWMU 211-B (Continued)**

Analyte	Date Collected	MW217	MW218	MW515	MW516
Inorganic Anions					
Methane (µg/L)	9/5/2012	6.5	2.4	--	--
	9/18/2012	0.75	0.18	--	--
	10/22/2012	--	--	--	0.52
	10/23/2012	0.52	0.056 J	35	--
Chloride (mg/L)	9/5/2012	160	340	--	--
	9/12/2012	160	330	--	--
	10/22/2012	--	--	--	300
	10/23/2012	150	340	160	--
Nitrate (mg/L)	9/5/2012	3 U	3 U	--	--
	9/12/2012	3 U	3 U	--	--
	10/22/2012	--	--	--	3
	10/23/2012	3 U	3 U	3 U	--
Sulfate (mg/L)	9/5/2012	5.6	39	--	--
	9/12/2012	4.8	39	--	--
	10/22/2012	--	--	--	6.4
	10/23/2012	39	40	22	--

Notes:

1. B—Applies when the analyte is found in the associated blank.
2. D—Compounds identified in an analysis at a secondary dilution filter.
3. J—Indicates an estimated value.
4. N—Sample spike recovery not within control limits.
5. U (inorganics and organics)—Analyte result is less than the reporting limit.
6. X—Other specific flags and footnotes may be required to properly define results. For the dissolved manganese analyses, the serial dilution test difference exceeded the quality control limit of 10%.
7. Y—Matrix spike, matrix spike duplicate and/or relative percent difference failed acceptance criteria.
8. "---" signifies sample was not collected.

6.4 SWMU 211-B HU HYDROLOGIC ANALYSIS

Both field and laboratory evaluations were performed to assess the ability of the HU1, HU2, and HU3 formations to accept injectate (Appendix F) and to predict the likely injection pressures and flow rates that may be encountered during field implementation of an injection remedy. Table 13 presents the results of the flexible wall permeameter tests and injection tests. One of the geotechnical laboratory tests estimated hydraulic conductivity by use of a flexible wall permeameter test (ASTM D5084) performed at nine locations:

- 211-B-001 (5-7 ft bgs/364.92-366.92 ft amsl), 211-B-001 (15-17 ft bgs/354.92-356.92 ft amsl), 211-B-001 (32-37 ft bgs/334.92-339.92 ft amsl)
- 211-B-004 (8-10 ft bgs/361.94-363.94 ft amsl), 211-B-004 (18-20 ft bgs/351.94-353.94 ft amsl), 211-B-004 (38-40 ft bgs/331.94-333.94 ft amsl)
- MW516 (10-12 ft bgs/360.77-362.77 ft amsl), MW516 (25-26 ft bgs/346.77-347.77 ft amsl), MW516 (40-42 ft bgs/330.77-332.77 ft amsl)

The calculated average hydraulic conductivity values ranged from 1.6E-9 cm/s to 3.3E-6 cm/s.

Injection test results provided estimates of the likely injection pressures and flow rates during performance of an injection-based remedy. MWs MW514, MW515, and MW516 were tested at pressures

of 25, 50, 75, and 100 psi and the flow rate was recorded. The injection flow rates and pressures were used as inputs for hydraulic conductivity calculation by the Jacob-Lohman Method, provided by the U.S. Geological Survey (USGS 2002). The Jacob-Lohman method calculated hydraulic conductivity values ranged from $8.8\text{E-}6$ cm/s to $1.3\text{E-}4$ cm/s. A viable injection pressure was not determined conclusively based on the tests conducted at these locations. The groundwater elevation increased on multiple instances during injection testing; however, the water level elevation decreased significantly after completion of the test and prior to the start of the next test. Based on this observation, it is suspected that the bentonite seal between the nested well screens did not provide an effective seal resulting in a preferential path for pressure stress, artificially increasing groundwater levels during testing. If required, future injection efforts should consider the use of direct push injection, as opposed to nested well injection. Injection by DPT tends to create a better seal with the borehole, decreasing the chance of injection fluid making its way to the ground surface. Using the direct push injection method and the injection test data, a flow rate of approximately 2.4 gpm at a pressure of 50 psi should provide effective distribution of injectate among the HU1, HU2, and HU3 formations at SWMU 211-B.

A laboratory evaluation of soil samples was performed to obtain soil GSD information (see Appendix F). GSD analyses (ASTM D422) were performed at the following locations:

- 211-B-007 (8-12 ft bgs/360.03-364.03 ft amsl), 211-B-007 (27.5-31.5 ft bgs/340.53-344.53 ft amsl), 211-B-007 (42.5-44 ft bgs/328.03-329.53 ft amsl)
- 211-B-004 (5-7.5 ft bgs/364.44-366.94 ft amsl), 211-B-004 (21.1-23.5 ft bgs/348.44-350.84 ft amsl), 211-B-004 (36-38 ft bgs/333.94-335.94 ft amsl)
- 211-B-001 (8-10 ft bgs/361.92-363.92 ft amsl), 211-B-001 (18-20 ft bgs/351.92-353.92 ft amsl), 211-B-001 (38-40 ft bgs/331.92-333.92 ft amsl)

Overall, the GSD results indicate that injection technologies would be expected to be successful (though rate/pressure limited due to grain size) at SWMU 211-B.

Table 13. Summary of Hydrologic Unit Hydraulic Conductivities for SWMU 211-B

Permeameter Test Result Summary			
Boring Location	Hydrologic Unit	Sample Depth/Elevation Interval (ft bgs/ft amsl)	Average Vertical Hydraulic Conductivity (cm/s)
211-B-001	HU1	5-7/364.92-366.92	3.8E-08
211-B-001	HU2	15-17/354.92-356.92	3.3E-06
211-B-001	HU3	32-37/334.92-339.92	1.9E-09
211-B-004	HU1	8-10/361.94-363.94	4.8E-07
211-B-004	HU2	18-20/351.94-353.94	1.6E-09
211-B-004	HU3	38-40/331.94-333.94	2.5E-09
MW516	HU1	10-12/360.77-362.77	9.2E-07
MW516	HU2	25-26/346.77-347.77	4.6E-08
MW516	HU3	40-42/330.77-332.77	1.1E-07

Injection Test Result Summary				
Monitoring Well	Hydrologic Unit	Injection Pressure (psi)	Average Flow Rate (gpm)	Calculated Horizontal Hydraulic Conductivity (cm/s)
MW514	HU1	25	2.3	1.3E-04
MW514	HU1	50	2.4	6.7E-05
MW514	HU1	75	3.1	4.2E-05
MW514	HU1	100	3.4	3.3E-05
MW515	HU2	25	1.9	3.9E-05
MW515	HU2	50	2.8	1.8E-05
MW515	HU2	75	3.7	1.2E-05
MW515	HU2	100	4.5	8.8E-06
MW516	HU3	25	1.9	4.6E-05
MW516	HU3	50	3.1	2.4E-05
MW516	HU3	75	3.3	1.6E-05
MW516	HU3	100	4.2	1.2E-05

THIS PAGE INTENTIONALLY LEFT BLANK

7. SWMU 211-A DATA EVALUATION AND ASSESSMENT


Data collected during the RDSI further delineated the magnitude and areal and vertical extents of TCE and other VOC contamination in SWMU 211-A within the Southwest Plume source areas. The results of the RDSI and previous investigations of the SWMU 211-A area indicate that soils containing VOC contamination are located within the subsurface north of the northeast corner of the C-720 Building Area. The highest level of TCE (4,800 µg/kg) detected during the RDSI was at a depth of 47.5 ft bgs/326.97 ft amsl (211-A-036), with low-levels of *cis*-1,2-DCE (77 µg/kg) and 1,1-DCE (3,300 µg/kg) also detected. Sample location 211-A-036 is located approximately 240 ft north by northwest of the previous investigation maximum concentration (8,100 µg/kg TCE at 30 ft depth/344.39 ft amsl elevation in location 720-027 from the WAG 27 RI). RDSI soil locations from this investigation in close proximity to historical soil sample location 720-027 are 211-A-010 and 211-A-017, with 211-A-017 having the greatest TCE concentration of 1,600 µg/kg at 30.1 ft bgs/344.79 ft amsl. Among the Southwest Plume SI borings in the SWMU 211-A area, TCE levels were highest in location 720-105 (980 µg/kg at 46 ft depth/approximately 328.2 ft amsl) (DOE 2007). Overall results from the soil samples indicate that dehalogenation (i.e., degradation of parent VOCs to daughter products such as TCE degrading to *cis*-1,2-DCE and VC) is occurring. Of the 542 soil samples collected for VOC analysis during the RDSI, 316 samples have a TCE detection, 196 samples have a 1,1-DCE detection, 189 samples have a *cis*-1,2-DCE detection, no samples have a *trans*-1,2-DCE detection, and 23 samples have a VC detection. Groundwater analysis results also support that TCE degradation is occurring.

Results of the UCD soil samples from the RDSI and historical data were used to create a three-dimensional contamination model using the software Environmental Visualization Systems Expert System (EVS-ES). A five-layer geologic model was used for modeling soil contamination. Analytical results from this investigation and all historical soil TCE data for the SWMU 211-A investigation area in the OREIS, shown in Figure 6, were log processed in the model. The Horizontal/Vertical Anisotropy Ratio parameter, which allows the model to take into consideration expected differences in fluid flow through the soil matrix, was set to a value of 1.5. The Octant Search method was used to determine which sample points are selected for inclusion in the kriging matrix. This method sets a maximum number of points for each octant, which helps offset bias effects of sampling distribution irregularities. The model used a soil density of 1.4 g/cc and a chemical density of 1.46 g/cc. The SWMU 211-A soil impacted greater than 75 µg/kg of TCE based upon a 90% confidence level that is estimated to have an areal extent of 34,000 ft². The mass of TCE in the SWMU 211-A soil impacted greater than 75 µg/kg is estimated to be 2.2 gal (12 kg). Figure 6 also shows the smaller areas of 75 µg/kg soil TCE (50% confidence limit) and 1,000 µg/kg soil TCE (90% confidence limit) for comparison. These extents define distinct east and west areas of TCE contamination.

Figure 9⁷ shows a cross-section through the locations of the greatest magnitude concentrations. The TCE isopleths depicted in Figure 9 show a predominance of TCE impacts in the western portion of the cross-section in the 25 to 50 ft bgs depth interval. A sensitivity analysis was performed. The sensitivity analysis utilized a range of values to evaluate the area of VOC impacts and volume present. The volume/mass estimates range from 0.2 gal/1 kg to 2.2 gal/12 kg for a range of 10% to 90% confidence level with a volume/mass of 0.7 gal/4 kg for the 50% confidence level. A CD containing viewable three-dimensional model EVS-ES files and supporting calculations and technical details are included in Appendices B and C.

⁷ Figure 9 is a cross section taken from a three-dimensional model of TCE sample results. Where samples were not collected for laboratory analyses from the bottom depth of a soil boring (samples were collected at discrete intervals targeted by field measurements over each 5-ft interval), the bottom depths depicted on Figure 9 do not represent the total depth of the soil boring.

THIS PAGE INTENTIONALLY LEFT BLANK

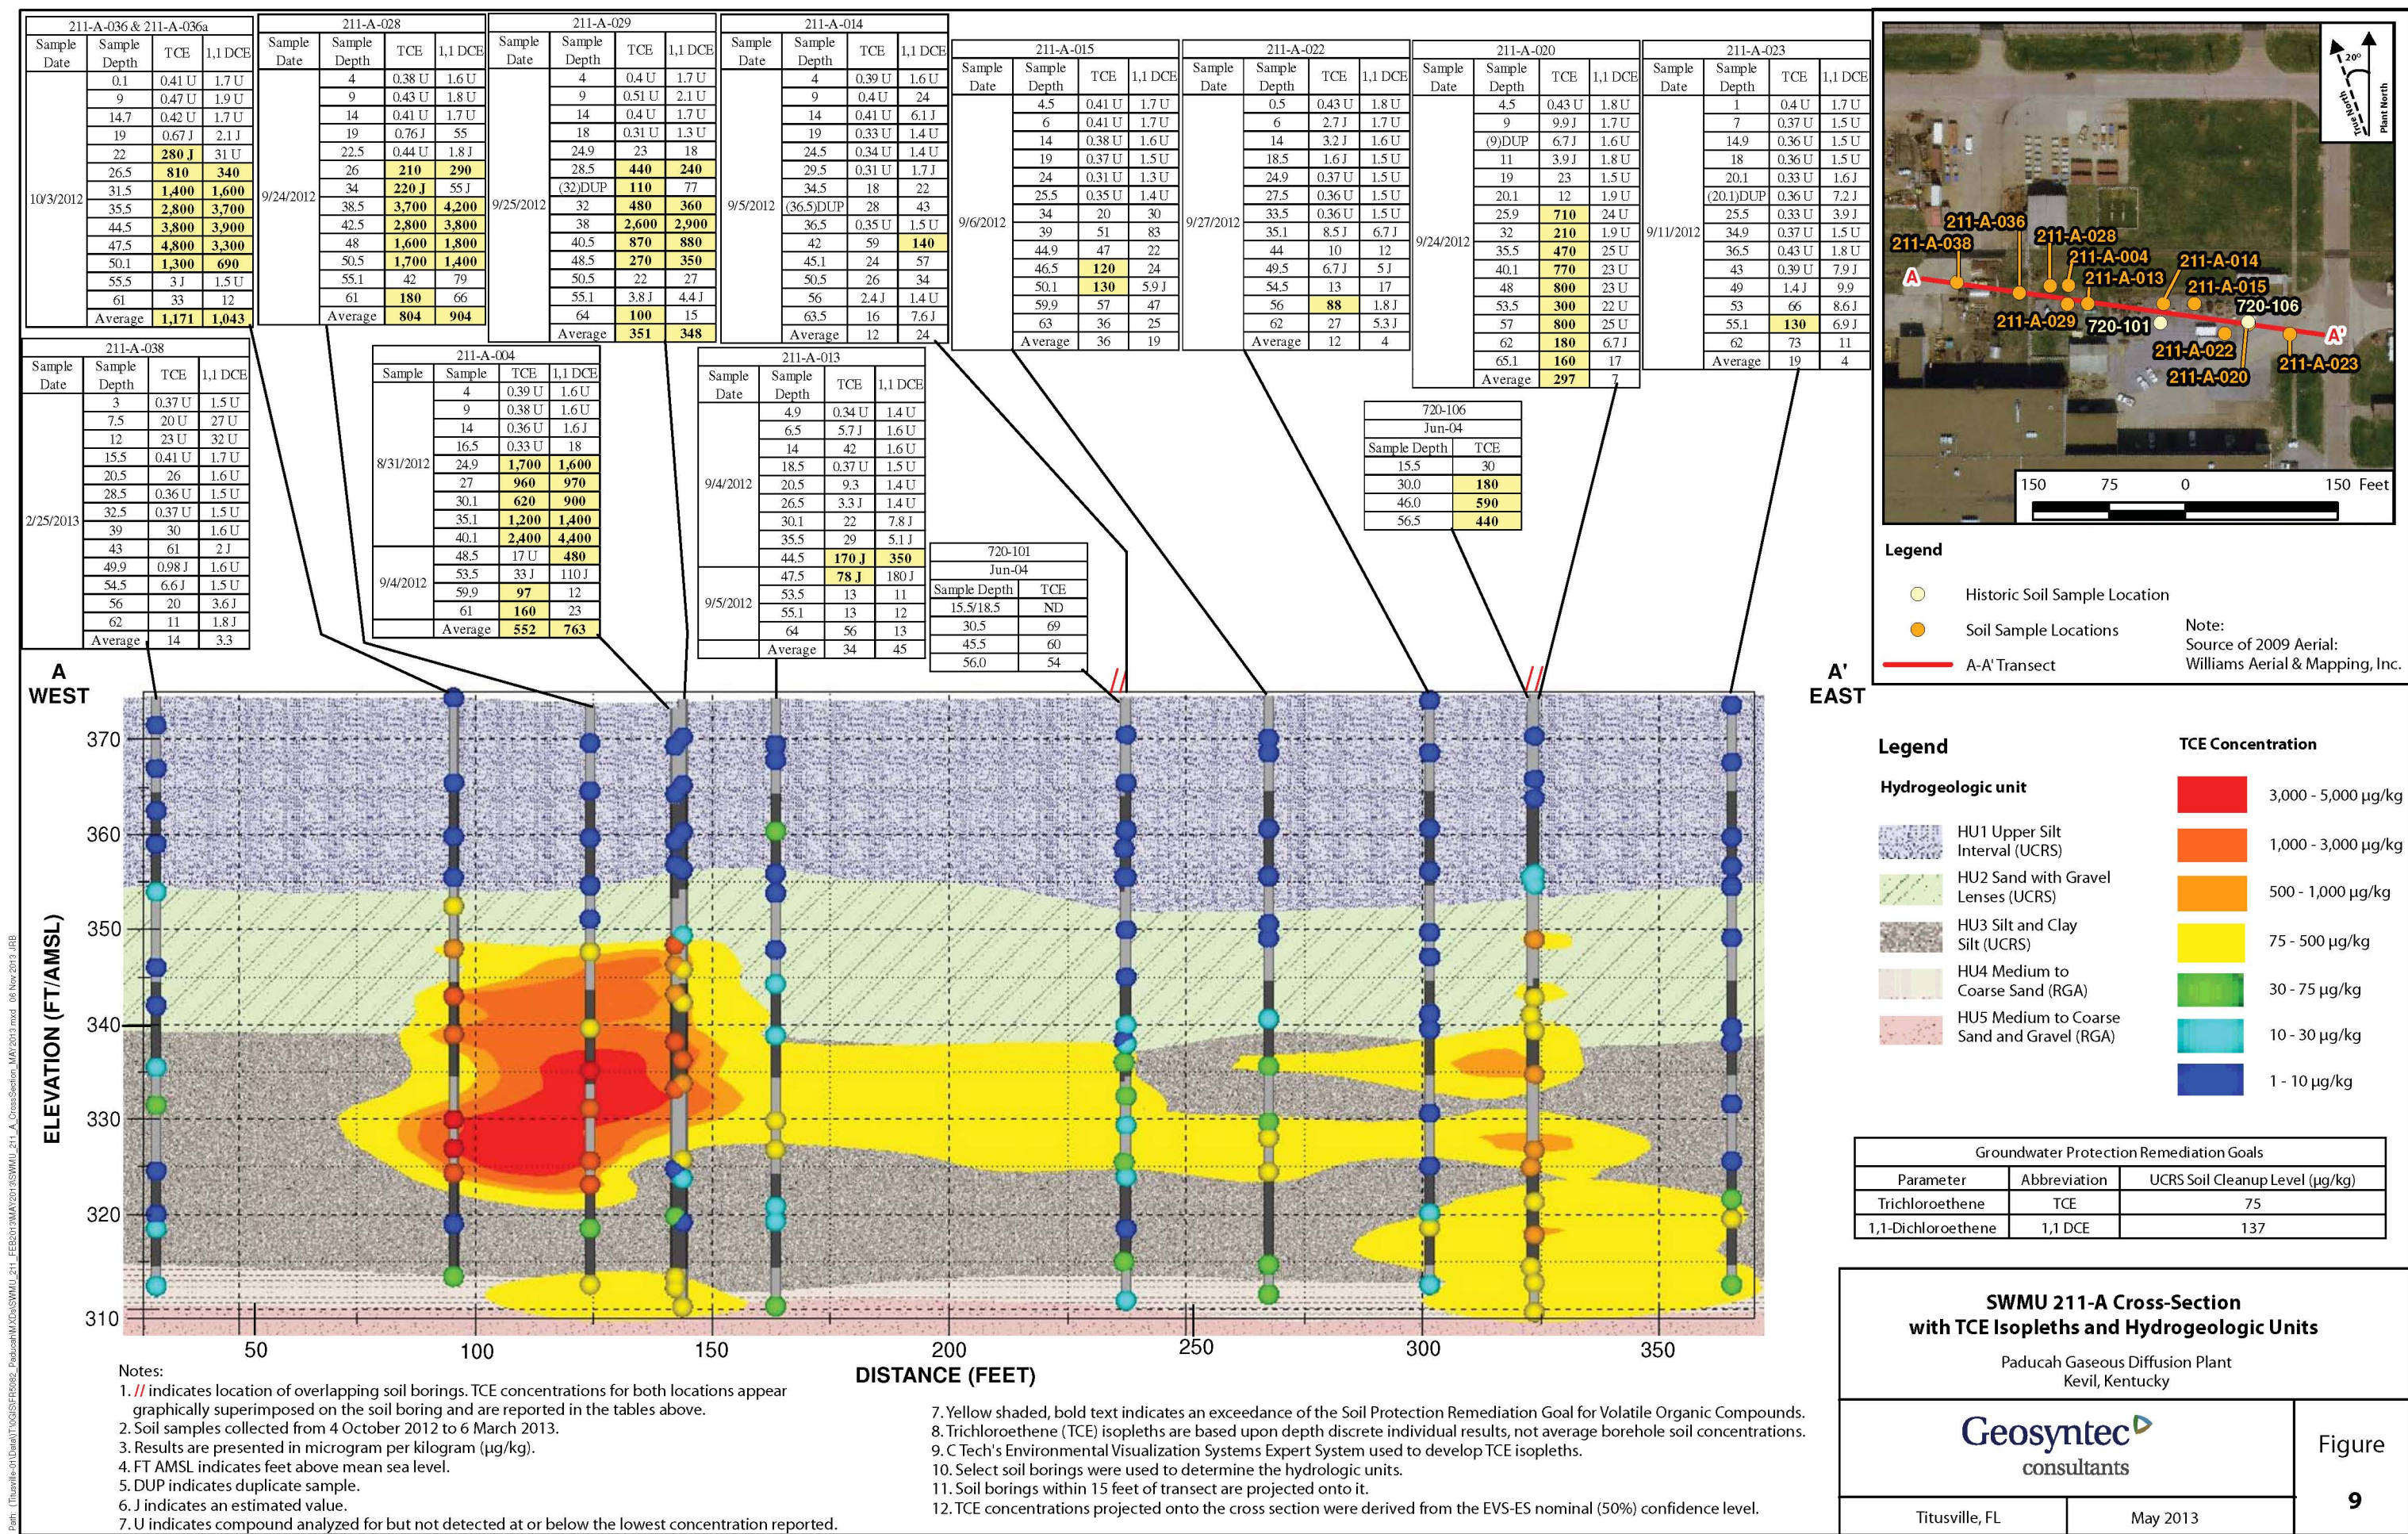

THIS PAGE INTENTIONALLY LEFT BLANK

There are two areas with soil remediation goal exceedances that are defined by the areal distribution of soil boring locations with depth-average TCE concentration greater than 75 µg/kg. Although there are 1,1-DCE exceedances, their location is less extensive and coincides with TCE exceedances. The western area (defined by borings 211-A-004, 211-A-005, 211-A-028, 211-A-029, 211-A-033, 211-A-035, and 211-A-036) covers approximately 15,900 ft² (based upon 50% nominal 75 µg/kg isocontour) laterally with a depth interval of 6 ft bgs to 64 ft bgs. The eastern area (defined by borings 211-A-002, 211-A-010, 211-A-017, 211-A-020, and 211-A-025) covers approximately 15,000 ft² (based upon 50% nominal 75 µg/kg isocontour) laterally with a depth interval from 6.5 ft bgs to 65.1 ft bgs.

Overall, FCR findings tend to be consistent with the current CSM regarding the depth and magnitude of VOC soil contamination; however, the horizontal location of the greatest TCE soil impact (potential source area) does not align with previous SI findings. The current CSM assumes the TCE source area is located near soil sample location 720-027 (DOE 1999) (see Figure 4). During performance of the RDSI, the greatest magnitude TCE concentration was located at soil sample location 211-A-036, which indicates that an additional TCE source also is located west of soil sample location 720-027. A number of depth-averaged TCE concentration soil boring locations lower than 75 µg/kg were installed between historical location 720-027 and 211-A-036 indicating separate source areas. The information presented in this FCR indicates that the area of TCE source-based mass for the 211-A site is larger than previously assumed.

THIS PAGE INTENTIONALLY LEFT BLANK

8. SWMU 211-B DATA EVALUATION AND ASSESSMENT

RDSI results and those of previous investigations of the SWMU 211-B area indicate that soils containing low-levels of VOC contamination are present in the subsurface at the southeast corner of the C-720 Building Area (Figure 8). The greatest TCE soil concentration (13,000 µg/kg) detected during this investigation was at 25.1 ft bgs/346.90 ft amsl (211-B-019), which is approximately 10 ft west of the previous investigation maximum concentration (68,000 µg/kg) location (720-002 at 20 ft depth/351.80 ft amsl). Another soil location from this investigation in close proximity to 720-002 is 211-B-005, with a maximum TCE concentration of 3,100 µg/kg at a depth of 23 ft bgs/348.94 ft amsl. Overall results from the soil samples indicate that dehalogenation likely is occurring at SWMU 211-B. Of the 245 soil samples collected for VOC analysis during the RDSI, 171 samples have a TCE detection and 27 samples have a *cis*-1,2-DCE detection. Groundwater analysis results also support this finding. The TCE soil isopleths depicted in Figure 10⁸ show that the mass present is predominantly located in HU2, with limited low-level detections below HU3 (near the RGA).

Overall, RDSI VOC results at SWMU 211-B trend to be consistent with the previous CSM. The lateral location, vertical location, and magnitude of the greatest magnitude TCE impacts align with previous SI findings. Data available at SWMU 211-B are sufficient to provide a foundation for selection of an appropriate remedial technology to address VOC-impacted groundwater.

As at SWMU 211-A, results of the UCD soil samples from this investigation and historical data were used to create a three dimensional model (using EVS-ES) to represent SWMU 211-B soil impacts. A five-layer geologic model was used for modeling soil contamination. Soil analytical results from this investigation, shown in Figure 8, were log-processed in the model. As at SWMU 211-A, the Horizontal/Vertical Anisotropy Ratio parameter was set to 1.5. The Octant Search method was used to determine which sample points are selected for inclusion in the kriging matrix. The model used a soil density of 1.4 g/cc and a chemical density of 1.46 g/cc. The SWMU 211-B soil impacted greater than 75 µg/kg of TCE is estimated to be 3,213 bank cubic yards (bcy). The mass of TCE in the SWMU 211-B soil impacted greater than 75 µg/kg is estimated to be 5 kg (0.8 gal) at a 90% confidence level. The mass and volume estimates do not extrapolate the area beneath the C-720 Building. Additional TCE impacts mass may be present beneath the C-720 building, but the purpose of this FCR is to select a remedy for accessible soil contamination. Figure 8 also shows the smaller areas of 75 µg/kg soil TCE (50% confidence limit) and 1,000 µg/kg soil TCE (90% confidence limit) for comparison. A sensitivity analysis was performed. The volume/mass estimates range from 0.1 gal/0.6 kg to 0.8 gal/4 kg for a range of 10% to 90% confidence level with a volume/mass of 0.3 gal/2 kg for the 50% confidence level. A CD containing viewable three-dimensional model EVS-ES files and details regarding the sensitivity analysis are included in Appendices B and C.

The area potentially requiring treatment is defined by the areal distribution of soil boring locations with depth-average TCE concentration greater than 75 µg/kg. The area (defined by borings 211-B-001, 211-B-004, 211-B-005, and 211-B-019) covers approximately 3,000 ft² (at a 90% source volume confidence level) laterally with a depth interval of 8.5 ft bgs to 64.5 ft bgs (approximate volume of 6,200 bcy).

⁸ Figure 10 is a cross section taken from a three-dimensional model of TCE sample results. Where samples were not collected for laboratory analyses from the bottom depth of a soil boring (samples were collected at discrete intervals targeted by field measurements over each 5-ft interval), the bottom depths depicted on Figure 10 do not represent the total depth of the soil boring.

THIS PAGE INTENTIONALLY LEFT BLANK

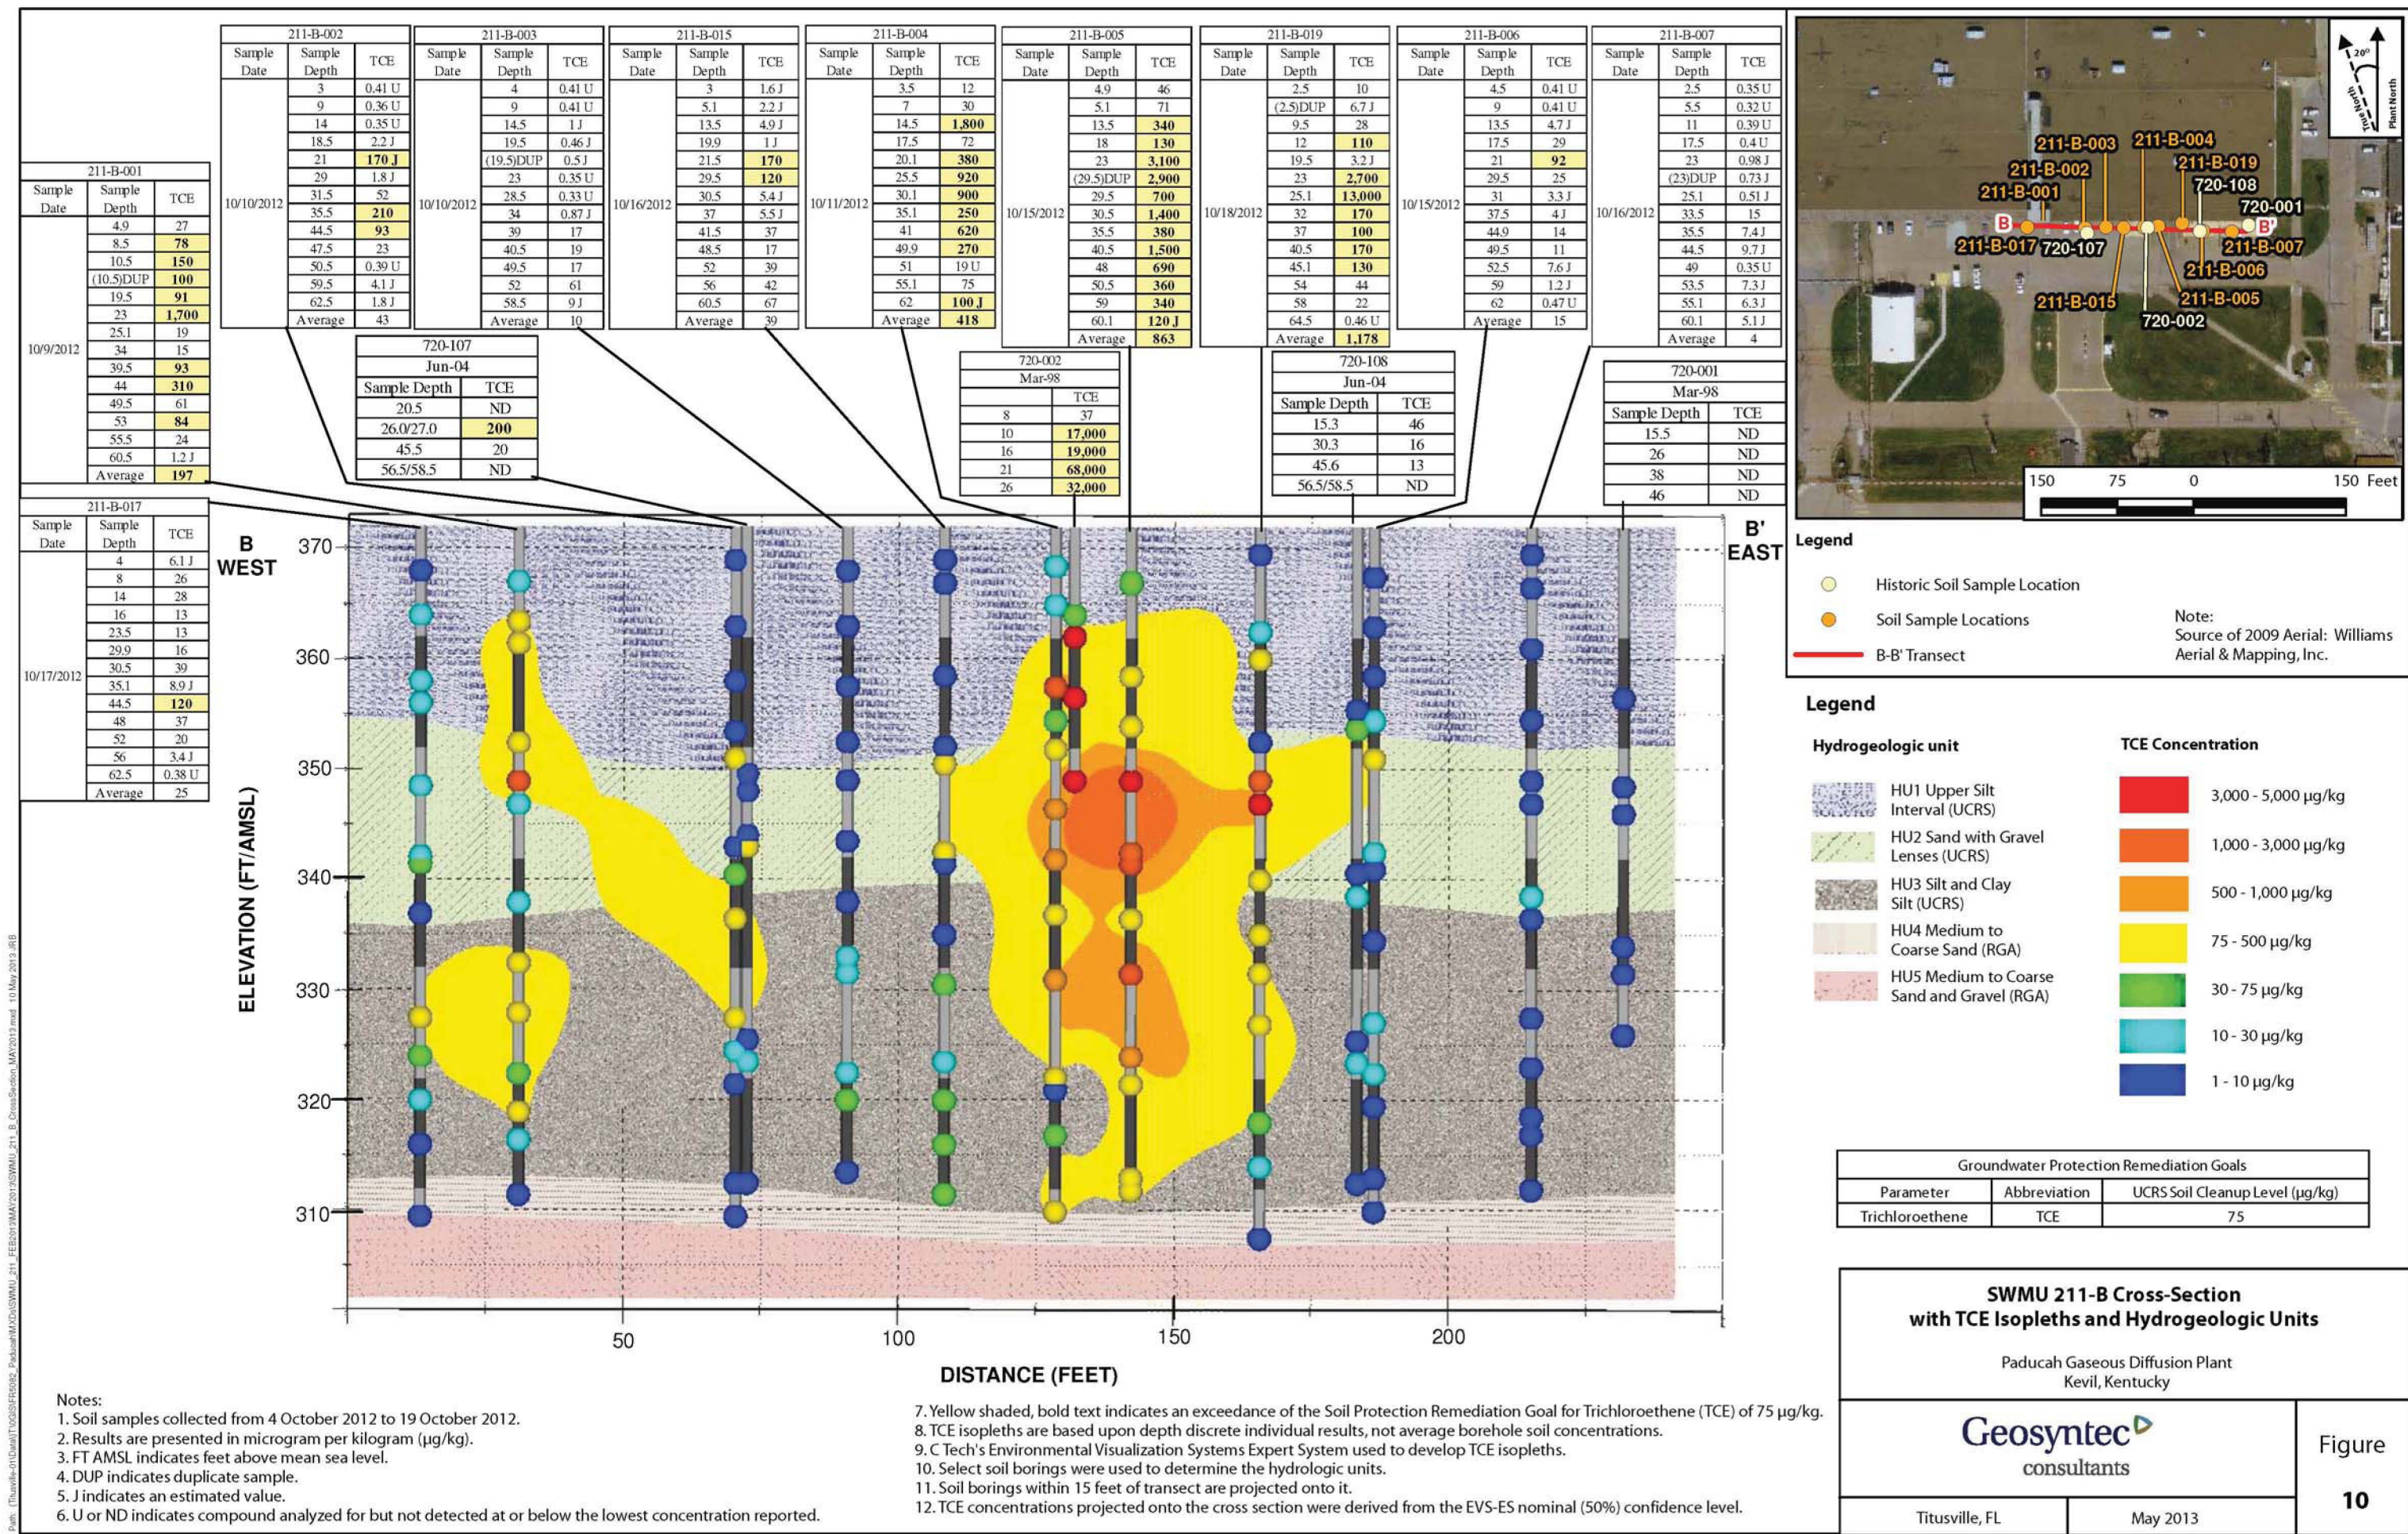


Figure 10. SWMU 211-B Cross-Section with TCE Isopleths and Hydrologic Units

THIS PAGE INTENTIONALLY LEFT BLANK

As similarly stated in the SWMU 211-A section, RDSI data indicate that soil VOC concentrations are decreasing over time, based on natural processes.

THIS PAGE INTENTIONALLY LEFT BLANK

9. CONCLUSION

This FCR presents the results of the RDSI for SWMUs 211-A and 211-B, which were outlined in the *Remedial Design Work Plan for Solid Waste Management Units 1, 211-A, 211-B, Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky* (DOE 2012a). The RDSI was performed to better determine the lateral and vertical extent and distribution of VOCs and source material in the Southwest Plume source areas and to determine soil and groundwater parameters, including geochemical parameters, at each of the SWMUs to be used to design *in situ* bioremediation, if this alternative is selected. The results of this RDSI provide the data necessary for identifying the areas to be treated and selecting the remedies at SWMUs 211-A and 211-B.

The selected remedy, as identified in the ROD for SWMUs 211-A and 211-B pending this final characterization of source extent and magnitude, is *in situ* source treatment using enhanced *in situ* bioremediation with LUCs (Alternative 8) or long-term monitoring with interim LUCs (Alternative 2).

SWMU 211-A. Data collected during the RDSI further delineated the magnitude and areal and vertical extents of TCE and other VOC contamination at SWMU 211-A. As during previous investigations, RDSI results indicate that soils containing VOC contaminations are located at the northeast corner of the C-720 Building Area. However, the highest level of TCE (4,800 µg/kg) detected during the RDSI was at sample location 211-A-036, which is located approximately 240 ft west of the previous investigation maximum concentration (8,100 µg/kg TCE) location (720-027 at 30-ft depth/344.39 ft amsl elevation). The SWMU 211-A soil volume impacted greater than the remediation goal of 75 µg/kg of TCE is estimated to be 29,000 bcy with an areal extent of 34,000 ft² (using both the RDSI data and all historical soil TCE data for the SWMU 211-A investigation area in OREIS). Approximately 2.2 gal (12 kg) of TCE at a 90% confidence level is estimated to be present.

As part of the hydrologic analysis to assess the ability of the HU1, HU2, and HU3 formations to accept injectate at suitable pressures and flow rates, soil conditions at SWMU 211-A appear to be consistent with the requirements associated with an injection-dependent technology.

Overall results from the RDSI indicate that limited dehalogenation (i.e., degradation of parent VOCs to daughter products such as TCE degrading to *cis*-1,2-DCE and VC and 1,1,1-TCA to 1,1-DCE) is occurring at SWMU 211-A.

SWMU 211-B. The lateral location, vertical location, and magnitude of the greatest magnitude TCE impacts align with the current CSM. RDSI results at SWMU 211-B indicate that soils containing VOC contamination are present in the subsurface at the southeast corner of the C-720 Building Area. VOC concentrations are decreasing over time. RDSI soil data indicate that dehalogenation likely is occurring, but is inhibited at SWMU 211-B. The SWMU 211-B soil impacted greater than the remediation goal of 75 µg/kg of TCE is estimated to be 3,213 bcy (using both RDSI data and all historical soil TCE data for the SWMU 211-B investigation area in OREIS). The mass of TCE in the SWMU 211-B soil impacted at TCE concentrations greater than 75 µg/kg and accessible for possible treatment is estimated to be 5 kg (0.8 gal) at a 90% confidence level. Any TCE contamination located underneath the C-720 Building footprint associated with SWMU 211-B will be addressed, as appropriate, under the Soils and Slabs OU, as specified in the Fiscal Year 2013 Site Management Plan (DOE 2013).

The hydrologic analysis to assess the ability of the HU1, HU2, and HU3 formations to accept injectate at suitable pressures and flow rates indicates that soil conditions at SWMU 211-B are consistent with the requirements associated with an injection dependent technology: a flow rate of approximately 2.4 gpm at a pressure of 50 psi, if achievable, should provide effective distribution of injectate among the HU1, HU2,

and HU3 formations at SWMU 211-B. Overall results from the RDSI indicate that limited dehalogenation (i.e., degradation of parent VOCs to daughter products such as TCE degrading to *cis*-1,2-DCE) is occurring at SWMU 211-B.

10. REFERENCES

- CH2M HILL 1992. *Results of the Site Investigation, Phase II, at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, KY/SUB/13B-97777CP-03/1991/1, CH2M Hill Southeast, Inc., Oak Ridge, TN, April.
- DOE (U.S. Department of Energy) 1997. Data Summary and Interpretation Report for Interim Remedial Design at Solid Waste Management Unit 2 of Waste Area Grouping 22 at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky, DOE/OR/07-1549&D1, U.S. Department of Energy, Paducah, KY, February.
- DOE 1999. Remedial Investigation Report for Waste Area Grouping 27 at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky, DOE/OR/07-1777&D2, U.S. Department of Energy, Paducah, KY, June.
- DOE 2000a. *Remedial Investigation Report for Waste Area Grouping 3 at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, DOE/OR/07-1895&D1, U.S. Department of Energy, Paducah, KY, September.
- DOE 2000b. *Data Report for the Sitewide Remedial Evaluation for Source Areas Contributing to Off-Site Groundwater Contamination at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, DOE/OR/07-1845/D1 (also known as Data Gaps document), U.S. Department of Energy, Paducah, KY, January.
- DOE 2001. *Feasibility Study for the Groundwater Operable Unit at Paducah Gaseous Diffusion Plant Paducah, Kentucky*, DOE/OR/07-1857&D2, U.S. Department of Energy, Paducah, KY, August.
- DOE 2007. *Site Investigation Report for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, DOE/OR/07-2180&D2/R1, U.S. Department of Energy, Paducah, KY, May.
- DOE 2011. *Revised Focused Feasibility Study for Solid Waste Management Units 1, 211-A, and 211-B Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, DOE/LX/07-0362&D2, U.S. Department of Energy, Paducah, KY, May.
- DOE 2012a. *Remedial Design Work Plan for Solid Waste Management Units 1, 211-A, and 211-B Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, DOE/LX/07-1268&D2/R2, U.S. Department of Energy, Paducah, KY, June.
- DOE 2012b. *Record of Decision for Solid Waste Management Units 1, 211-A, and 211-B, and Part 102 Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, DOE/LX/07-0365&D2/R1, U.S. Department of Energy, Paducah, KY, March.
- EPA (U.S. Environmental Protection Agency) 1986. *Guidelines for Ground-Water Classification under the EPA Ground-Water Protection Strategy*, U.S. Environmental Protection Agency, November.

- EPA 2006. *Guidance on Systematic Planning Using the Data Quality Objectives Process*, EPA QA/G-4, EPA/240/B-06/001, U.S. Environmental Protection Agency, Washington, DC, February.
- Jacobs EM Team 1997. *Groundwater Conceptual Model for the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, DOE/OR/06-1628&D0, Jacobs EM Team, Kevil, Kentucky, August.
- LATA Kentucky (LATA Environmental Services of Kentucky, LLC) 2010. *Environmental Monitoring Procedure, Quality Assured Data*, PAD-ENM-5003, Revision Number 0, LATA Environmental Service of Kentucky, LLC, September.
- LATA Kentucky 2012. *Health and Safety Plan for the Southwest Plume Remedial Design Support Investigation at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, PAD-PROJ-13-0133/R0, LATA Environmental Services of Kentucky, LLC, Kevil, KY, July.
- MMES (Martin Marietta Energy Systems) 1992. *Report of the Paducah Gaseous Diffusion Plant Groundwater Investigation Phase III*, KY/E-150, Martin Marietta Energy Systems, Inc., Paducah, KY, November.
- USGS (U.S. Geological Survey) 2002. *Documentation of Spreadsheets for the Analysis of Aquifer-Test and Slug-Test Data*, 02-197, U.S. Geological Survey, Carson City, NV. Spreadsheets used for calculations are available at the following Web site: <http://pubs.usgs.gov/of/2002/ofr02197/>.

APPENDIX A


MONITORING WELL CONSTRUCTION LOGS

THIS PAGE INTENTIONALLY LEFT BLANK

MONITORING WELL CONSTRUCTION LOG

Location Name: Paducah Gaseous Diffusion Plant
Address: 5600 Hobbs Road
City/State/Zip: West Paducah, KY 42053


State Assigned # 8006-5911, 8006-5913
Agency Interest # 3059
Facility Assigned # MW-511, MW-513

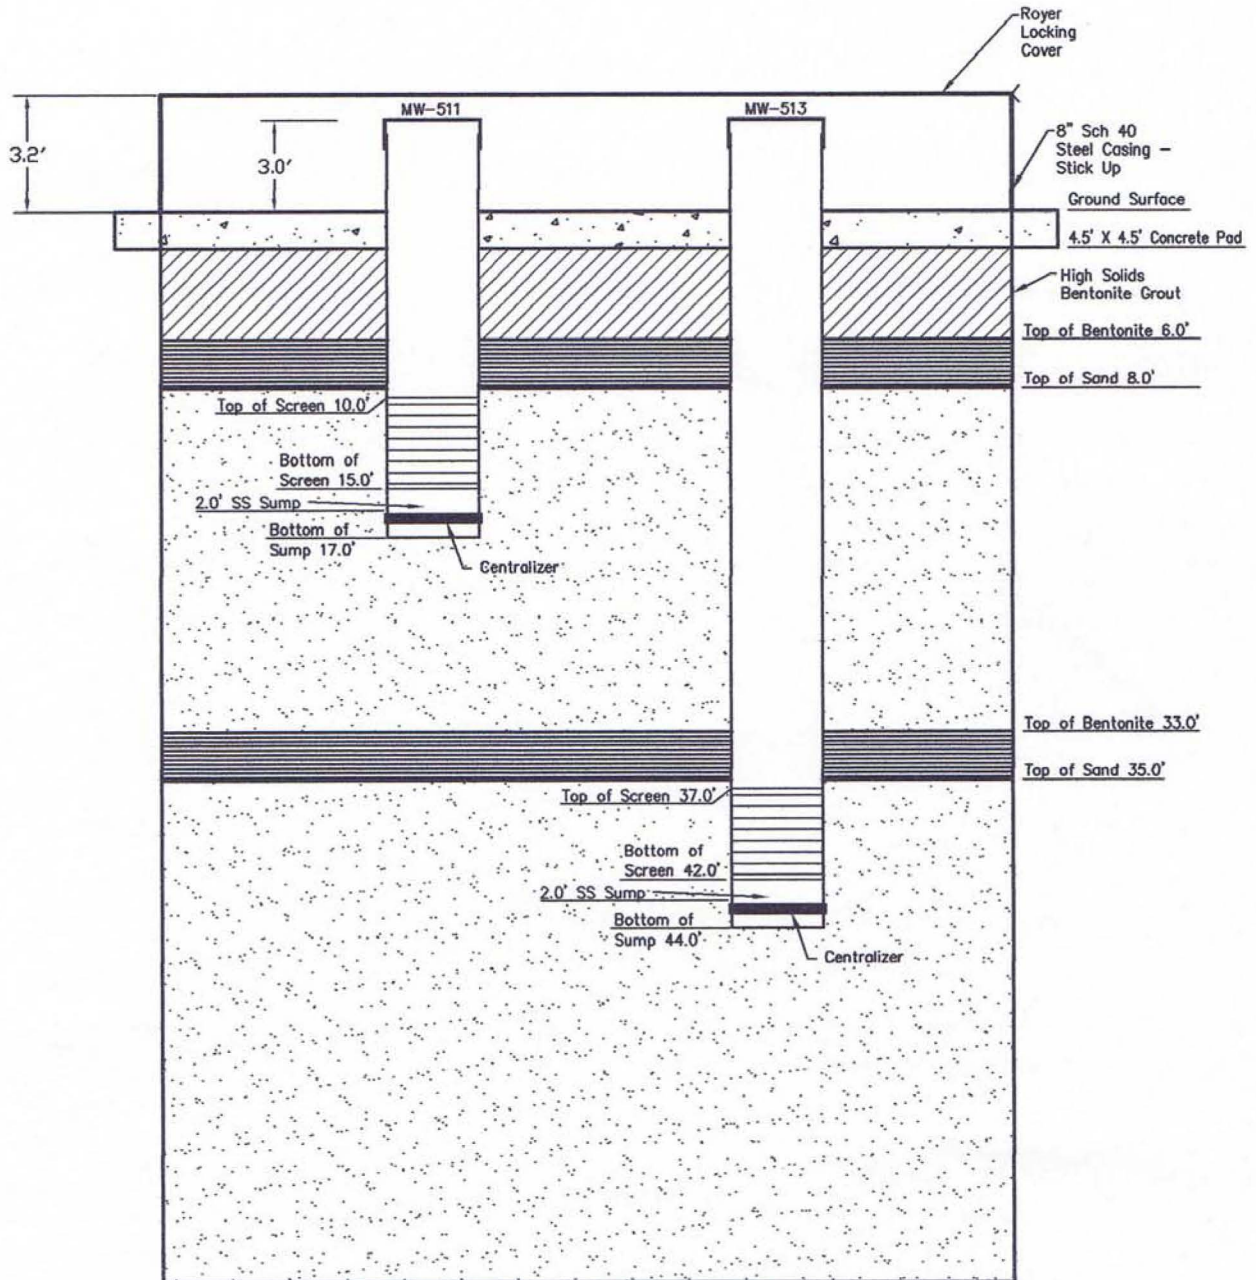

ceg CHASE
Environmental Group INC

Comments: Drawing not to scale.

2009230

						<h1>Soil Boring Log</h1>		Page 1 of 1	
Project: Southwest Plume RDSI – C-720 Northeast						Boring Location: MW-511/MW-513			
Date Drilled: 8/24/12						Sampling Method: Dual Tube			
Date Completed: 8/27/12						Surface Elevation:			
Drilling Method: 6.25" ID HSAs						Total Depth: 44.5			
Drilling Company: Chase Environmental Group						Logged By: Ken Davis, LATA of Kentucky			
DEPTH <i>feet</i>	SAMPLE NUMBER	BLOW COUNT 6"	PID ppm	REC	FORMATION	GEOLOGIC DESCRIPTION			
0.0						Dark Gray to Light Brown Silty GRAVEL w/organics			
2.5						Light Brown to Dark Gray SILT, Soft, Moist			
15.2						Reddish Yellow to Light Gray Gravely Fine SAND grading to SILT, Soft to Dense, Moist			
21.5						Light Gray to Pale Brown Fine SAND w/GRAVEL, Hard, Moist			
35.2						White to Reddish Yellow Silty Fine SAND, Soft, Moist			
44.5						No Refusal – Boring Terminated @ 44.5 in SAND As Above.			

Drilling & Remedial Action Contractors
 9470 Hwy. 60 West – Kevil, Kentucky 42053
 270-488-2584 Fax: 270-488.2586

UNIFORM KENTUCKY WELL CONSTRUCTION RECORD

Use this form to report installation of monitoring or water wells.

Form must be completed and submitted to the Division of Water within 60 days of well completion.

See instructions below.

One copy to owner and one copy to driller's files.

Owner Name(*)	United States Department of Energy		
Owner First Name(*)	NA	Owner Last Name(*)	NA
Owner Address(*)	5600 Hobbs Road		
Owner City(*)	West Paducah	State(*)	Kentucky
Owner Zip(*)	42086		
Owner Phone(*)	270-441-6800	Owner eMail	

Site Name(*)	Paducah Gaseous Diffusion Plant		
Site Address(*)	5600 Hobbs Road		
Site City(*)	West Paducah	State(*)	Kentucky
Site Zip(*)	42086		
Site Phone	270-441-6800	Site eMail	
Well Latitude(*)	37.114	Well Longitude(*)	-88.815
Method(*)	Map Grade GPS - Differentially Corrected		

Agency Interest (AI) Number	3059	Facility Type & ID	CERCLA
USGS Topo Map(*)	HEATH	County(*)	McCracken
Surface elevation (ft)	370	Elevation determined by	Topographic map interpolation - digitized
Physiographic Region(*)	Jackson Purchase	Well Use(*)	Monitoring well - compliance
Drilling Method(*)	Auger - hollow stem	Well Status(*)	active
Wellhead(*)	Locking Cap	Well Condition(*)	Functioning properly

Casing / Open Borehole					
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)	Casing diameter (in)(*)	Casing type(*)
Delete	0	10.0	10.5	2	Steel - stainless
Delete	15.0	17.0	10.5	2	Steel - stainless
Add New					

Screen					
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)	Screen diameter (in)(*)	Screen Type(*)
Delete	10.0	15.0	10.5	2	Steel - stainless
Add New					

Annulus fill and seal				
	Section(*)	From depth (ft)(*)	To depth (ft)(*)	Material(*)
Delete	Grout	1	6.0	Bentonite
Delete	Seal	6.0	8.0	Bentonite
Delete	Filter Pack	8.0	33.0	Sand
Add New				

Lithologic log	
	From depth (ft)(*) To depth (ft)(*) Description(*)
Add New	

Site Map/Sketch Map(*)	Browse...
Well Diagram (monitoring well)	Browse...
Coliform analysis (if applicable)	Browse...
Signed variance (if applicable)	Browse...
Other laboratory analysis report (if applicable)	Browse...
Casing/Screen Supplemental Info	Browse...

Comments	This is the shallow well in a 2 well nested set.
----------	--

Affirmation: I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. By submitting data, this transmission constitutes my signature and I am responsible for any and all content submitted either by me or by the people I represent.

Signature of certified driller & PIN(*)	Todd W Mills	Date Signed(*)	03/27/2013
Driller First Name(*)	Todd	Driller Last Name(*)	Mills
Certification Number(*)	0344-0454-00	Certification Company(*)	Chase Environmental Group, Inc.

Kentucky Well ID (AKGWA) Number(*)	8006-5911
Owner Well ID	MW-511
Work Start Date(*)	08/24/2012
Work End Date(*)	08/27/2012
Total depth (ft)(*)	17.0
Depth to bedrock (ft)	
Static water level (ft)	
SWL method(*)	Undetermined
Casing height above surface (in)	

WATER WELLS ONLY

Estimated well yield	
Well Yield Method	
Well service (# of people served)	
Disinfectant amount	
Disinfectant type	
Pitless adapter installed	
Pump installed	
Depth to intake (ft)	

Apparent quality and odor:

Appearance	
Odor Type	
Odor - Level	

Coliform Test

Coliform test type	
Coliform test results	or # colonies per 100 ml
Date Sampled	
Date Analyzed	

Save For Future Retrieval

Submit to DEP

UNIFORM KENTUCKY WELL CONSTRUCTION RECORD

Use this form to report installation of monitoring or water wells.

Form must be completed and submitted to the Division of Water within 60 days of well completion.

See instructions below.

One copy to owner and one copy to driller's files.

Owner Name(*)	United States Department of Energy		
Owner First Name(*)	NA	Owner Last Name(*)	NA
Owner Address(*)	5600 Hobbs Road		
Owner City(*)	West Paducah	State(*)	Kentucky
Owner Zip(*)	42086		
Owner Phone(*)	270-441-6800	Owner eMail	
Site Name(*)	Paducah Gaseous Diffusion Plant		
Site Address(*)	5600 Hobbs Road		
Site City(*)	West Paducah	State(*)	Kentucky
Site Zip(*)	42086		
Site Phone	270-441-6800	Site eMail	
Well Latitude(*)	37.114	Well Longitude(*)	-88.815
Method(*)	Map Grade GPS - Differentially Corrected		
DMS to DD Converter			
Agency Interest (AI) Number	3059	Facility Type & ID	CERCLA
USGS Topo Map(*)	HEATH	County(*)	McCracken
Surface elevation (ft)		Elevation determined by	Topographic map interpolation - digitized
Physiographic Region(*)	Jackson Purchase	Well Use(*)	Monitoring well - compliance
Drilling Method(*)	Auger - hollow stem	Well Status(*)	active
Wellhead(*)	Locking Cap	Well Condition(*)	Functioning properly
Casing / Open Borehole			
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)
Delete	0	37.0	10.5
Delete	42.0	44.0	10.5
Add New			
Screen			
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)
Delete	37.0	42.0	10.5
Add New			
Annulus fill and seal			
	Section(*)	From depth (ft)(*)	To depth (ft)(*)
Delete	Grout	1	6.0
Delete	Seal	6.0	8.0
Delete	Filter Pack	8.0	33.0
Delete	Seal	33.0	35.0
Delete	Filter Pack	35.0	44.5
Add New			
Lithologic log			
	From depth (ft)(*)	To depth (ft)(*)	Description(*)
Add New			
Site Map/Sketch Map(*)	Browse...		
Well Diagram (monitoring well)	Browse...		
Coliform analysis (if applicable)	Browse...		
Signed variance (if applicable)	Browse...		
Other laboratory analysis report (if applicable)	Browse...		
Casing/Screen Supplemental Info	Browse...		
Comments	This is the deep well in a 2 well nested set.		
Affirmation: I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. By submitting data, this transmission constitutes my signature and I am responsible for any and all content submitted either by me or by the people I represent.			
Signature of certified driller & PIN(*)	Todd W Mills	Date Signed(*)	03/27/2013
Driller First Name(*)	Todd	Driller Last Name(*)	Mills
Certification Number(*)	0344-0454-00	Certification Company(*)	Chase Environmental Group, Inc.


Kentucky Well ID (AKGWA) Number (*)	8006-5913
Owner Well ID	MW-513
Work Start Date(*)	08/24/2012
Work End Date(*)	08/27/2012
Total depth (ft)(*)	44.0
Depth to bedrock (ft)	
Static water level (ft)	
SWL method(*)	Undetermined
Casing height above surface (in)	

WATER WELLS ONLY

Estimated well yield	
Well Yield Method	
Well service (# of people served)	
Disinfectant amount	
Disinfectant type	
Pitless adapter installed	
Pump installed	
Depth to intake (ft)	
Apparent quality and odor:	
Appearance	
Odor Type	
Odor-Level	
Coliform Test	
Coliform test type	
Coliform test results	or # colonies per 100 ml
Date Sampled	
Date Analyzed	
Save For Future Retrieval	Submit to DEP

MONITORING WELL CONSTRUCTION LOG


Location Name:	Paducah Gaseous Diffusion Plant	State Assigned #	8006-5912
Address:	5600 Hobbs Road	AI #	3059
City/State/Zip:	West Paducah, KY	Facility Assigned #	MW-512

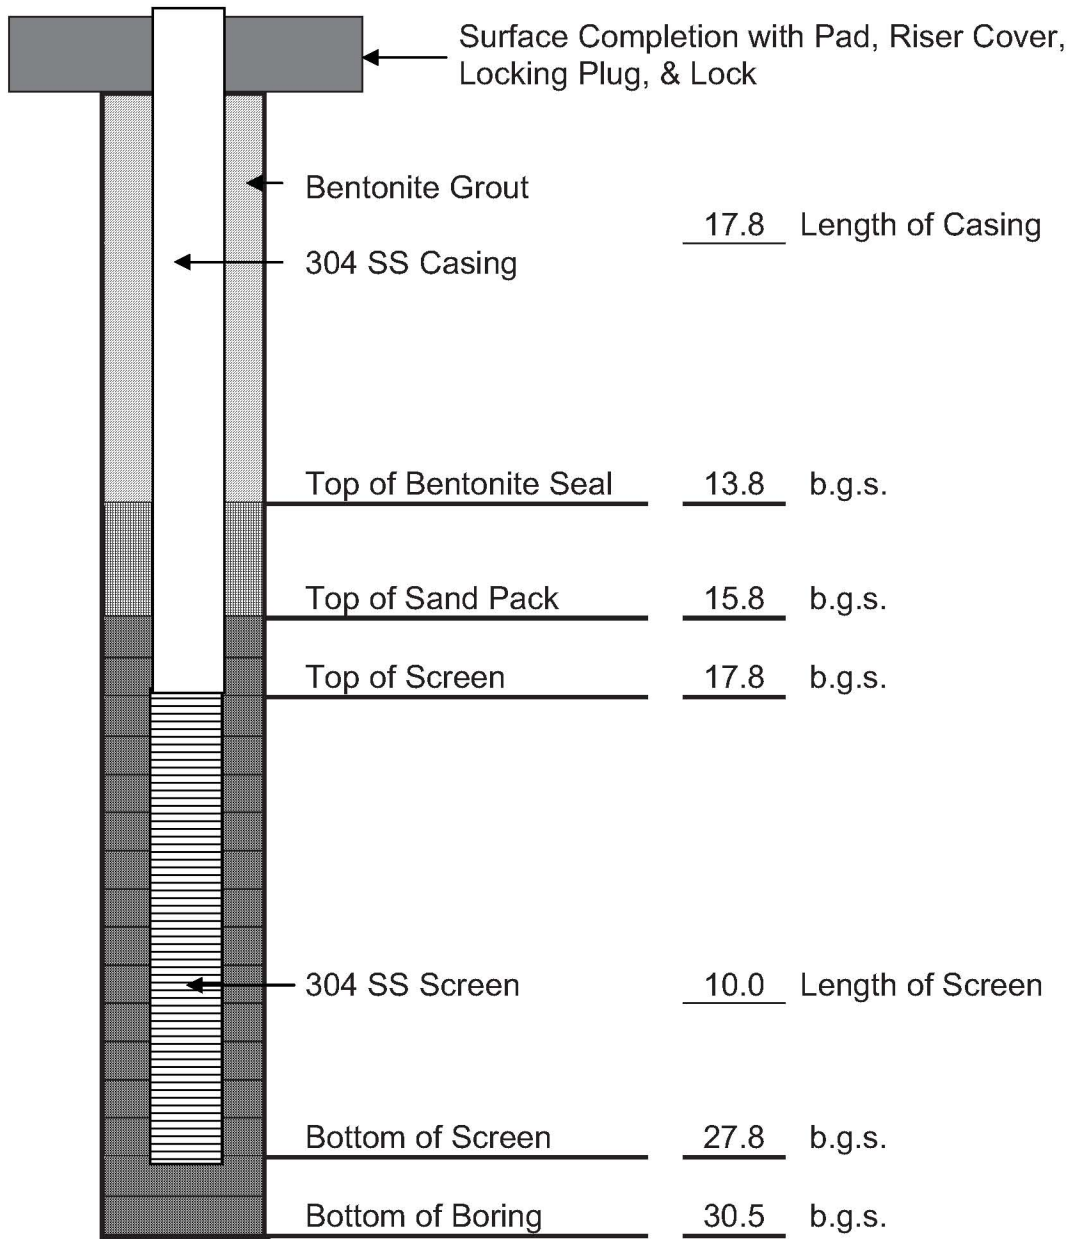

Depth to Groundwater	Dry	Total Depth of Boring (ft)	30.5	Total Depth of Well (ft)	29.8	Borehole Diameter	8.5
Well Diameter	2.0	Slot Size	0.010	Drilling Unconsolidated	30.5	Drilling in Consolidated	--
Date:	08/24/12	Completed By:	Todd W. Mills			Top of Casing	Unk

ceg CHASE
Environmental Group INC

Comments: Drawing not to scale.

						<h1>Soil Boring Log</h1>		Page 1 of 1	
Project: Southwest Plume RDSI – C-720 Northeast						Boring Location: MW-512			
Date Drilled: 8/22/12						Sampling Method: Dual Tube			
Date Completed: 8/24/12						Surface Elevation:			
Drilling Method: 4.25" ID HSAs						Total Depth: 30.5			
Drilling Company: Chase Environmental Group						Logged By: Ken Davis, LATA of Kentucky			
DEPTH feet	SAMPLE NUMBER	BLOW COUNT 6"	PID ppm	REC	FORMATION	GEOLOGIC DESCRIPTION			
0.0						Topsoil w/ Organics Mixed with Pea GRAVEL, Loose, Moist			
1.2						White to Light Brown SILT, Soft, Moist			
20.0						Reddish Yellow to Light Gray Gravely Fine SAND grading to SILT, Soft to Dense, Moist			
22.2						Reddish Yellow to Pinkish Gray Sandy to Clayey GRAVEL, Loose, Moist			
23.7						Light Gray to Pale Brown Silty to Gravely Fine SAND, Firm, Moist			
30.5						No Refusal – Boring Terminated @ 30.5 in SAND As Above.			

Drilling & Remedial Action Contractors
 9470 Hwy. 60 West – Kevil, Kentucky 42053
 270-488-2584 Fax: 270-488.2586

UNIFORM KENTUCKY WELL CONSTRUCTION RECORD

Use this form to report installation of monitoring or water wells.

Form must be completed and submitted to the Division of Water within 60 days of well completion.

See instructions below.

One copy to owner and one copy to driller's files.

Owner Name(*)	United States Department of Energy		
Owner First Name(*)	NA	Owner Last Name(*)	NA
Owner Address(*)	5600 Hobbs Road		
Owner City(*)	West Paducah	State(*)	Kentucky
Owner Zip(*)	42086		
Owner Phone(*)	270-441-6800	Owner eMail	

Site Name(*)	Paducah Gaseous Diffusion Plant		
Site Address(*)	5600 Hobbs Road		
Site City(*)	West Paducah	State(*)	Kentucky
Site Zip(*)	42086		
Site Phone	270-441-6800	Site eMail	
Well Latitude(*)	37.114	Well Longitude(*)	-88.814
Method(*)	Map Grade GPS - Differentially Corrected		

[DMS to DD Converter](#)

Agency Interest (AI) Number	3059	Facility Type & ID	CERCLA
USGS Topo Map(*)	HEATH	County(*)	McCracken
Surface elevation (ft)	370	Elevation determined by	Topographic map interpolation - digitized
Physiographic Region(*)	Jackson Purchase	Well Use(*)	Monitoring well - compliance
Drilling Method(*)	Auger - hollow stem	Well Status(*)	active
Wellhead(*)	Locking Cap	Well Condition(*)	Functioning properly

Casing / Open Borehole					
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)	Casing diameter (in)(*)	Casing type(*)
Delete	0	17.8	8.5	2	Steel - stainless
Delete	27.8	29.8	8.5	2	Steel - stainless
Add New					

Screen						
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)	Screen diameter (in)(*)	Screen Type(*)	Screen slot size(*)
Delete	17.8	27.8	8.5	2	Steel - stainless	0.010
Add New						

Annulus fill and seal				
	Section(*)	From depth (ft)(*)	To depth (ft)(*)	Material(*)
Delete	Grout	1	13.8	Bentonite
Delete	Seal	13.8	15.8	Bentonite
Delete	Filter Pack	15.8	30.5	Sand
Add New				

Lithologic log	
	From depth (ft)(*) To depth (ft)(*) Description(*)
Add New	

Site Map/Sketch Map(*)	Browse...
Well Diagram (monitoring well)	Browse...
Coliform analysis (if applicable)	Browse...
Signed variance (if applicable)	Browse...
Other laboratory analysis report (if applicable)	Browse...
Casing/Screen Supplemental Info	Browse...
Comments	

Affirmation: I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. By submitting data, this transmission constitutes my signature and I am responsible for any and all content submitted either by me or by the people I represent.

Signature of certified driller & PIN(*)	Todd W Mills	Date Signed(*)	03/27/2013
Driller First Name(*)	Todd	Driller Last Name(*)	Mills
Certification Number(*)	0344-0454-00	Certification Company(*)	Chase Environmental Group, Inc.

Kentucky Well ID (AKGWA) Number (*)	8006-5912
Owner Well ID	MW-512
Work Start Date(*)	08/22/2012
Work End Date(*)	08/24/2012
Total depth (ft)(*)	30.5
Depth to bedrock (ft)	
Static water level (ft)	
SWL method(*)	Undetermined
Casing height above surface (in)	

WATER WELLS ONLY

Estimated well yield	
Well Yield Method	
Well service (# of people served)	
Disinfectant amount	
Disinfectant type	
Pitless adapter installed	
Pump installed	
Depth to intake (ft)	

Apparent quality and odor:

Appearance	
Odor Type	
Odor - Level	

Coliform Test


Coliform test type	
Coliform test results	or # colonies per 100 ml
Date Sampled	
Date Analyzed	

[Save For Future Retrieval](#) [Submit to DEP](#)

MONITORING WELL CONSTRUCTION LOG

Location Name: Paducah Gaseous Diffusion Plant
 Address: 5600 Hobbs Road
 City/State/Zip: West Paducah, KY 42053


State Assigned # 8006-5914, 8006-5915, 8006-5916
 Agency Interest # 3059
 Facility Assigned # MW-514, MW-515, MW-516

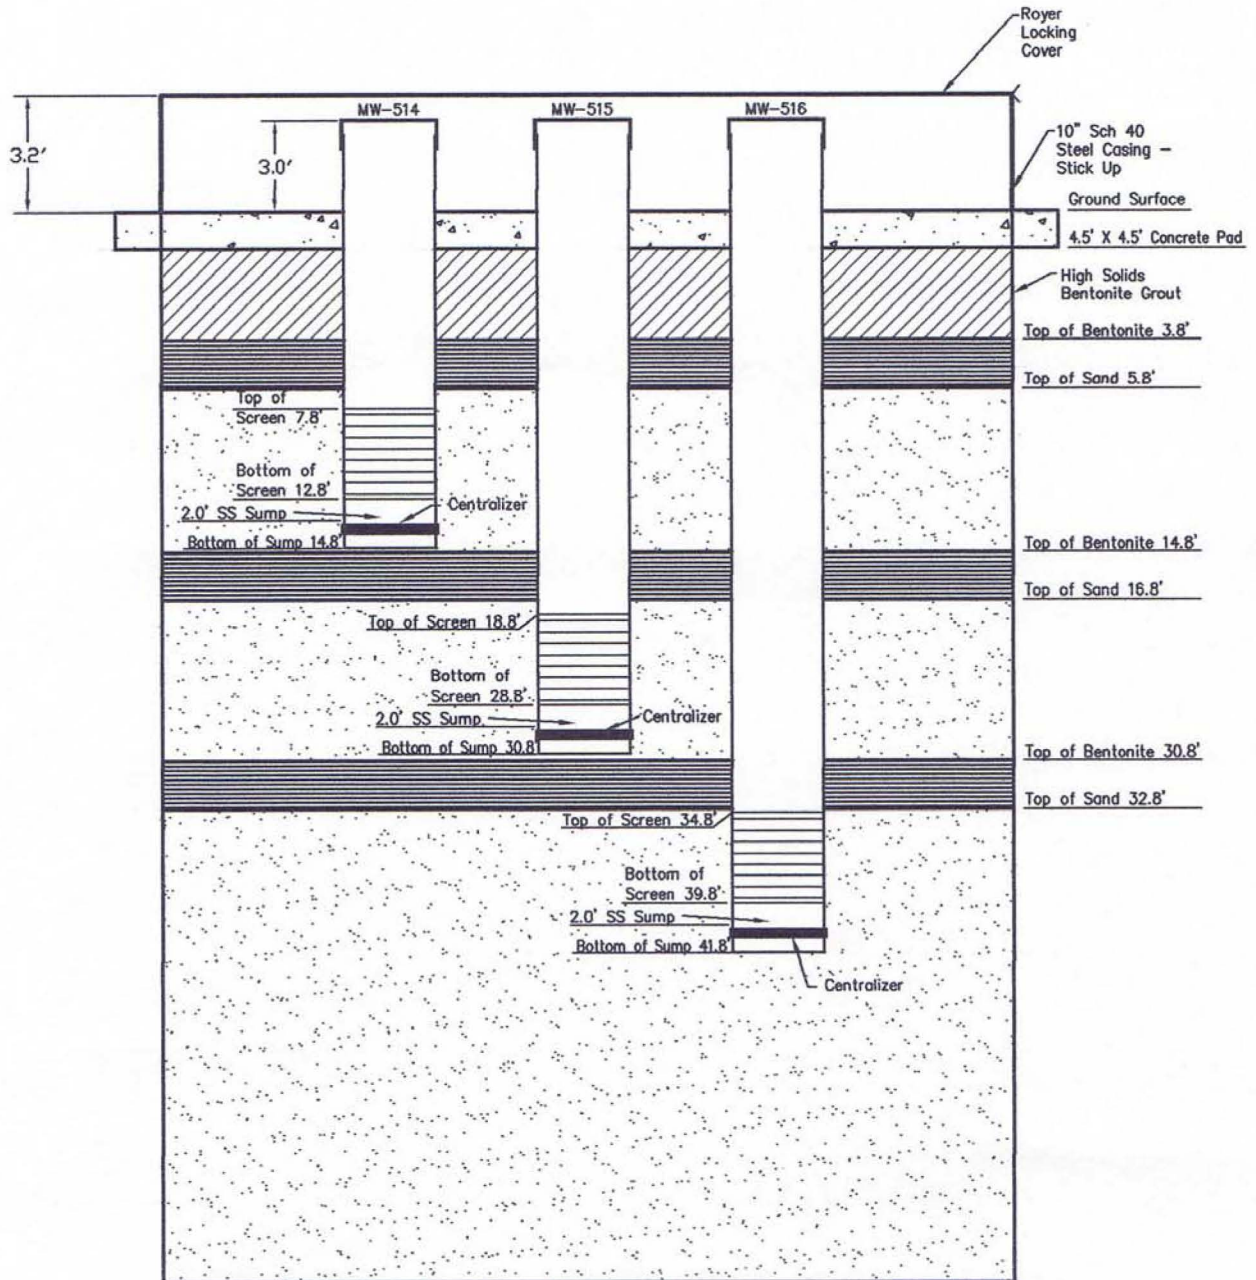

ceg CHASE
 Environmental Group INC

Comments: Drawing not to scale.

2009230

						<h1>Soil Boring Log</h1>	Page 1 of 1
Project: Southwest Plume RDSI						Boring Location: MW-514/MW-515/MW-516	
Date Drilled: 8/23/12						Sampling Method: Dual Tube	
Date Completed: 8/27/12						Surface Elevation:	
Drilling Method: 8.25" ID HSAs						Total Depth: 44.5	
Drilling Company: Chase Environmental Group						Logged By: Ken Davis, LATA of Kentucky	
DEPTH <i>feet</i>	SAMPLE NUMBER	BLOW COUNT 6"	PID ppm	REC	FORMATION	GEOLOGIC DESCRIPTION	
0.0						Unclassified Select Fill	
2.5						Light Gray SILT, Firm, Moist	
16.5						Light Gray to Reddish Yellow Gravely to Silty SAND, Dense, Moist	
21.3						Reddish Yellow to White Silty Fine SAND, Firm, Moist	
25.9						Reddish Yellow to Pale Brown Silty Fine SAND and Gravel, Dense, Moist	
37.4						Pale Brown to Pink SILT, Soft, Moist	
44.5						No Refusal – Boring Terminated @ 44.5 in SILT As Above.	

Drilling & Remedial Action Contractors
 9470 Hwy. 60 West – Kevil, Kentucky 42053
 270-488-2584 Fax: 270-488.2586

UNIFORM KENTUCKY WELL CONSTRUCTION RECORD

Use this form to report installation of monitoring or water wells.

Form must be completed and submitted to the Division of Water within 60 days of well completion.

See instructions below.

One copy to owner and one copy to driller's files.

Owner Name(*)	United States Department of Energy		
Owner First Name(*)	NA	Owner Last Name(*)	NA
Owner Address(*)	5600 Hobbs Road		
Owner City(*)	West Paducah	State(*)	Kentucky
Owner Zip(*)	42086		
Owner Phone(*)	270-441-6800	Owner eMail	

Site Name(*)	Paducah Gaseous Diffusion Plant		
Site Address(*)	5600 Hobbs Road		
Site City(*)	West Paducah	State(*)	Kentucky
Site Zip(*)	42086		
Site Phone	270-441-6800	Site eMail	
Well Latitude(*)	37.112	Well Longitude(*)	-88.815
Method(*)	Map Grade GPS - Differentially Corrected		

Agency Interest (AI) Number	3059	Facility Type & ID	CERCLA
USGS Topo Map(*)	HEATH	County(*)	McCracken
Surface elevation (ft)	370	Elevation determined by	Topographic map interpolation - digitized
Physiographic Region(*)	Jackson Purchase	Well Use(*)	Monitoring well - compliance
Drilling Method(*)	Auger - hollow stem	Well Status(*)	active
Wellhead(*)	Locking Cap	Well Condition(*)	Functioning properly

Casing / Open Borehole					
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)	Casing diameter (in)(*)	Casing type(*)
Delete	0	7.8	12.5	2	Steel - stainless
Delete	12.8	14.8	12.5	2	Steel - stainless
Add New					

Screen					
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)	Screen diameter (in)(*)	Screen Type(*)
Delete	7.8	12.8	12.5	2	Steel - stainless
Add New					

Annulus fill and seal				
	Section(*)	From depth (ft)(*)	To depth (ft)(*)	Material(*)
Delete	Grout	1	3.8	Bentonite
Delete	Seal	3.8	5.8	Bentonite
Delete	Filter Pack	5.8	14.8	Sand
Add New				

Lithologic log	
	From depth (ft)(*) To depth (ft)(*) Description(*)
Add New	

Site Map/Sketch Map(*)	Browse...
Well Diagram (monitoring well)	Browse...
Coliform analysis (if applicable)	Browse...
Signed variance (if applicable)	Browse...
Other laboratory analysis report (if applicable)	Browse...
Casing/Screen Supplemental Info	Browse...

Comments	This is the shallow well in a 3 well nested set.
----------	--

Affirmation: I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. By submitting data, this transmission constitutes my signature and I am responsible for any and all content submitted either by me or by the people I represent.

Signature of certified driller & PIN(*)	Todd W Mills	Date Signed(*)	03/27/2013
Driller First Name(*)	Todd	Driller Last Name(*)	Mills
Certification Number(*)	0344-0454-00	Certification Company(*)	Chase Environmental Group, Inc.

Kentucky Well ID (AKGWA) Number (*)	8006-5914
Owner Well ID	MW-514
Work Start Date(*)	08/23/2012
Work End Date(*)	08/27/2012
Total depth (ft)(*)	14.8
Depth to bedrock (ft)	
Static water level (ft)	
SWL method(*)	Undetermined
Casing height above surface (in)	

WATER WELLS ONLY

Estimated well yield	
Well Yield Method	
Well service (# of people served)	
Disinfectant amount	
Disinfectant type	
Pitless adapter installed	
Pump installed	
Depth to intake (ft)	

Apparent quality and odor:

Appearance	
Odor Type	
Odor-Level	

Coliform Test

Coliform test type	
Coliform test results	or # colonies per 100 ml
Date Sampled	
Date Analyzed	

Save For Future Retrieval

Submit to DEP

UNIFORM KENTUCKY WELL CONSTRUCTION RECORD

Use this form to report installation of monitoring or water wells.

Form must be completed and submitted to the Division of Water within 60 days of well completion.

See instructions below.

One copy to owner and one copy to driller's files.

Owner Name(*)	United States Department of Energy		
Owner First Name(*)	NA	Owner Last Name(*)	NA
Owner Address(*)	5600 Hobbs Road		
Owner City(*)	West Paducah	State(*)	Kentucky
Owner Zip(*)	42086		
Owner Phone(*)	270-441-6800	Owner eMail	
Site Name(*)	Paducah Gaseous Diffusion Plant		
Site Address(*)	5600 Hobbs Road		
Site City(*)	West Paducah	State(*)	Kentucky
Site Zip(*)	42086		
Site Phone	270-441-6800	Site eMail	
Well Latitude(*)	37.112	Well Longitude(*)	-88.815
Method(*)	Map Grade GPS - Differentially Corrected		
DMS to DD Converter			
Agency Interest (AI) Number	3059	Facility Type & ID	CERCLA
USGS Topo Map(*)	HEATH	County(*)	McCracken
Surface elevation (ft)	370	Elevation determined by	Topographic map interpolation - digitized
Physiographic Region(*)	Jackson Purchase	Well Use(*)	Monitoring well - compliance
Drilling Method(*)	Auger - hollow stem	Well Status(*)	active
Wellhead(*)	Locking Cap	Well Condition(*)	Functioning properly
Casing / Open Borehole			
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)
Delete	0	18.8	12.5
Delete	28.8	30.8	12.5
Add New			
Screen			
	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)
Delete	18.8	28.8	12.5
Add New			
Annulus fill and seal			
	Section(*)	From depth (ft)(*)	To depth (ft)(*)
Delete	Grout	1	3.8
Delete	Seal	3.8	5.8
Delete	Filter Pack	5.8	14.8
Delete	Seal	14.8	16.8
Delete	Filter Pack	16.8	30.8
Add New			
Lithologic log			
	From depth (ft)(*)	To depth (ft)(*)	Description(*)
Add New			
Site Map/Sketch Map(*)	Browse...		
Well Diagram (monitoring well)	Browse...		
Coliform analysis (if applicable)	Browse...		
Signed variance (if applicable)	Browse...		
Other laboratory analysis report (if applicable)	Browse...		
Casing/Screen Supplemental Info	Browse...		
Comments	This is the intermediate well in a 3 well nested set.		
Affirmation: I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. By submitting data, this transmission constitutes my signature and I am responsible for any and all content submitted either by me or by the people I represent.			
Signature of certified driller & PIN(*)	Todd W Mills	Date Signed(*)	03/27/2013
Driller First Name(*)	Todd	Driller Last Name(*)	Mills
Certification Number(*)	0344-0454-00	Certification Company(*)	Chase Environmental Group, Inc.

Kentucky Well ID (AKGWA) Number (*)	8006-5915
Owner Well ID	MW-515
Work Start Date(*)	08/23/2012
Work End Date(*)	08/27/2012
Total depth (ft)(*)	30.8
Depth to bedrock (ft)	
Static water level (ft)	
SWL method(*)	Undetermined
Casing height above surface (in)	

WATER WELLS ONLY

Estimated well yield	
Well Yield Method	
Well service (# of people served)	
Disinfectant amount	
Disinfectant type	
Pitless adapter installed	
Pump installed	
Depth to intake (ft)	
Apparent quality and odor:	
Appearance	
Odor Type	
Odor-Level	
Coliform Test	
Coliform test type	
Coliform test results	or # colonies per 100 ml
Date Sampled	
Date Analyzed	
Save For Future Retrieval Submit to DEP	

UNIFORM KENTUCKY WELL CONSTRUCTION RECORD

Use this form to report installation of monitoring or water wells.

Form must be completed and submitted to the Division of Water within 60 days of well completion.

See instructions below.

One copy to owner and one copy to driller's files.

Owner Name(*)	United States Department of Energy		
Owner First Name(*)	NA	Owner Last Name(*)	NA
Owner Address(*)	5600 Hobbs Road		
Owner City(*)	West Paducah	State(*)	Kentucky
Owner Zip(*)	42086		
Owner Phone(*)	270-441-6800	Owner eMail	

Site Name(*)	Paducah Gaseous Diffusion Plant		
Site Address(*)	5600 Hobbs Road		
Site City(*)	West Paducah	State(*)	Kentucky
Site Zip(*)	42086		
Site Phone	270-441-6800	Site eMail	
Well Latitude(*)	37.112	Well Longitude(*)	-88.815
Method(*)	Map Grade GPS - Differentially Corrected		

Agency Interest (AI) Number	3059	Facility Type & ID	CERCLA
USGS Topo Map(*)	HEATH	County(*)	McCracken
Surface elevation (ft)	370	Elevation determined by	Topographic map interpolation - digitized
Physiographic Region(*)	Jackson Purchase	Well Use(*)	Monitoring well - compliance
Drilling Method(*)	Auger - hollow stem	Well Status(*)	active
Wellhead(*)	Locking Cap	Well Condition(*)	Functioning properly

Casing / Open Borehole

	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)	Casing diameter (in)(*)	Casing type(*)
Delete	0	370	12.5	2	Steel - stainless
Delete	39.8	41.8	12.5	2	Steel - stainless
Add New					

Screen

	From depth (ft)(*)	To depth (ft)(*)	Borehole diameter (in)(*)	Screen diameter (in)(*)	Screen Type(*)	Screen slot size(*)
Delete	34.8	39.8	12.5	2	Steel - stainless	0.010
Add New						

Annulus fill and seal

	Section(*)	From depth (ft)(*)	To depth (ft)(*)	Material(*)
Delete	Grout	1	3.8	Bentonite
Delete	Seal	3.8	5.8	Bentonite
Delete	Filter Pack	5.8	14.8	Sand
Delete	Seal	14.8	16.8	Bentonite
Delete	Filter Pack	16.8	30.8	Sand
Delete	Seal	30.8	32.8	Bentonite
Delete	Filter Pack	32.8	44.5	Sand
Add New				

Lithologic log

	From depth (ft)(*)	To depth (ft)(*)	Description(*)
Add New			

Site Map/Sketch Map(*)	Browse...
Well Diagram (monitoring well)	Browse...
Coliform analysis (if applicable)	Browse...
Signed variance (if applicable)	Browse...
Other laboratory analysis report (if applicable)	Browse...
Casing/Screen Supplemental Info	Browse...

Comments This is the deep well in a 3 well nested set.

Affirmation: I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. By submitting data, this transmission constitutes my signature and I am responsible for any and all content submitted either by me or by the people I represent.

Signature of certified driller & PIN(*)	Todd W Mills	Date Signed(*)	03/27/2013
Driller First Name(*)	Todd	Driller Last Name(*)	Mills
Certification Number(*)	0344-0454-00	Certification Company(*)	Chase Environmental Group, Inc.

Kentucky Well ID (AKGWA) Number (*)	8006-5916
Owner Well ID	MW-516
Work Start Date(*)	08/23/2012
Work End Date(*)	08/27/2012
Total depth (ft)(*)	44.5
Depth to bedrock (ft)	
Static water level (ft)	
SWL method(*)	Undetermined
Casing height above surface (in)	

WATER WELLS ONLY

Estimated well yield	
Well Yield Method	
Well service (# of people served)	
Disinfectant amount	
Disinfectant type	
Pitless adapter installed	
Pump installed	
Depth to intake (ft)	

Apparent quality and odor:

Appearance	
Odor Type	
Odor-Level	

Coliform Test

Coliform test type	
Coliform test results	or # colonies per 100 ml
Date Sampled	
Date Analyzed	

Save For Future Retrieval

Submit to DEP

APPENDIX B

THREE-DIMENSIONAL CONTAMINATION MODELS (CD)

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX B

**THREE-DIMENSIONAL
CONTAMINATION MODELS (CD)**

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX C
MODEL SENSITIVITY ANALYSES

THIS PAGE INTENTIONALLY LEFT BLANK

C.1. SWMU 211-A TCE VOLUME ESTIMATE AND SENSITIVITY ANALYSIS OF ANISOTROPY, MEASURES OF STATISTICAL CONFIDENCE USING HISTORIC (1998 AND 2004) UPPER CONTINENTAL RECHARGE SYSTEM SOIL INVESTIGATION, AND 2012 REMEDIAL DESIGN SUPPORT INVESTIGATION DATA SETS

C.1.1 PURPOSE

Utilizing the results of soil sampling data provided by LATA Environmental Services of Kentucky, LLC, (LATA Kentucky) Geosyntec has developed estimates of the mass of trichloroethene (TCE) in soils above the Regional Gravel Aquifer (RGA) at Solid Waste Management Unit (SWMU 211-A) 211-A, using C Tech's Environmental Visualization Software (EVS). Provided soil sampling data was collected during evaluation of the Upper Continental Recharge System (UCRS) (1998 and 2004) and Remedial Design Support Investigation (RDSI) (2012) sampling from October 2012 to March 2013. The purpose of this calculation package is to evaluate the sensitivity of TCE mass estimates when interpolating the data using a kriging algorithm by varying the anisotropy of the model and evaluating the statistical confidence of the interpolation.

C.1.2 METHODS


Soil sampling results were interpolated in EVS in order to estimate the volume of TCE in soils. A sensitivity analysis was performed to evaluate the volume of TCE under several different anisotropy ratios: 1, 1.5, 5, and 10. EVS allows for further evaluation of the statistical confidence of the interpolation by providing results at differing user-defined confidence levels. Data were evaluated at 50, 60, 70, 80, and 90% confidence intervals, the results of which are provided in the calculation packages in Appendix C. A site-specific soil density of 1.4 gm/cc was used to calculate TCE mass.

Anisotropy allows the model to consider the effects of anisotropy in the conductivity of soil matrices to fluid flow. In most cases, geologic materials are deposited with platy clay minerals oriented horizontally; thus, flow of water in both the saturated and unsaturated zone can be slower in the vertical direction than in the horizontal direction. Ore deposition also can occur along horizontal or vertical fault or fracture systems. Chemical constituents being transported with flowing fluids, therefore, may show a larger degree of spreading in one or the other direction. The Horiz./Vert. Anisotropy Ratio allows the kriging algorithm to specify a factor to be used to apply biased weighting on data points in horizontal and vertical directions away from a given model node. The default value for fluid flow is 10, which allows data points in a horizontal direction away from a model node to influence the kriged value at that node by a factor of 10 than data points an equal distance away in a vertical direction. A value of 10 typically would be appropriate for dissolved-phase concentrations in an aquifer that is either high-velocity or anisotropic. When the property being modeled is not related to fluid flow or other processes that might be affected by matrix anisotropy, then the recommended value is 1 (i.e., isotropic). Based on observations of data from soil sampling to date in SWMU 211-A, despite the fluid based nature of the release, it is expected that transport is vertically controlled more than horizontally controlled. Therefore the use of a lower anisotropy value is appropriate. Based upon the shape and connectedness of the plume to various sample points, an anisotropy of 1.5 was selected.

EVS can be used to determine the Minimum (Min) and Maximum (Max) Plume, or in this specific case, source area, using a Min-Max algorithm. The Min Plume calculates the minimum estimated size of the

source area at a user-specified confidence level. Conversely, the Max Plume calculates the maximum estimated size of the source area at a user-specified confidence level. To determine the confidence level of the interpolation, EVS first calculates the nominal value and associated standard deviation at every node in the model. For the case of Max Plume and 80% confidence, at each node, a maximum value is determined such that 80% of the time, the actual values will fall below the maximum value (for that nominal concentration and standard deviation). This process is shown below as an example directly from the C Tech Help Manual for the case of an assumed nominal value of 10 ppm with a standard deviation of 1.1 (log units). For this case, the maximum value at that node would be approximately 84 ppm. This process is repeated for every node in the model.

For the plot shown below (from the C Tech Help Manual), the entire left portion of the bell curve is shaded. If assessing the minimum value, it would be the right side.

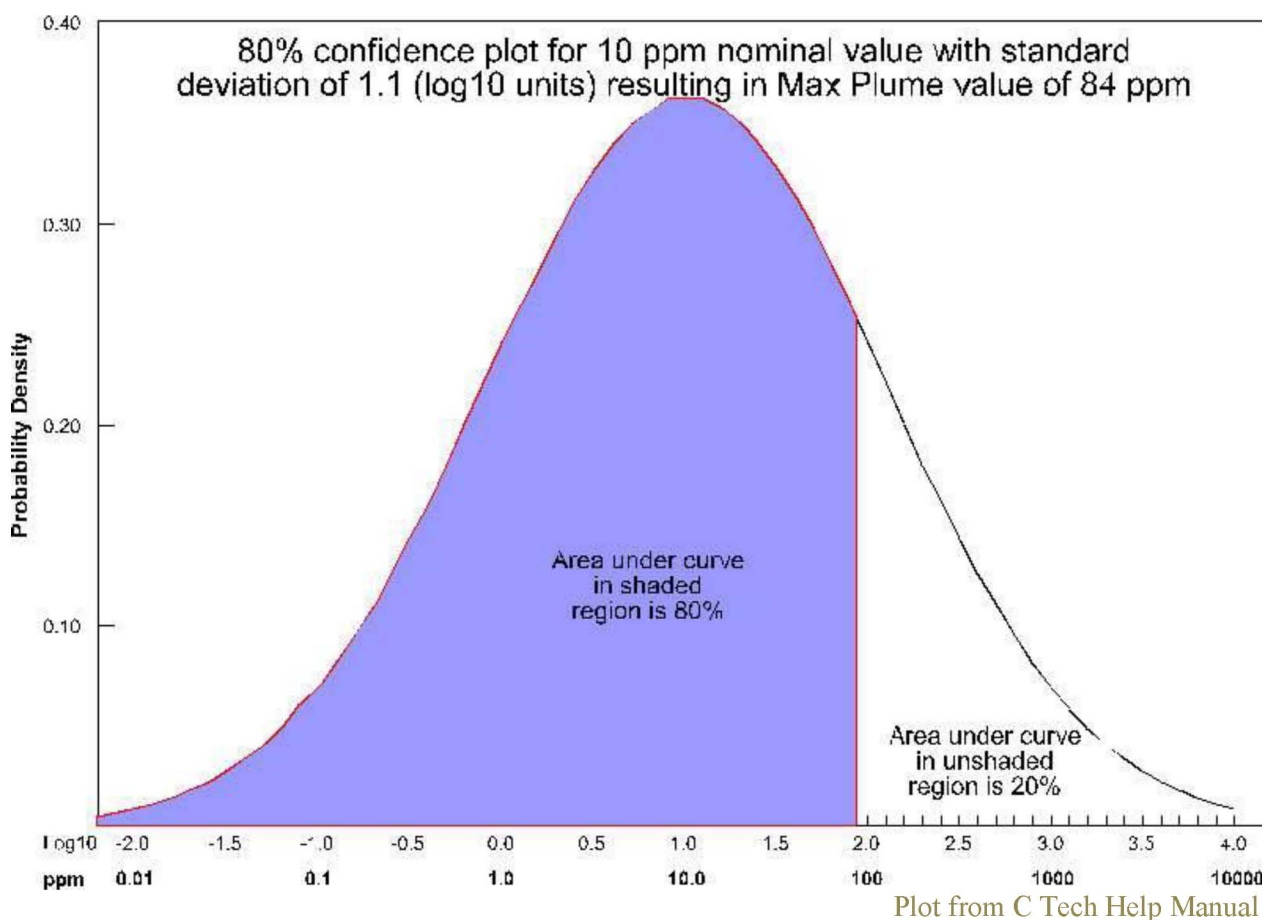

EVS allows the model to be gridded using several different techniques including convex hull (the default method) and rectilinear gridding. The convex hull of a set of points in two-dimensional space is the smallest convex area containing the set. In the x-y plane, the convex hull can be visualized as the shape assumed by a rubber band that has been stretched around the set and released to conform as closely as possible to it. EVS grids convex hull regions with quadrilaterals. Smoothing techniques are used to create a grid that has reasonably equal area cells. In rectilinear (a.k.a. uniform) gridding, the grid axes are parallel to the coordinate axes and the cells are always rectangular in cross-section. The positions of all the nodes can be computed knowing only the coordinate extents of the grid (minimum and maximum x, y, and z). In both convex hull and rectilinear gridding, adaptive gridding was used. Adaptive gridding is the

localized refinement of a grid to provide higher resolution in the areas or volumes surrounding measured sample data.


C.1.3 RESULTS




The table below provides the results of the volume estimates in gallons (gal) using the different datasets. The blue shading highlights the 50% nominal source volume estimate and the green shading highlights the results using an anisotropy value of one, which has previously been reported.

Estimated Volume of TCE (gal) above 75 ug/kg in SWMU 211-A Soils

Confidence Level	Anisotropy			
	1	1.5	5	10
90% - Max Plume	1.5	2.2	3	2.8
80% - Max Plume	1	1.5	2.1	1.9
70% - Max Plume	0.8	1.1	1.6	1.5
60% - Max Plume	0.6	0.9	1.2	1.2
50% - Nominal	0.5	0.7	1	0.9
60% - Min Plume	0.4	0.6	0.8	0.8
70% - Min Plume	0.3	0.4	0.6	0.6
80% - Min Plume	0.2	0.3	0.5	0.5
90% - Min Plume	0.2	0.2	0.3	0.3
Average	0.65	0.94	1.61	2.05

The effects of anisotropy on the model can be visualized with the following cross-sections. As shown below, the higher the anisotropy is set, the more connection is seen between horizontal points and the less connection between vertical points.

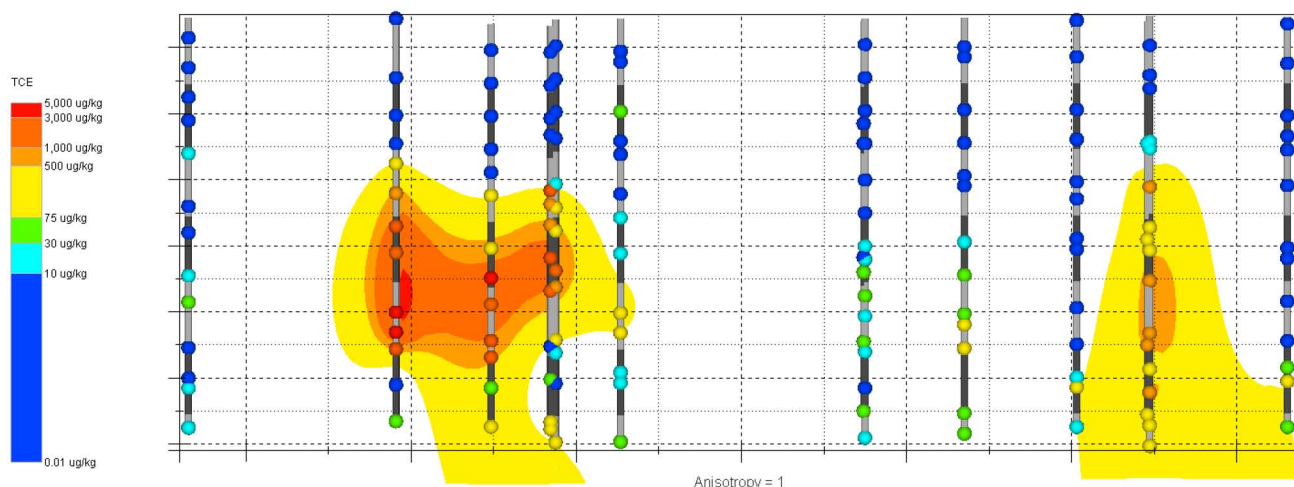

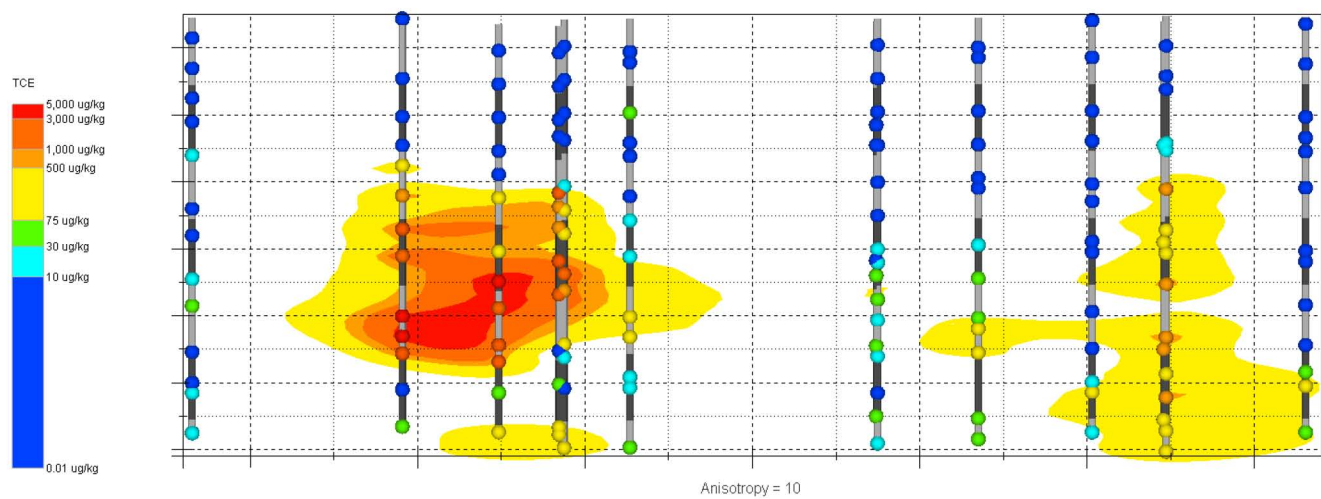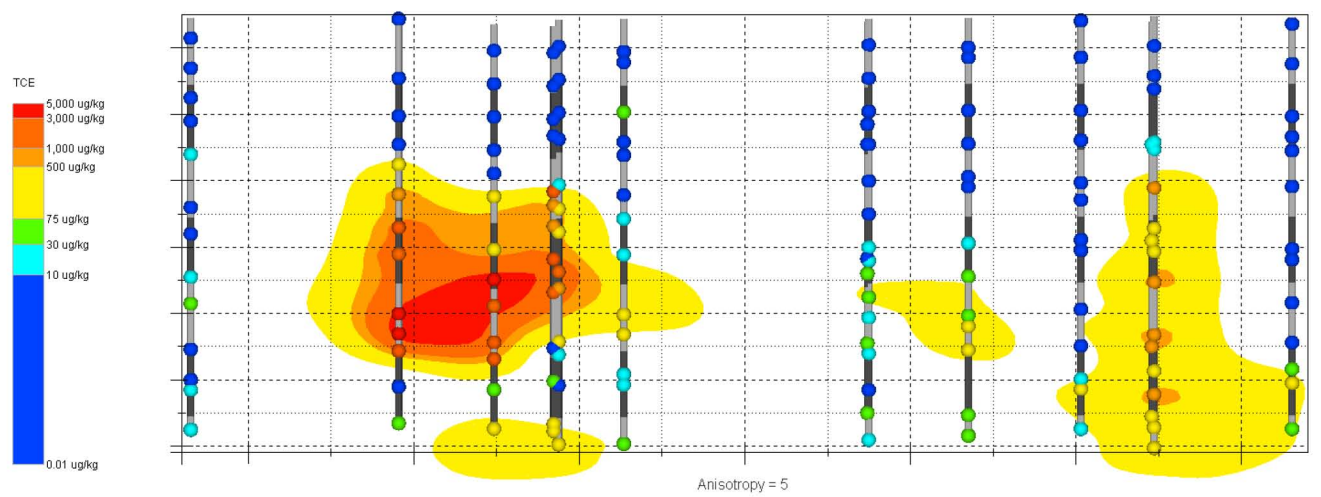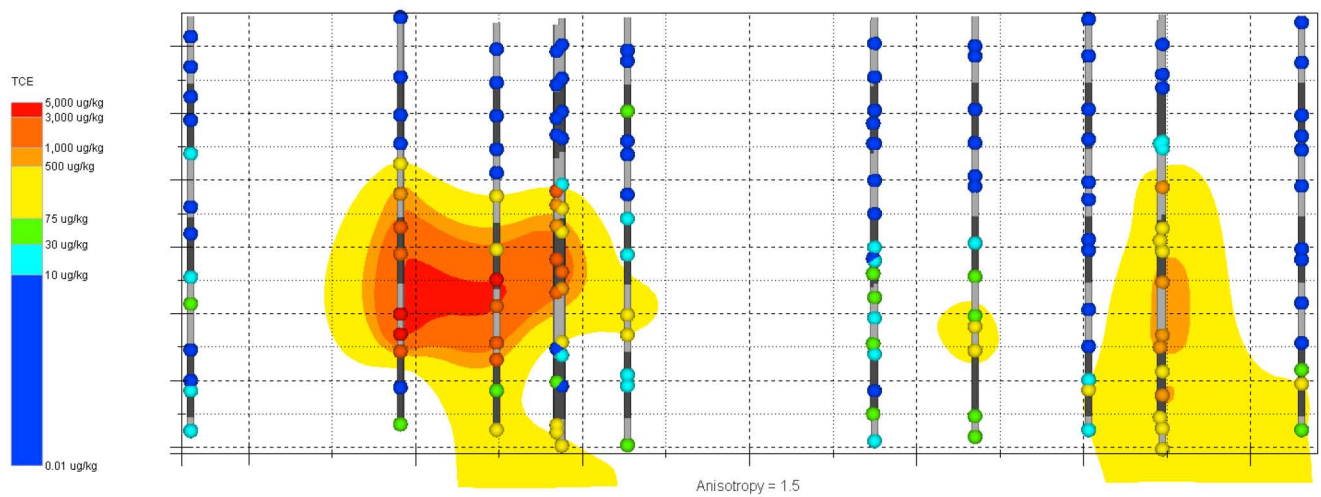

C.1.4 CONCLUSIONS

The volume of TCE in soil is sensitive to the anisotropy used to interpolate the data as well as the statistical confidence bounds placed on the interpolation. A range of TCE volumes, from 0.2 to 2.2 gal, has been estimated by using kriging using various anisotropies and confidence levels. These volumes estimates do not vary by more than one order of magnitude from the nominal estimate under isotropic conditions of 0.7 gal. Given these sensitivity analyses, the 0.7 gal value represents a reasonable nominal value based upon the review of the data, interpolation results, and professional judgment.

C.2. SWMU 211-B TCE VOLUME ESTIMATE AND SENSITIVITY ANALYSIS OF ANISOTROPY, MEASURES OF STATISTICAL CONFIDENCE USING HISTORIC (1998 AND 2004) UPPER CONTINENTAL RECHARGE SYSTEM (UCRS) SOIL INVESTIGATION AND 2012 REMEDIAL DESIGN SUPPORT INVESTIGATION (RDSI) DATASETS

C.2.1 PURPOSE

Utilizing the soil sampling data results provided by LATA Kentucky, Geosyntec has developed estimates of the mass of TCE in soils above the RGA at SWMU 211-B, using C Tech's EVS. Provided soil sampling data was collected during evaluation of the UCRS (1998 and 2004) and RDSI (2012) sampling from October 2012. The purpose of this calculation package is to evaluate the sensitivity of TCE mass estimates when interpolating the data using a kriging algorithm by varying the anisotropy of the model and evaluating the statistical confidence of the interpolation.

C.2.2 METHODS


Soil sampling results were interpolated in EVS in order to estimate the volume of TCE in soils. A sensitivity analysis was performed to evaluate the volume of TCE under several different anisotropy levels: 1, 1.5, 5, and 10. EVS allows for further evaluation of the statistical confidence of the interpolation by providing results at differing user-defined confidence levels. Data were evaluated at 50, 60, 70, 80, and 90% confidence intervals, the results of which are provided in the calculation packages in Appendix C. A site-specific soil density of 1.4 gm/cc was used to calculate TCE mass and volume.

Anisotropy allows the model to consider the effects of anisotropy in the conductivity of soil matrices to fluid flow. In most cases, geologic materials are deposited with platy clay minerals oriented horizontally; thus, flow of water in both the saturated and unsaturated zone can be slower in the vertical direction than in the horizontal direction. Ore deposition also can occur along horizontal or vertical fault or fracture systems. Chemical constituents being transported with flowing fluids, therefore, may show a larger degree of spreading in one or the other direction. The Horiz./Vert. Anisotropy Ratio allows the kriging algorithm to specify a factor to be used to apply biased weighting on data points in horizontal and vertical directions away from a given model node. The default value for fluid flow is 10, which allows data points in a horizontal direction away from a model node to influence the kriged value at that node by a factor of 10 than data points an equal distance away in a vertical direction. A value of 10 typically would be appropriate for dissolved-phase concentrations in an aquifer that is either high-velocity or anisotropic. When the property being modeled is not related to fluid flow or other processes that might be affected by

matrix anisotropy, then the recommended value is 1 (i.e., isotropic). Based on observations of data from soil sampling to date in SWMU 211-B, despite the fluid based nature of the release, it is expected that transport is vertically controlled more than horizontally controlled. Therefore the use of a lower anisotropy value is appropriate. Based upon the shape and connectedness of the plume to various sample points, an anisotropy constant of 1.5 was selected.

EVS can be used to determine the Min and Max Plume, or in this specific case, source area, using a Min-Max algorithm. The Min Plume calculates the minimum estimated size of the source area at a user-specified confidence level. Conversely, the Max Plume calculates the maximum estimated size of the source area at a user-specified confidence level. To determine the confidence level of the interpolation, EVS first calculates the nominal value and associated standard deviation at every node in the model. For the case of Max Plume and 80% confidence, at each node, a maximum value is determined such that 80% of the time, the actual values will fall below the maximum value (for that nominal concentration and standard deviation). This process is shown below as an example directly from the C Tech Help Manual for the case of an assumed nominal value of 10 ppm with a standard deviation of 1.1 (log units). For this case, the maximum value at that node would be approximately 84 ppm. This process is repeated for every node in the model.

For the plot shown below (from the C Tech Help Manual), the entire left portion of the bell curve is shaded. If assessing the minimum value, it would be the right side.

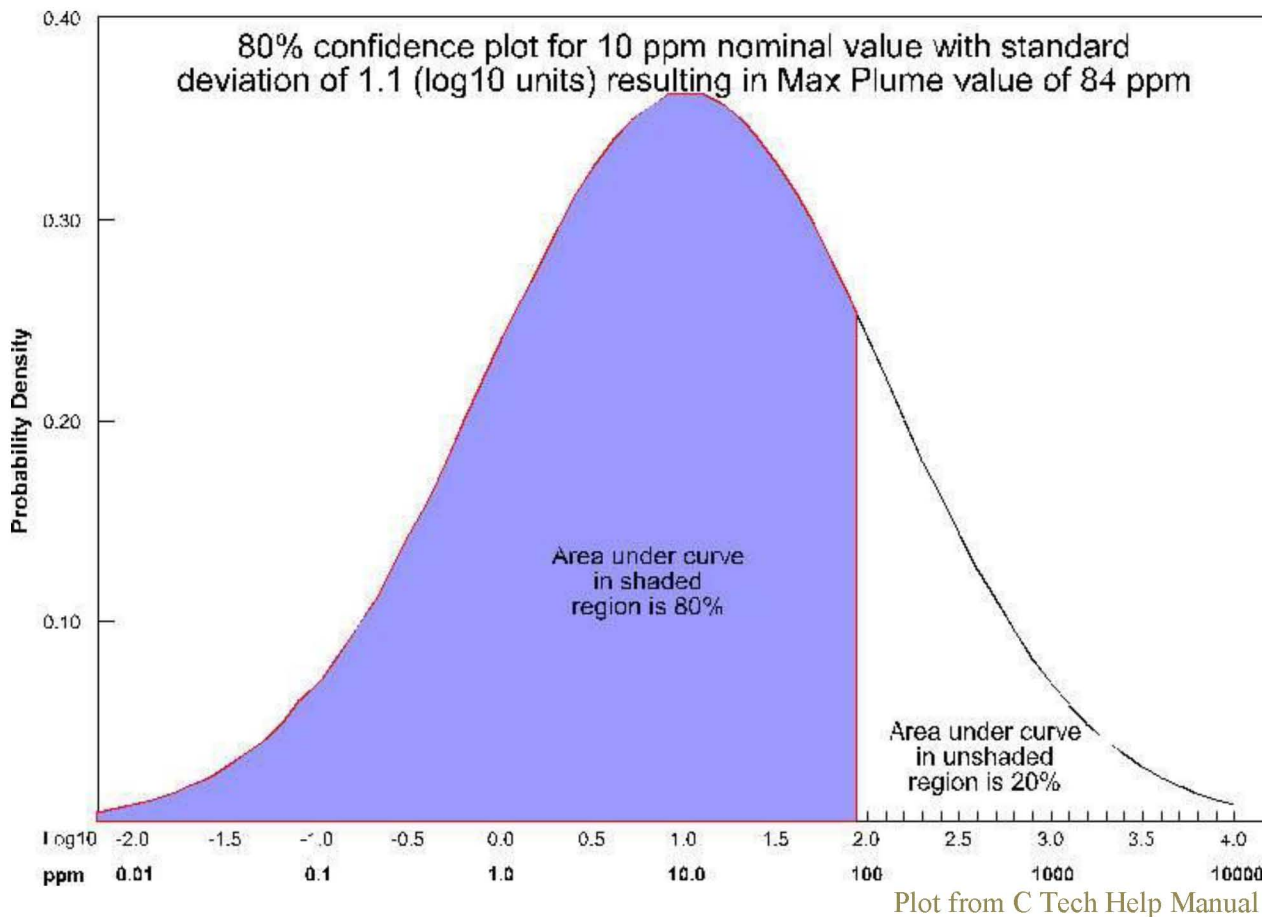

EVS allows the model to be gridded using several different techniques including convex hull (the default method) and rectilinear gridding. The convex hull of a set of points in two-dimensional space is the

smallest convex area containing the set. In the x-y plane, the convex hull can be visualized as the shape assumed by a rubber band that has been stretched around the set and released to conform as closely as possible to it. EVS grids convex hull regions with quadrilaterals. Smoothing techniques are used to create a grid that has reasonably equal area cells. In rectilinear (a.k.a. uniform) gridding, the grid axes are parallel to the coordinate axes and the cells are always rectangular in cross-section. The positions of all the nodes can be computed knowing only the coordinate extents of the grid (minimum and maximum x, y, and z). In both convex hull and rectilinear gridding, adaptive gridding was used. Adaptive gridding is the localized refinement of a grid to provide higher resolution in the areas or volumes surrounding measured sample data.



C.2.3 RESULTS


The table below provides the results of the volume estimates in gallons (gal) using the different datasets. The blue shading highlights the 50% nominal source volume estimate and the green shading highlights the results using an anisotropy value of one, which has previously been reported.

Estimated Volume of TCE (gal) above 75 ug/kg in SWMU 211-B Soils

Confidence Level	Anisotropy			
	1	1.5	5	10
90% - Max Plume	0.8	0.8	1.1	1
80% - Max Plume	0.5	0.6	0.8	0.7
70% - Max Plume	0.4	0.4	0.6	0.6
60% - Max Plume	0.3	0.3	0.5	0.5
50% - Nominal	0.3	0.3	0.4	0.4
60% - Min Plume	0.2	0.2	0.3	0.3
70% - Min Plume	0.2	0.2	0.3	0.3
80% - Min Plume	0.1	0.1	0.2	0.2
90% - Min Plume	0.1	0.1	0.1	0.2
Average	0.39	0.45	0.93	1.42

The effects of anisotropy on the model can be visualized with the following cross-sections. As shown below, the higher the anisotropy is set, the more connection is seen between horizontal points and the less connection between vertical points.

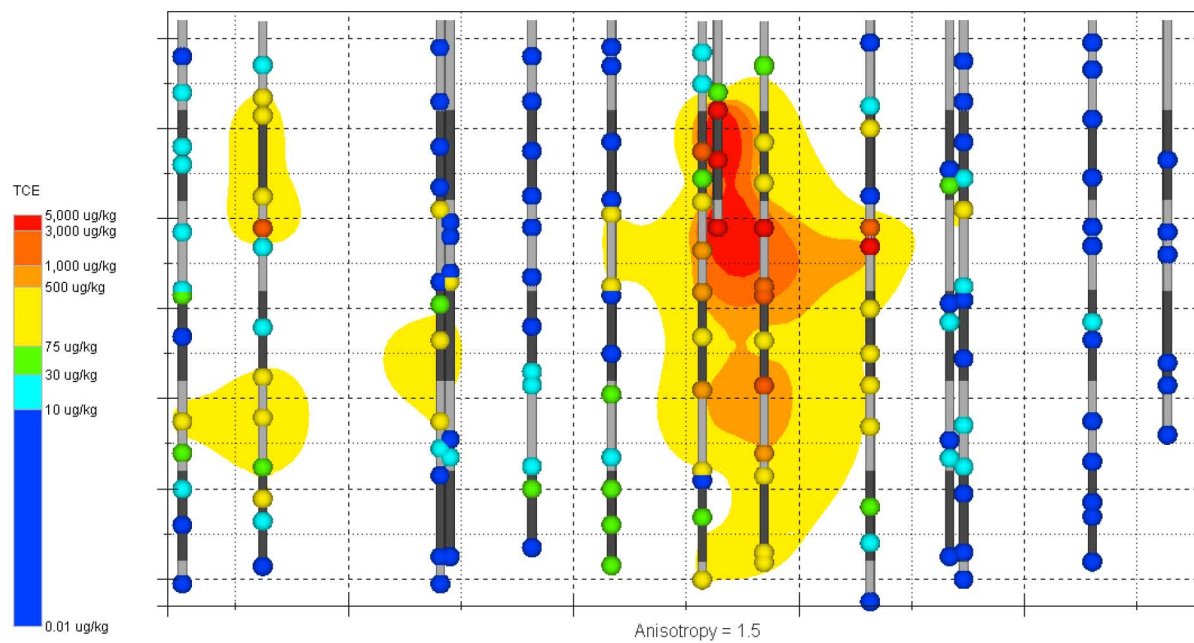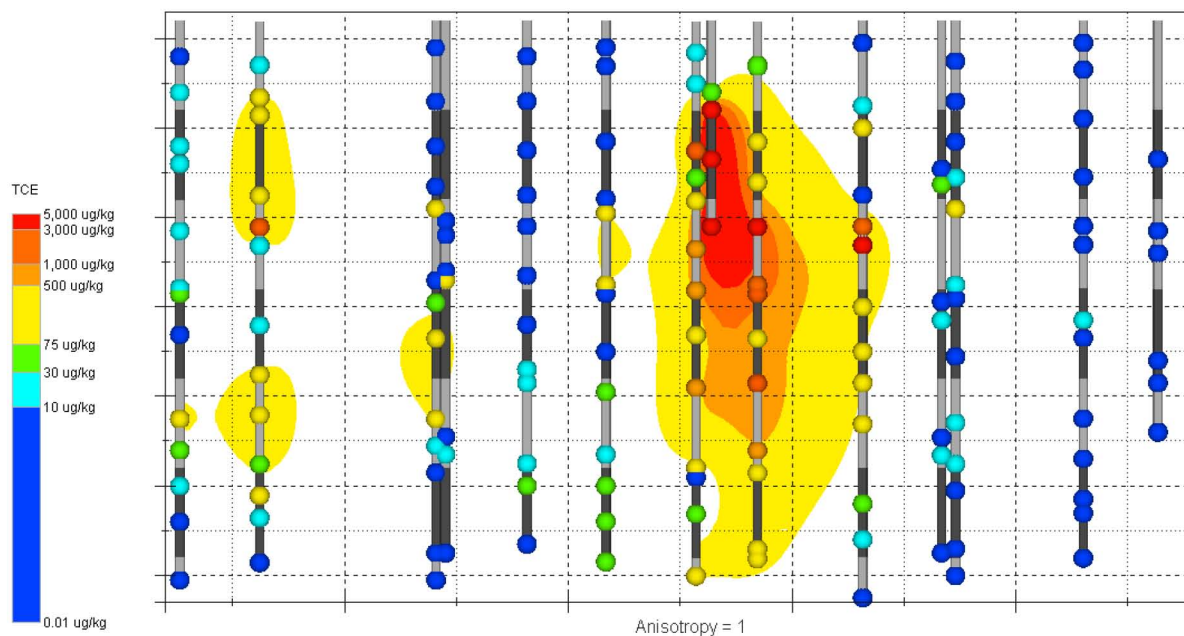

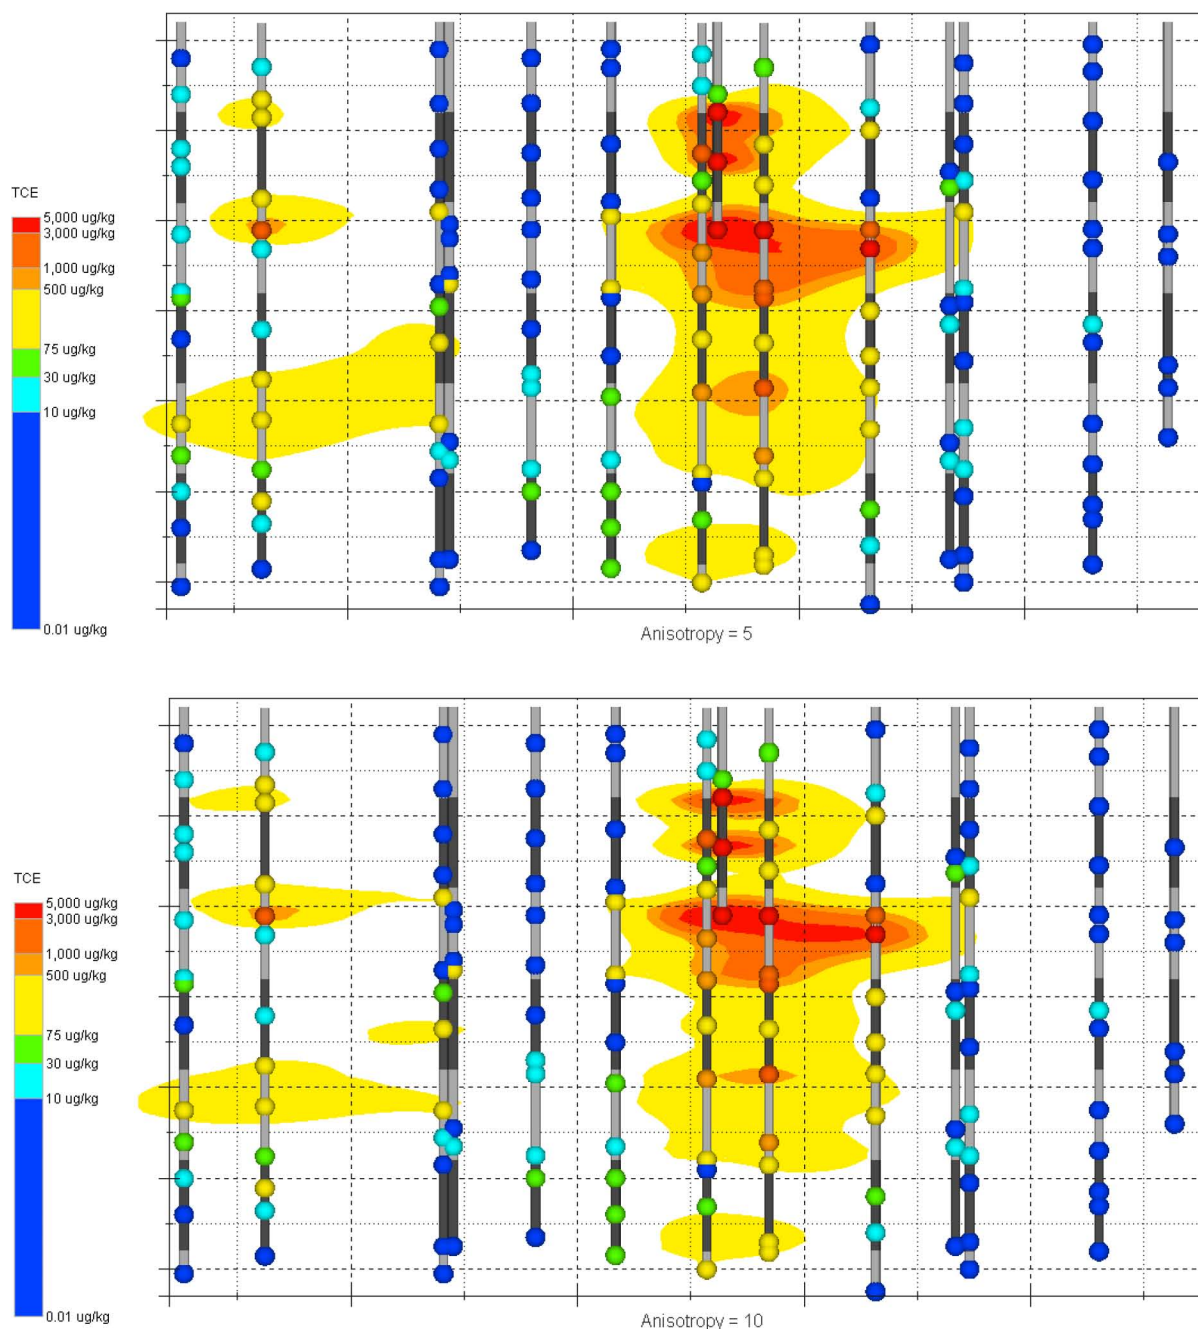

C.2.4 CONCLUSIONS

The volume of TCE in soil is sensitive to the anisotropy used to interpolate the data as well as the statistical confidence bounds placed on the interpolation. A range of TCE volumes, from 0.1 to 1.1 gal, has been estimated by using kriging using various anisotropies and confidence levels. These volumes estimates do not vary by more than an order of magnitude from the nominal estimate under isotropic conditions of 0.3 gal. Given these sensitivity analyses, the 0.3 gal value represents a reasonable nominal value based upon the review of the data, interpolation results, and professional judgment.

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX D
SOIL LITHOLOGY LOGS

THIS PAGE INTENTIONALLY LEFT BLANK

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.7	Gravel with Silt, 10YR6/4 (light yellowish brown), loose, and dry. Gravel is subangular limestone, 0.2- to 0.8-inch diameter (dense gravel aggregate/DGA)	Fill
2.7	3.5	Silt, 10YR8/2 (very pale brown) with some 10YR7/8 (yellow) mottling, moderately hard, nonplastic, and dry	HU1
3.5	14.4	Silt, 10YR7/3 (very pale brown), with some 10YR7/6 (yellow) mottling, soft, moderately plastic, and moist	
14.4	16.1	Silt, 10YR7/4 (very pale brown), moderately soft, nonplastic, and moist	
16.1	19.5	Silt, 10YR7/4 (very pale brown), with 10YR8/1 (white) mottling, soft, slightly plastic, and moist. Little gravel (rounded chert with iron patina, 0.3-inch diameter) beginning at 17.8 ft	
19.5	20.0	Silty Gravel with little Clay, 10YR6/6 (brownish yellow), dense, and moist. Gravel is subangular to subrounded chert with iron patina, 0.2- to 0.5-inch diameter	
20.0	22.5	No Recovery	HU2
22.5	23.2	Gravelly Silt, 10YR8/1 (white), moderately hard, nonplastic, and moist. Gravel is subrounded chert with and without iron patina, 0.2- to 0.4-inch diameter	
23.2	24.9	Sand, 10YR6/6 (brownish yellow), loose, and moist. Sand is fine to medium, rounded, quartz grains	
24.9	26.0	Silty Gravel, 10YR7/3 (very pale brown), dense, and moist. Gravel is subrounded chert with and without iron patina, 0.2- to 1.0-inch diameter	
26.0	29.5	Silt with little Gravel, 10YR7/1 (light gray) with frequent 10YR7/4 (very pale brown) staining, moderately soft, moderately plastic, and moist. Gravel is rounded chert without iron patina, 0.3-inch diameter	
29.5	30.1	Silt, 10YR7/4 (very pale brown), moderately hard, moderately plastic, and moist	
30.1	31.0	Silt, 10YR7/1 (light gray) with 10YR7/6 (yellow) mottling, moderately hard, slightly plastic, and moist	
31.0	32.2	Silty Sand, 10YR7/4 (very pale brown), lightly consolidated, and moist. Sand is very fine quartz grains	
32.2	33.5	Silt with Gravel, 10YR7/6 (yellow), moderately hard, slightly plastic, and moist	
33.5	34.7	Silt, 10YR6/4 (light yellowish brown), soft, slightly plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
34.7	35.5	Sand with Gravel, 10YR8/2 (very pale brown) with some 10YR6/4 (light yellowish brown) mottling, loose, and moist. Sand is very fine quartz grains. Gravel is rounded to subrounded chert without iron patina, 0.2-inch diameter	HU3
35.5	36.1	Silt, 10YR8/1 (white), soft, moderately plastic, and moist	
36.1	37.3	Silt with Sand, 7.5YR6/6 (reddish yellow) with some 7.5YR8/1 (white) mottling, moderately soft, slightly plastic, and moist. Sand is very fine quartz grains	
37.3	37.9	Silty Clay, 7.5YR7/1 (light gray), moderately hard, plastic, and moist	
37.9	44.0	Silt, 10YR7/4 (very pale brown) mottled with 10YR8/2 (very pale brown), moderately soft, slightly plastic, and moist	
44.0	50.0	Clayey Silt, 7.5YR8/1 (white) with 7.5YR7/6 (reddish yellow) mottling, moderately hard, plastic, and moist	
50.0	51.8	Silt, 7.5YR7/1 (light gray) with little 7.5YR7/6 (reddish yellow) mottling, soft to very soft, moderately plastic, and wet	
51.8	52.2	Silt with Gravel, 7.5YR7/1 (light gray) with little 7.5YR7/6 (reddish yellow) mottling, soft to very soft, moderately plastic, and wet. Gravel is rounded chert without iron patina, 0.1- to 0.2-inch diameter	
52.2	52.6	Sand, 10YR8/1 (white), loose, and moist. Sand is fine quartz grains	
52.6	57.8	Silt, 7.5YR8/1 (white) with 7.5YR7/6 (reddish yellow) mottling GRADING DOWN to 7.5YR7/4 (pink) with little 7.5YR8/1 (white) mottling, soft, moderately plastic, and moist	
57.8	59.7	Sand, 10YR8/1 (white) with some 10YR3/1 (very dark gray) staining (manganese?), loose, and very moist. Sand is fine quartz grains	HU4
59.7	60.0	Sandy Gravel, 10YR6/6 (brownish yellow), loose, and moist. Gravel is chert with iron patina, subrounded to subangular, 0.2- to 1.0-inch diameter. Sand is fine quartz grains	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.8	Silt with Gravel, 10YR7/2 (light gray), moderately hard, nonplastic, and dry. Gravel is subangular limestone, 0.3- to 1.0-inch diameter (dense gravel aggregate/DGA)	FILL
1.8	3.8	Silt, 10YR8/1 (white) with little 10YR8/8 (yellow) mottling, moderately hard, nonplastic, and dry	HU1
3.8	13.9	Silt, 10YR7/2 (light gray) with variable mottling/staining by 10YR6/6 (brownish yellow), soft, nonplastic, and moist	
13.9	16.2	Silt, 10YR7/6 (yellow), moderately hard, nonplastic, and moist	
16.2	17.4	Silt, 10YR7/1 (light gray), very soft, nonplastic, and moist	
17.4	20.0	Silt with trace Gravel, 10YR7/4 (very pale brown) mottled with 10YR7/1 (light gray), moderately soft, slightly plastic, and moist. Gravel is subrounded to subangular chert with iron patina, 0.3-inch diameter	
20.0	20.5	Clay, 10YR6/2 (light brownish gray), moderately hard, plastic, and moist	
20.5	21.7	Sandy Silt, 10YR6/6 (brownish yellow), with blebs of clay, 10YR6/2 (light brownish gray); moderately hard, slightly plastic, and moist. Sand is very fine quartz grains.	
21.7	21.9	Gravel, 10YR6/6 (brownish yellow). Gravel is rounded to subrounded chert with iron patina, 0.3- to 0.8-inch diameter	HU2
21.9	22.7	Silty Clay with some Gravel, 10YR7/2 (light gray), moderately hard, plastic, and moist. Gravel is rounded chert with iron patina, approximately 0.5-inch diameter	
22.7	25.0	Silty Sandy Gravel, 7.5YR6/6 (reddish yellow), hard, and moist. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.6-inch diameter. Sand is very fine quartz grains	
25.0	26.8	Gravelly Sand, 10YR5/6 (yellowish brown), loose, and moist. Sand is fine quartz grains. Gravel is rounded chert with iron patina, 0.2- to 0.3-inch diameter	
26.8	30.7	Silt, 10YR7/1 (light gray) with 10YR7/6 (yellow) mottling and micro-laminations, moderately plastic, soft, and moist	
30.7	31.3	Silt with some Gravel, 10YR7/1 (light gray) with 10YR7/6 (yellow) mottling and micro-laminations, moderately plastic, soft, and moist. Gravel is subrounded chert with iron patina, 4 mm- to 0.7-inch diameter	
31.3	31.8	Silt, 10YR8/4 (very pale brown) GRADING DOWN to 10YR8/1 (white), soft, slightly plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
31.8	32.5	Sand with Gravel, 7.5YR7/6 (reddish yellow), lightly consolidated, and moist. Sand is fine quartz grains. Gravel is rounded chert with iron patina, 0.2- to 1.0-inch diameter	NO RECOVERY
32.5	35.0	No recovery	
35.0	39.0	Silty Clay, 7.5YR8/1 (white) with abundant 7.5YR7/6 (reddish yellow) mottling and staining GRADING DOWN to little mottling and staining, moderately soft, plastic, and moist	HU3
39.0	40.5	Silt, 10YR8/2 (very pale brown) mottled with 10YR6/2 (light yellowish brown) and 10YR7/6 (yellow), soft, slightly plastic, and moist	
40.5	43.3	Interlensing Silty Clay and Silt, 10YR8/1 (white) with heavy mottling by 10YR6/6 (brownish yellow) and some 2.5YR7/8 (light red), moderately soft, moderately plastic, and moist	
43.3	49.6	Silty Clay, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white) GRADING DOWN to 7.5YR8/1 (white) mottled with 7.5YR7/6 (reddish yellow), moderately hard, moderately plastic, and moist	
49.6	52.9	Silt with little Clay and Sand, 7.5YR8/1 (white) with 7.5YR7/6 (reddish yellow) mottling, soft, slightly plastic, and moist. Sand is very fine quartz grains	
52.9	56.1	Silty Clay, 7.5YR8/1 (white) with abundant small mottles of 7.5YR7/6 (reddish yellow), moderately hard, moderately plastic, and moist	
56.1	58.2	Silt, 7.5YR6/6 (reddish yellow), moderately hard, slightly plastic, and moist	
58.2	60.0	Sand with some blebs of Silt, 10YR8/1 (white) with some 10YR7/6 (yellow) mottling and some small blebs of 10YR3/1 (very dark gray) (manganese?), lightly consolidated, and very moist. Sand is very fine quartz grains	HU4
60.0	60.4	Sand, 10YR8/1 (white) with few 10YR7/6 (yellow) laminations, lightly consolidated, and wet. Sand is fine quartz grains	
60.4	60.9	Gravelly Sand, 10YR8/2 (very pale brown), loose, and wet. Sand distribution is bimodal: 70% fine quartz grains and 30% coarse to very coarse, subrounded to rounded, chert grains (with and without iron patina). Gravel is rounded to subrounded chert with iron patina, 4 mm- to 0.8-inch diameter	
60.9	62.5	Sandy Gravel, 10YR6/4 (light yellowish brown), loose, and wet. Gravel is rounded to subrounded chert with iron patina, 0.2- to 0.8-inch diameter. Sand distribution is bimodal, 65% fine to medium quartz grains and 35% coarse, subangular, chert grains	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.2	Silt, 10YR6/1 (gray), loose, and dry. Humic material and root zone	Fill
0.2	0.5	Gravelly Silt, 10YR7/1 (light gray), loose (powder), nonplastic, and dry. Gravel is subangular to rounded chert, 0.2- to 1.0-inch diameter	
0.5	2.2	Silt with some Gravel, 10YR7/4 (very pale brown), moderately hard, nonplastic, and slightly moist	
2.2	3.2	Silt, 10YR8/1 (white) with little 10YR7/6 (yellow) mottling, hard, nonplastic, and slightly moist	HU1
3.2	16.4	Silt, 10YR8/2 (very pale brown) with variable mottling by 10YR6/6 (brownish yellow), soft, nonplastic, and moist	
16.4	20.1	Slightly Clayey Silt, 10YR6/4 (light yellowish brown) with 10YR6/1 (gray) mottling, moderately hard, nonplastic, and slightly moist	
20.1	24.0	Silty Sand with Gravel, 7.5YR6/6 (reddish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with light iron patina, 4 mm- to 0.4-inch diameter	HU2
24.0	25.0	Silt with little Gravel, 10YR8/2 (very pale brown), soft, slightly plastic, and moist. Gravel is subrounded chert without iron patina, 0.2- to 0.4-inch diameter	
25.0	25.5	Sand with some Gravel, 10YR7/4 (very pale brown), lightly consolidated, and moist. Sand is 70% fine quartz grains and 30% coarse, rounded, chert grains. Gravel is subangular chert with iron patina, 0.4-inch diameter	
25.5	26.3	Sand, 5YR7/6 (reddish yellow), lightly consolidated, and moist. Sand is very fine quartz grains	
26.3	28.2	Silty Sand with Gravel as 20.1 to 24.0 ft	
28.2	30.0	Silty Sand, 10YR8/1 (white) mottled with 10YR7/6 (yellow), firm/moderately soft, nonplastic, and moist. Sand is very fine quartz grains	
30.0	36.1	Silty Gravelly Sand, 7.5YR6/5 (reddish yellow), firm to soft, nonplastic, and moist to very moist. Sand size ranges from fine to coarse grains. Gravel is subangular chert, 0.5- to 1.2-inch diameter	
36.1	39.2	Sandy Silt, 7.5YR6/8 (reddish yellow) with some mottling by 7.5YR6/1 (gray), soft to very soft, plastic, and very moist	
39.2	40.0	Silt, 7.5YR7/3 (pink) with 7.5YR8/1 (white) banding, stiff to firm, and slightly moist	
40.0	40.9	Clay with little Silt, 7.5YR6/8 (reddish yellow) mottled with 10YR7/1 (light gray), very stiff to stiff, nonplastic, and slightly moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
40.9	42.9	Sandy Silt, 7.5YR7/6 (reddish brown) with 10YR7/1 (gray) and 7.5YR5/8 (strong brown) mottling, stiff to firm, and slightly moist		HU3
42.9	45.0	Sandy Silt, 7.5YR6/8 (reddish yellow) with some 10YR7/1 (light gray) mottling, very firm to firm, and slightly moist. Sand is very fine quartz grains		
45.0	48.4	Clayey Sandy Silt, 7.5YR7/8 (reddish yellow) with slight mottling by 10YR7/1 (light gray) in sections and some 7.5YR5/8 (strong brown) speckling throughout, very firm, nonplastic, and slightly moist		
48.4	49.8	Clayey Silt with very little Sand, 10YR7/1 (light gray) with some 7.5YR6/8 (reddish yellow) mottling, firm, and slightly moist. Sand is very fine quartz grains		
49.8	51.9	Silty Sand, 10YR7/6 (yellow), firm, and slightly moist. Sand is very fine quartz grains		
51.9	52.5	Silty Sand, 10YR7/1 (light gray), firm to very firm, and slightly moist. Sand is mostly very fine quartz grains but with trace of coarse, white, chert grains		
52.5	54.0	Silty Sand, 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains		
54.0	55.0	Sandy Silty Clay, 10YR7/1 (light gray) mottled with 7.5YR6/8 (reddish yellow), firm to stiff, and slightly moist		
55.0	55.2	Sand, 7.5YR6/8 (reddish yellow), slightly loose, and moist. Sand is very fine to fine quartz grains		
55.2	58.2	Clay, 10YR8/1 (white) mottled with 7.5YR5/6 (strong brown), stiff to very stiff, and slightly moist		
58.2	59.7	Silty Sand, 7.5YR6/8 (reddish yellow), firm, and moist. Sand is fine quartz grains		
59.7	61.0	Sand, 10YR8/1 (white), loose, and wet/saturated		HU4
61.0	61.3	Sand with Gravel, 10YR8/1 (white), loose, and wet/saturated		
61.3	62.5	Gravelly Silty Sand, 7.5YR6/8 (reddish yellow), very firm, and moist. Gravel is subangular to subrounded chert with iron patina, 0.5- to 1.2-inch diameter		

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.6	Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	Fill
3.6	7.5	Silt, 10YR7/1 (light gray) with some 10YR7/6 (yellow) mottling, soft, nonplastic, and moist	HU1
7.5	10.0	Permeameter sample - no description	
10.0	12.5	Silt as 3.6 to 7.5 ft	
12.5	13.5	Sand, 10YR8/4 (very pale brown), dense, and moist. Sand is very fine quartz grains	
13.5	14.7	Silt, 10YR7/4 (very pale brown), soft, slightly plastic, and moist	
14.7	15.0	Silt with little Gravel and little Clay, 10YR7/2 (light gray) mottled with 7.5YR6/6 (reddish yellow), moderately hard, slightly to moderately plastic, and moist. Gravel is subangular chert without iron patina, 0.3-inch diameter	
15.0	15.5	Silt, 10YR7/2 (light gray), very soft, nonplastic, and moist. Slough	
15.5	17.2	Silt with little Clay and little Gravel, 7.5YR7/2 (pinkish gray) with 7.5YR7/6 (reddish yellow) staining, moderately hard, moderately plastic, and moist. Gravel is subrounded to subangular chert without iron patina, 0.3- to 1.0-inch diameter	
17.2	17.5	Sand with Gravel, 7.5YR7/4 (pink), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.4- to 0.6-inch diameter	
17.5	20.0	Permeameter sample - no description	
20.0	21.1	Silt with little Clay and little Gravel as 15.5 to 17.2 ft	HU2
21.1	23.8	Sand with Gravel, 7.5YR7/4 (pink), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert without(?) iron patina, 0.3- to 0.5-inch diameter	
23.8	24.2	Sand, 7.5YR7/4 (pink), firm, and moist. Sand is fine to medium quartz grains	
24.2	24.6	Silt with some Gravel, 10YR7/1 (light gray) with 7.5YR7/6 (reddish yellow) staining, soft, plastic, and moist. Gravel is subrounded chert without(?) iron patina, 1.0-inch diameter	
24.6	26.0	Sand, 10YR8/2 (very pale brown) GRADING DOWN to 10YR8/4 (very pale brown), dense, and moist. Sand is fine quartz grains	
26.0	26.5	Gravelly Sand with Silt, 10YR7/6 (yellow), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.3- to 0.6-inch diameter	
26.5	28.5	Silt with Sand, 10YR7/4 (very pale brown) mottled with 10YR8/1 (white), soft, nonplastic, and moist. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
28.5	30.0	Sand with Gravel, 10YR8/3 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 4 mm- to 0.6-inch diameter	HU3
30.0	31.9	Sand with Gravel and some Silt, 7.5YR6/6 (reddish yellow). Sand is 80% fine to medium quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded to subangular chert without (?) iron patina, 4 mm- to 0.5-inch diameter	
31.9	32.7	Silt with Clay, 7.5YR6/6 (reddish yellow), moderately soft, plastic, and moist	
32.7	42.4	Silt, 7.5YR6/6 (reddish yellow) GRADING DOWN to 10YR7/6 (yellow) and then to 10YR8/3 (very pale brown) (over 41.0 to 42.4 ft), soft, slightly plastic, and moist	
42.4	50.0	Silt with little Clay, 7.5YR8/4 (pink) with some 7.5YR7/6 (reddish yellow) mottling, moderately soft, plastic, and moist	
50.0	52.1	Silt with Sand, 10YR8/1 (white) with 10YR8/6 (yellow) laminations, soft, nonplastic, and moist. Sand is fine quartz grains	
52.1	54.6	Silt with Sand, 5YR8/2 (pinkish white), soft, nonplastic, and moist. Sand is very fine quartz grains	
54.6	55.4	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is very fine to fine quartz grains	
55.4	56.8	Silt with Sand, 10YR7/6 (yellow) mottled with 10YR8/1 (white), soft, nonplastic, and moist. Sand is fine quartz grains	
56.8	57.5	Silt with some Clay, 7.5YR7/3 (pink) mottled with 7.5YR8/1 (white), moderately hard, slightly plastic, and moist	
57.5	61.0	Silt with Sand, 7.5YR8/1 (white) mottled with 5YR6/6 (reddish yellow), soft, nonplastic, and moist. Sand is fine quartz grains	
61.0	64.6	Sand, 10YR8/3 (very pale brown), loose, and wet. Sand is fine quartz grains	HU4
64.6	65.0	Sand with Gravel, 10YR8/2 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 1.0-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.3	Root zone and humic-rich soil, 10YR4/1 (dark gray)	Fill
0.3	0.8	Silty Gravel (dense gravel aggregate/DGA), 10YR7/1 (light gray), loose, and moist. Gravel is subangular to subrounded limestone, 4-mm to 0.3-inch diameter	
0.8	1.4	Silt with Gravel (fill), 10YR7/3 (very pale brown), soft, nonplastic, and moist. Gravel is rounded chert with iron patina, 0.7- to 1.0-inch diameter	
1.4	2.5	Silt with Gravel (fill) as 0.8 to 1.4 ft but interbedded 10YR5/1 (gray) and 10YR8/1 (white)	
2.5	15.2	Silt, 10YR8/2 (very pale brown) with 10YR6/6 (brownish yellow) mottling and few 10YR4/1 (dark gray) laminations, soft, nonplastic, and moist	HU1
15.2	16.5	Sand, 7.5YR7/6 (reddish yellow), lightly consolidated, and moist. Sand is fine quartz grains	HU2
16.5	18.7	Sand with some Gravel, 7.5YR7/6 (reddish yellow), lightly consolidated, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.5 to 0.8-inch diameter	
18.7	21.5	Slightly Clayey Silt, 10YR7/1 (light gray) with some 10YR7/6 (yellow) mottling, moderately hard, slightly plastic, and moist	
21.5	23.5	Gravel with Silt, 10YR7/1 (light gray) GRADING DOWN to 10YR5/6 (yellowish brown), hard, and moist. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.8-inch diameter	
23.5	27.5	Sand with Gravel to Gravelly Sand, 10YR7/4 (very pale brown) with some 10YR8/1 (white) laminations, lightly consolidated and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert with iron patina, 0.3- to 1.0-inch diameter	
27.5	35.2	Gravelly Sand, 10YR8/3 (very pale brown) mottled with 10YR8/1 (white), lightly consolidated, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.2- to 0.8-inch diameter	
35.2	39.6	Slightly Clayey Silt, 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft, slightly-to-moderately plastic, and moist	
39.6	42.5	Silty Sand, 7.5YR8/1 (white) heavily mottled with 7.5YR7/6 (reddish yellow), lightly consolidated/soft, nonplastic, and moist. Sand is very fine quartz grains	
42.5	48.4	Slightly Clayey Silt, 7.5YR7/6 (reddish yellow) with little 7.5YR8/1 (white) mottling, moderately soft, moderately plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
48.4	49.9	Silt with Sand, 7.5YR8/1 (white) mottled with 7.5YR7/6 (reddish yellow), soft, slightly plastic, and moist	HU3
49.9	52.3	Sandy Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, nonplastic, and moist	
52.3	53.4	Sand with some Gravel, 7.5YR8/6 (reddish yellow), lightly consolidated, and moist. Sand is fine quartz grains. Gravel is subangular chert with iron patina, 0.6-inch diameter	
53.4	53.8	Sand, 10YR7/6 (yellow) GRADING DOWN to 10YR8/1 (white), loose and moist. Sand is predominately (70%) fine grained but includes (30%) coarse, rounded chert grains	
53.8	54.3	Sandy Gravel with Silt, 10YR5/1 (gray) (stained with manganese?), loose, and very moist. Gravel is rounded chert with iron patina, 0.4- to 0.6-inch diameter. Sand is fine grained	
54.3	56.8	Sand with Gravel, 7.5YR8/2 (pinkish white) with 7.5YR7/6 (reddish yellow) laminations, lightly consolidated, and moist. Sand is fine quartz grains. Gravel is rounded to subangular chert with iron patina, 0.2- to 0.4-inch diameter	
56.8	58.5	Clay, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations GRADING DOWN to 2.5YR8/1 (white) with 2.5YR7/6 (light red) laminations, soft, plastic, and moist	
58.5	60.2	Silt with Sand, 2.5YR8/1 (white) with 2.5YR7/6 (light red) laminations GRADING DOWNWARD to 10YR8/1 (white), soft, very slightly plastic, and moist. Sand is very fine quartz grains	HU4
60.2	61.6	Sand, 10YR8.1 (white) with 10YR7/6 (yellow) laminations, lightly consolidated, and very moist. Sand is fine quartz grains	
61.6	62.0	Sandy Gravel, 10YR8/2 (very pale brown), loose, and very moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 4-mm to 0.6-inch diameter	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.4	Silt, 10YR5/2 (grayish brown), soft (loose), nonplastic, and moist. Zone of roots and humic material	Fill
0.4	1.7	Silt, 10YR6/3 (pale brown), soft, nonplastic, and moist. Note: some Gravel at 1.7 ft, subangular to subrounded chert with iron patina, 0.3- to 0.8-inch diameter	
1.7	16.0	Silt, 10YR8/2 (very pale brown), mottled with 10YR7/6 (yellow), soft, nonplastic, and moist	HU1
16.0	17.8	Silt, 10YR8/1 (white) with frequent thin interbeds of Sand, 10YR7/6 (yellow). Silt is soft, nonplastic, and moist. Sand is very fine quartz grains, lightly consolidated, and moist	
17.8	18.9	Sand, 7.5YR7/6 (reddish yellow), lightly consolidated, and moist. Sand is very fine quartz grains	HU2
18.9	19.8	Slightly Clayey Silt, 10YR7/3 (very pale brown) with little 10YR7/6 (yellow) mottling, soft, plastic, and moist	
19.8	21.3	Clayey Silt with some Gravel, 10YR7/2 (light gray), soft, plastic, and moist. Gravel is subrounded to rounded chert without iron patina, 0.3- to 0.5-inch diameter	
21.3	25.0	Silty Gravelly Sand, 7.5YR6/4 (light brown), dense, and moist. Sand consists of 70% fine quartz grains and 30% coarse to very coarse, subrounded, chert grains. Gravel is subangular to subrounded chert without iron patina, 0.3- to 0.4-inch diameter	
25.0	30.0	Silt, 10YR8/2 (very pale brown) mottled with 10YR8/6 (yellow), soft, moderately plastic, and moist	
30.0	32.3	Silt with Sand, 10YR7/4 (very pale brown) mottled with 10YR8/1 (white), soft, slightly plastic, and moist. Sand is fine quartz grains	
32.3	33.6	Sand, 10YR8/2 (very pale brown), lightly consolidated, and moist. Sand is very fine quartz grains	
33.6	36.7	Silty Sand with Gravel, 10YR7/4 (very pale brown), dense, and moist. Sand consists of 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded chert without iron patina, 0.4-inch diameter	
36.7	38.0	Slightly Clayey Silt, 7.5YR7/6 (reddish yellow) with 7.5YR8/1 (white) mottling, soft, plastic, and moist	
38.0	41.0	Silt with Sand, 10YR8/2 (very pale brown), soft, nonplastic, and moist. Sand is very fine quartz grains	
41.0	48.0	Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
48.0	49.0	Silt with Sand, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), moderately soft, nonplastic, and moist. Sand is very fine quartz grains		HU3
49.0	54.1	Sand, 7.5YR7/6 (reddish yellow) GRADING DOWN to 7.5YR8/1 (white), firm, and moist. Sand is very fine quartz grains		
54.1	55.3	Sand with Gravel, 10YR8/2 (very pale brown), loose, and moist. Sand is fine quartz grains. Gravel is rounded chert without iron patina, 0.3- to 0.4-inch diameter		
55.3	55.5	Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is very fine quartz grains		
55.5	57.4	Clay, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white) GRADING DOWN to 7.5YR8/1 (white) with 7.5YR7/6 (reddish yellow) laminations, moderately hard, plastic, and moist		
57.4	59.4	Silt, 7.5YR8/1 (white) with 7.5YR7/6 (reddish yellow) laminations GRADING DOWN to massive 7.5YR8/1 (white), soft, moderately plastic, and moist		
59.4	61.2	Sand, 10YR8/1 (white), loose, and wet. Sand is very fine quartz grains		HU4
61.2	62.5	Gravelly Sand, 10YR8/4 (very pale brown), loose, and wet. Sand is fine to medium, rounded, quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.7-inch diameter		

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.7	Sand with Gravel to Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is 90% fine quartz grains and 10% coarse, subrounded, chert grains. Gravel is subrounded chert with iron patina, 0.3- to 0.50inch diameter	Fill
2.7	13.1	Silt, 10YR7/1 (light gray) with some 10YR7/6 (yellow) mottling, soft, nonplastic, and moist	HU1
13.1	14.8	Interbedded Fine Sand, 7.5YR6/6 (reddish yellow), and Very Fine Sand, 7.5YR8/1 (white); firm, and moist	HU2
14.8	17.0	Gravelly Sand, 7.5YR5/6 (strong brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 4 mm- to 0.6-inch diameter	
17.0	17.7	Sand, 10YR7/6 (reddish yellow), dense, and moist. Sand is fine quartz grains	
17.7	21.3	Gravelly Sand as 14.8 to 17.0 ft	
21.3	21.7	Sand with Gravel, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.6-inch diameter	
21.7	22.3	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
22.3	26.0	Silt, 10YR8/4 (very pale brown) mottled with 10YR8/1 (white), soft, plastic to moderately plastic, and moist	
26.0	27.1	Sand with little Gravel, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
27.1	28.0	Gravelly Sand, 10YR8/1 (white) mottled with 10YR8/4 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with iron patina, 4 mm- to 0.4-inch diameter	
28.0	28.8	Sand, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains	
28.8	30.0	Sandy Gravel, 10YR8/2 (very pale brown), dense, and moist. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.6-inch diameter	
30.0	30.8	Sandy Gravel as 28.8 to 30.0 ft but with Silt	
30.8	32.4	Sandy Gravel as 28.8 to 30.0 ft	
32.4	37.0	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 7.5YR8/2 (pinkish white), soft, plastic to moderately plastic, and moist	
37.0	40.8	Silt with Clay, 7.5YR7/3 (pink) mottled with 7.5YR8/1 (white), soft, plastic, and moist	
40.8	41.7	Silt with Clay as 37.0 to 40.8 ft but very soft	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
41.7	43.0	Silt with Clay, 7.5YR7/3 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 10YR8/2 (very pale brown), moderately hard, moderately plastic, and moist		HU3
43.0	47.4	Silt with Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), moderately soft with blebs of moderately hard and blebs of soft, slightly to moderately plastic, and moist		
47.4	49.5	Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains. Note: with subrounded chert gravel with iron patina, 0.3-inch diameter, at 49.2 to 49.5 ft		
49.5	55.1	Silt with Clay, 7.5YR6/6 (reddish yellow) mottled with 7.5YR8/1 (white), moderately hard, slightly plastic, and moist		
55.1	58.0	Silt with Sand, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 10YR8/3 (very pale brown), soft, slightly plastic, and moist. Sand is fine quartz grains		
58.0	58.5	Sand, 10YR8/6 (yellow), firm, and moist. Sand is very fine quartz grains		HU4
58.5	60.2	Sand, 10YR8/4 (very pale brown), firm, and moist. Sand is fine quartz grains		
60.2	60.5	Sand with Silt and Gravel, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains. Gravel is rounded chert without iron patina, 0.3-inch diameter		
60.5	62.0	Sand with a few Silt interbeds, 10YR8/2 (very pale brown), lightly consolidated to firm, and moist. Sand is fine quartz grains		
62.0	62.1	Sandy Gravel, 10YR7/4 (very pale brown), loose, and moist. Gravel is subrounded chert with iron patina, 0.3-inch diameter. Sand is fine quartz grains		
62.1	62.5	Sand with a few Silt interbeds as 60.5 to 62.0 ft		HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.2	Silt, 10YR5/1 (gray), soft, nonplastic, and moist. Zone of roots and humic material	HU1
0.2	1.2	Silt, 10YR6/3 (pale brown), soft, nonplastic, and moist	
1.2	5.0	Silt, 10YR7/1 (light gray), hard, nonplastic, and dry	
5.0	5.9	Silt, 10YR7/1 (light gray), moderately hard, nonplastic, and moist	
5.9	17.5	Silt, 10YR8/2 (very pale brown) with 10YR6/6 (brownish yellow) mottling, soft, slightly plastic, and moist	
17.5	20.2	Silt with some Clay and Gravel, 10YR6/6 (brownish yellow) with 10YR8/2 (very pale brown) mottling, moderately soft, plastic, and moist. Gravel consists of subangular to subrounded chert without iron patina, 0.3- to 0.8-inch diameter	
20.2	21.1	Silty Sand with Gravel, 7.5YR6/6 (reddish yellow), moderately dense, and moist. Sand consists of 70% fine quartz grains and 30% medium, rounded, quartz grains. Gravel consists of subangular to subrounded chert with iron patina, 0.3- to 0.4-inch diameter	HU2
21.1	21.4	Silt, 10YR7/1 (light gray), moderately soft, nonplastic, and moist	
21.4	22.6	Silty Sand with some Gravel, 7.5YR5/6 (strong brown), moderately dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.4-inch diameter	
22.6	25.1	Silt, 10YR8/2 (very pale brown) with little 10YR7/6 (yellow) mottling, moderately hard, slightly plastic, and moist	
25.1	25.5	Sandy Gravel, 7.5YR6/6 (reddish yellow)	
25.5	28.0	Silt with trace of Gravel, 7.5YR7/6 (reddish yellow) mottled with 7.5YR7/1 (light gray), soft, slightly plastic, and moist. Gravel is rounded chert with iron patina, 1.0-inch diameter	
28.0	33.0	Silt with little Gravel, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) mottling GRADING DOWN to 10YR7/3 (very pale brown), soft, nonplastic, and moist. Gravel is rounded chert without iron patina, 0.4- to 0.8-inch diameter	
33.0	35.0	Silty Sand with Gravel, 10YR6/6 (brownish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with and without iron patina, 0.2 - to 0.6-inch diameter	
35.0	37.8	Slightly Clayey Silt, 7.5YR6/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, plastic, and moist	
37.8	42.0	Silt, 10YR7/2 (light gray) mottled with 10YR6/6 (yellow), soft, moderately plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
42.0	42.2	Sand, 10YR8/4 (very pale brown), firm, and moist. Sand is very fine quartz grains	HU3
42.2	51.6	Silty Clay, 7.5YR7/1 (light gray) mottled with 7.5YR6/6 (reddish yellow), moderately hard, moderately plastic, and moist	
51.6	52.7	Sand with little Gravel, 10YR8/1 (white) GRADING DOWN to 10YR8/4 (very pale brown), firm, and moist. Sand is very fine to fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.4- to 0.5-inch diameter	
52.7	53.5	Silty Clay as 42.2 to 51.6 ft	
53.5	54.7	Silty Sand, 10YR8/3 (very pale brown) GRADING DOWN to 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
54.7	58.8	Silt with some Clay, 10YR7/6 (yellow) with mottling/laminations of 10YR8/1 (white), moderately hard, moderately plastic, and moist	
58.8	59.9	Silt, 10YR8/4 (very pale brown) with 10YR7/6 (yellow) laminations, soft, slightly plastic, and moist	
59.9	61.8	Sand, 10YR8/4 (very pale brown), loose, and wet. Sand is very fine quartz grains	HU4
61.8	62.3	Silt, 10YR8/2 (very pale brown), soft, moderately plastic, and moist	
62.3	62.5	Sandy Gravel, 5YR5/3 (brown), loose, and wet. Gravel is subrounded to rounded chert with iron patina, 0.4- to 1.0-inch diameter. Sand is fine quartz grains	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.2	Surface soil and pea gravel	Fill
1.2	5.0	Silt, 10YR8/1 (white) with little 5YR6/8 (reddish yellow) mottling, and dry	HU1
5.0	6.5	Silt, 10YR8/1 (white) with traces of 5YR6/8 (reddish yellow), and dry to slightly moist	
6.5	10.0	Silt, 10YR8/1 (white) mottled with 5YR6/8 (reddish yellow), slightly plastic, and moist to very moist	
10.0	11.2	Silt, 10YR7/1 (light gray) mottled with 5YR6/8 (reddish yellow), firm, and moist	
11.2	12.0	Silt, 10YR7/1 (light gray), soft, slightly plastic, and moist	
12.0	12.6	Silt, 10YR7/1 (light gray), firm, slightly plastic, and moist	
12.6	13.7	Silt, 7.5YR7/8 (reddish yellow) mottled with 10YR7/1 (light gray), firm, and slightly moist	
13.7	14.5	Silt, 10YR6/1 (gray) with slight mottling by 7.5YR6/8 (reddish yellow), firm, and slightly moist	
14.5	15.0	Silt with little Sand, 10YR8/4 (very pale brown), firm, and dry to slightly moist. Sand is very fine quartz grains	
15.0	15.6	Sandy Silt, 10YR8/4 (very pale brown), firm, and slightly moist. Sand is very fine grained	
15.6	15.8	Sandy Silt, 2.5YR5/6 (red), and slightly moist. Sand ranges from fine to coarse grained and subangular	
15.8	16.5	Silt, 7.5YR6/8 (reddish yellow) mottled with 10YR7/1 (light gray), firm, and slightly moist	
16.5	17.4	Clayey Silt, 7.5YR6/8 (reddish yellow) with slight 7.5YR7/1 (light gray) mottling, firm to stiff, and slightly moist	
17.4	20.0	Clayey Silt, 10YR6/1 (gray) with some 2.5YR5/8 (red) mottling, firm, slightly plastic, and slightly moist	
20.0	20.6	Gravel with some Sand, 7.5YR6/6 (reddish yellow), loose, and moist. Gravel is subrounded to subangular chert with iron patina, 4-mm to 0.4-inch diameter	
20.6	21.2	Clay with Gravel, 7.5YR7/2 (pinkish gray), hard to moderately plastic, and slightly moist. Gravel is subrounded to rounded chert without iron patina, 0.4-inch diameter	
21.2	21.7	Sandy Gravel, 7.5YR6/6 (reddish yellow), loose, and moist. Gravel is subrounded to subangular chert with iron patina, 4-mm to 0.4-inch diameter. Sand is fine grained	
21.7	22.2	Silt, 10YR7/1 (light gray) with 10YR7/4 (very pale brown) mottling, soft, slightly plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
22.2	23.7	Sandy Gravel, 10YR7/4 (very pale brown), loose and moist. Gravel is subrounded to subangular chert with iron patina, 4-mm to 0.7-inch diameter. Sand consists of 60% fine grains and 40 % coarse, rounded, chert grains	HU2
23.7	26.4	Sand with Gravel, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with light iron patina, 0.3- to 0.8-inch diameter	
26.4	26.8	Sand with little Gravel, 10YR8/2 (very pale brown) stained with 10YR7/4 (reddish yellow), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with light iron patina, 0.3 to 0.4-inch diameter	
26.8	32.2	Silt with Sand, 10YR8/1 (very pale brown) mottled with 10YR7/6 (yellow), moderately soft, nonplastic, and moist. Sand is fine quartz grains	
32.2	33.9	Sandy Gravel, 7.5YR6/6 (reddish yellow), dense, and moist. Gravel is subangular to subrounded chert without iron patina, 0.3- to 0.8-inch diameter. Sand is fine grained	
33.9	34.1	Sand, 10YR8/1 (white), lightly consolidated, and moist. Sand is fine quartz grains	
34.1	34.6	Sandy Gravel, 10YR8/2 (very pale brown), lightly consolidated, and moist. Gravel is subangular chert with light iron patina, 0.2- to 0.4-inch diameter. Sand is fine grained	
34.6	36.3	Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/3 (pink), soft, very plastic, and moist	HU3
36.3	40.0	Slightly Clayey Silt, 7.5YR7/6 (reddish yellow) with 7.5YR8/1 (white) mottling, soft, moderately plastic, and moist	
40.0	42.4	Silt with some Sand, 10YR8/2 (very pale brown) with frequent mottling by 10YR7/6 (yellow), moderately hard, nonplastic, and moist. Sand is fine quartz grains	
42.4	47.5	Slightly Clayey Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), moderately hard to hard, slightly plastic, and moist	
47.5	51.1	Silt, 7.5YR8/1 (white) with some 7.5YR7/6 (reddish yellow) mottling, soft, moderately plastic, and moist	
51.1	51.9	Silt as 47.5 to 51.1 with Gravel. Gravel is rounded chert without iron patina, 4-mm to 0.3-inch diameter	
51.9	52.1	Gravelly Sand with "salt and pepper" texture - 10YR8/1 (white) and 10YR5/1 (gray) - loose, and moist. Sand consists of both fine grains and rounded coarse grains. Gravel is subrounded chert without iron patina, 4-mm to 0.5-inch diameter	

211-A-010

Plant North -2045.429, Plant East -5030.721

9/13/2012 & 9/17/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
52.1	55.0	Silt, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) mottling, moderately soft, nonplastic, and moist		
55.0	59.9	Silt with minor interbeds of Silt with Sand, 7.5YR8/1 (white) mottled with 7.5YR7/6 (reddish yellow), moderately hard, moderately plastic, and moist. Sand is fine quartz grains		
59.9	60.8	Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains		
60.8	61.2	Sand as 59.9 to 60.8 ft but with 7.5YR8/1 (white) and 7.5YR7/6 (reddish yellow) "beds"		HU4
61.2	62.2	Sand as 59.9 to 60.8 ft but colored 7.5YR8/4 (pink)		
62.2	62.5	Sandy Gravel, 10YR7/4 (very pale brown), loose, and moist. Gravel is subangular chert with iron patina, 4-mm to 0.8-inch diameter. Sand is fine grained		HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.2	Soil - made land - limestone gravel	FILL
1.2	2.6	Silt, 10YR7/3 (very pale brown) with some mottling by 10YR8/1 (white), loose to slightly firm, and dry to slightly moist	HU1
2.6	6.0	Silt, 10YR8/1 (white) with mottling by 10YR7/8 (yellow), slightly moist	
6.0	10.0	Silt, 10YR7/1 (light gray) mottled and speckled with 10YR6/8 (brownish yellow), firm GRADING DOWN to soft, and slightly moist to moist	
10.0	12.4	Silt, 10YR7/1 (light gray) mottled with 7.5YR6/8 (reddish yellow), soft, and slightly moist	
12.4	14.0	Silt, 10YR7/2 (light gray) speckled with 10YR7/8 (yellow), firm, and slightly moist	
14.0	15.0	Silt with little Clay, 10YR6/6 (brownish yellow) banded with 7.5YR6/6 (reddish yellow), firm, and slightly moist	
15.0	16.4	Silt with very little Sand, 10YR7/3 (very pale brown), soft to firm, and moist. Sand is very fine quartz grains	
16.4	18.0	Silt with little Clay, 10YR7/8 (yellow), firm, and moist	
18.0	19.5	Clayey Silt, 10YR7/8 (yellow), firm, slightly plastic, and moist	
19.5	20.0	Gravelly Clayey Silt, 10YR7/8 (yellow), very firm to stiff, and slightly moist. Gravel is subangular chert, 0.2- to 0.5-inch diameter	
20.0	25.0	Sandy Silt with some Gravel, 7.5YR5/8 (strong brown) mottled with 7.5YR7/1 (light gray) and 7.5YR6/1 (gray), firm, and moist. Gravel is subrounded chert, 0.2- to 0.8-inch diameter	HU2
25.0	25.7	Silty Sand, 7.5YR7/1 (light gray), firm, and very moist. Sand consists of fine and coarse grains. Coarse grains are 1- to 3-mm in diameter and colored white and rose	
25.7	27.0	Silty Sand, 7.5YR7/6 (reddish brown) with inclusions of 7.5YR8/1 (white), firm, and moist. Sand consists of fine and coarse grains. Coarse grains are 1- to 3-mm in diameter (trace subangular grains, 5- to 6-mm diameter)	
27.0	27.2	Silty Sand, 10YR8/1 (white), firm, and moist. Sand is fine quartz grains	
27.2	28.0	Gravelly Silty Sand, 7.5YR6/8 (reddish yellow). Sand is fine to coarse (1- to 4-mm diameter), subangular grains. Gravel is subangular to subrounded chert, 0.5 to 0.8-inch diameter	
28.0	30.6	Silty Sand with trace Gravel, 10YR7/1 (light gray), firm, and moist. Sand is fine quartz grains. Gravel is colored rose and white, 0.5-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
30.6	33.0	Gravelly Sand, 7.5YR6/8 (reddish yellow), semi-loose, and very moist. Sand is coarse grains (1- to 5-mm diameter). Gravel is subangular chert, 0.2- to 0.5-inch diameter	
33.0	33.4	Silty Sand with little Gravel, 10YR7/1 (light gray), firm, and moist	
33.4	35.9	Silty Gravelly Sand, 7.5YR6/6 (reddish yellow), moderately soft to firm, and moist. Gravel (10% of soil) is subangular chert, 0.2- to 1.0-inch diameter	
35.9	37.5	Sandy Silt, 7.5YR7/8 (reddish brown) with inclusions of 7.5YR7/1 (light gray), soft to firm, and moist	
37.5	39.4	Silty Clay, 7.5YR7/1 (light gray) speckled with 7.5YR3/1 (very dark gray), firm, slightly plastic to plastic, and moist	HU3
39.4	40.0	Silt, 10YR6/3 (pale brown) with zones of 10YR4/1 (dark gray), moderately soft, moderately plastic, and moist	
40.0	42.6	Silt, 10YR7/1 (light gray), soft, moderately plastic, and moist	
42.6	45.0	Very Clayey Silt, 10YR7/3 (very pale brown) mottled with 5YR5/8 (yellowish red), firm to stiff, plastic, and slightly moist	
45.0	48.0	Silt, 7.5YR5/8 (strong brown) with some 7.5YR7/1 (light gray) banding, firm, slightly plastic, and slightly moist	
48.0	49.0	Silty Clay, 7.5YR5/8 (strong brown) with 7.5YR7/1 (light gray) banding, firm, plastic, and slightly moist	
49.0	51.3	Silt with trace Sand, 10YR7/1 (light gray), soft, and very moist. Sand is very fine quartz grains	
51.3	52.2	Sandy Silt, 10YR6/8 (yellowish brown), with 10YR7/2 (light gray) mottling, firm, and slightly moist. Sand is very fine quartz grains	
52.2	52.4	Gravelly Sandy Silt, 10YR6/8 (yellowish brown), with 10YR7/2 (light gray) mottling, firm, and slightly moist. Sand is very fine quartz grains	
52.4	55.0	Clayey Silt, 10YR7/2 (light gray) with 10YR7/8 (yellow) mottling, firm, plastic, and slightly moist	
55.0	57.5	Silty Clay, 10YR7/1 (light gray) with vertical mottling by 2.5YR4/8 (red), stiff, moderately plastic, and slightly moist	
57.5	58.8	Sandy Silt, 10YR7/6 (yellow) with laminations of 7.5YR6/8 (reddish yellow), firm, and moist	
58.8	60.8	Clayey Silt, 10YR7/2 (light gray) mottled with 7.5YR6/8 (reddish yellow), firm, and slightly moist	
60.8	62.0	Sand, 7.5YR6/8 (reddish yellow), soft to loose, and wet	

211-A-011

Plant North -2048.2, Plant East -4995.49

8/17/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
62.0	62.7	Sand, 10YR8/1 (white), loose, and wet. Sand is very fine quartz grains	HU4
62.7	64.5	Silt, 10YR8/1 (white), soft, plastic, and wet	
64.5	65.0	Sand and Gravel, wet. Sand is composed of fine and coarse grains. Gravel is subrounded chert, 0.5- to 1.0-inch diameter	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.1	Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 4 mm- to 0.5-inch diameter	Fill
3.1	15.2	Silt, 10YR7/2 (light gray) mottled with 10YR7/4 (very pale brown), soft, nonplastic to slightly plastic, and moist	HU1
15.2	18.6	Silt with little Clay and Gravel, 10YR7/2 (light gray) with some 10YR7/3 (very pale brown) mottling, moderately hard, moderately plastic, and moist. Gravel is rounded to subangular chert without iron patina, 0.3-inch diameter	
18.6	18.9	Gravelly Sand with little Silt, 10YR5/4 (yellowish brown), firm, and slightly moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert without(?) iron patina, 4 mm- to 0.4-inch diameter	
18.9	19.9	Silty Sand with some Gravel, 10YR7/2 (light gray), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.4-inch diameter	HU2
19.9	21.4	Silty Sand with little Gravel, 7.5YR7/2 (pinkish gray), firm, and moist. Sand consists of 70% fine quartz grains and 30% very coarse, subrounded, chert grains. Gravel is subrounded chert without(?) iron patina, 4 mm- to 0.3-inch diameter	
21.4	22.6	Sand, 7.5YR7/6 (reddish yellow) GRADING DOWN to 10YR7/6 (yellow) mottled with 10YR8/1 (white), firm, and moist. Sand is very fine quartz grains	
22.6	23.6	Gravelly Sand with Silt, 10YR6/6 (brownish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.4- to 0.8-inch diameter	
23.6	25.1	Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
25.1	25.9	Silt with Sand, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, slightly plastic, and moist. Sand is fine quartz grains	
25.9	28.1	Sand with Gravel, 7.5YR6/8 (reddish yellow) with some 7.5YR8/1 (white) mottling, firm-to-dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 4 mm- to 0.8-inch diameter	
28.1	29.1	Sand, 10YR7/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
29.1	30.0	Sand with Gravel as 25.9 to 28.1 ft	
30.0	32.1	Sand with Gravel, 10YR6/4 (light yellowish brown), firm-to-dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded chert with(?) iron patina, 0.3- to 0.9-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
32.1	35.6	Silt, 7.5YR7/4 (pink), soft, moderately plastic, and moist	HU3
35.6	37.5	Silt with Sand, 10YR8/3 (very pale brown), soft, nonplastic, and moist. Sand is very fine quartz grains	
37.5	44.9	Silt GRADING DOWN to Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, moderately plastic to plastic, and moist	
44.9	48.1	Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), very soft, moderately plastic, and moist	
48.1	48.6	Silty Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is very fine quartz grains	
48.6	50.1	Silt as 44.9 to 48.1 ft	
50.1	50.8	Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains	
50.8	51.2	Clay, 7.5YR6/4 (light brown) mottled with 7.5YR8/1 (white), moderately hard, plastic, and moist	
51.2	54.6	Silt with Clay, 7.5YR8/1 (white) with 7.5YR7/6 (reddish yellow) mottling, moderately soft, moderately plastic, and moist	
54.6	55.6	Clay as 50.8 to 51.2 ft	
55.6	57.4	Silt with some Sand, 10YR8/3 (very pale brown), soft, slightly plastic, and moist. Sand is fine quartz grains	HU4
57.4	62.7	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
62.7	65.0	Sand with Gravel, 10YR8/3 (very pale brown), firm, and wet. Sand is 80% fine quartz grains and 20% coarse, rounded, chert gains. Gravel is rounded to subrounded chert without iron patina, 4 mm- to 0.5-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.8	Missing	Missing and Fill
3.8	4.2	Fill: Sandy Silty Gravel, 10YR7/1 (light gray), loose, and moist. Gravel is rounded chert, 0.8- to 1.1-inch diameter. Sand is fine quartz grains	
4.2	4.8	Fill: Gravelly Sand, 2.5YR6/8 (light red), loose, and moist. Sand is fine quartz grains. Gravel is rounded chert, 0.8- to 1.1-inch diameter	
4.8	4.9	Wood fragments, 10YR2/1 (black)	
4.9	5.0	Silt, 10YR7/1 (light gray) with greenish tinge, soft, nonplastic, and moist	HU1
5.0	5.1	Silt as 4.9 to 5.0 ft	
5.1	17.2	Silt, 10YR8/1 (white) mottled with 10YR7/6 (yellow), moderately soft to soft, nonplastic, and moist	
17.2	19.5	Sand, 7.5YR7/6 (reddish yellow), lightly consolidated, and moist. Sand is very fine GRADING DOWN to fine quartz grains	HU2
19.5	19.8	Sand with Gravel, 10YR7/4 (very pale brown), hard, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert, 0.2- to 0.4-inch diameter	
19.8	21.7	Clayey Silt with some Gravel, 10YR7/1 (light gray), hard, moderately plastic, and slightly moist. Gravel is rounded chert without iron patina, 0.2- to 0.3-inch diameter	
21.7	23.0	Sandy Silt with Gravel, 10YR7/2 (light gray), moderately soft, slightly plastic, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert without iron patina, 4 mm- to 0.6-inch diameter	
23.0	24.7	Sandy Gravel with Silt, 10YR7/4 (very pale brown), hard, and moist. Gravel is rounded to subrounded chert without iron patina, 0.3- to 0.7-inch diameter. Sand is fine quartz grains	
24.7	25.7	Sandy Silt, 10YR8/1 (white) mottled with 10YR7/6 (yellow), moderately soft, nonplastic, and moist	
25.7	27.3	Sand, 10YR7/6 (yellow) with some 10YR8/1 (white) laminations, lightly consolidated, and moist. Sand is fine quartz grains	
27.3	32.5	Sandy Silt with some Gravel, 7.5YR8/2 (pinkish white) mottled with 7.5YR8/1 (white), moderately soft, nonplastic, and moist. Sand is fine quartz grains. Gravel is rounded to subrounded chert with iron patina, 0.3- to 1.0-inch diameter	
32.5	35.7	Sandy Silty Gravel, 10YR7/4 (very pale brown), lightly consolidated, and moist. Gravel is rounded to subrounded chert with iron patina, 0.3- to 1.0-inch diameter. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
35.7	37.4	Clayey Silt, 10YR7/4 (pink), very soft, slightly plastic, and moist	HU3
37.4	45.0	Sandy Silt, 10YR8/1 (white) mottled with 10YR7/6 (yellow), soft, nonplastic, and moist	
45.0	46.0	Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, moderately plastic, and moist	
46.0	46.3	Silt with Gravel, 7.5YR6/6 (reddish yellow), soft, moderately plastic, and moist. Gravel is rounded to subrounded chert with iron patina, 0.3-inch diameter	
46.3	46.5	Silt, 7.5YR6/6 (reddish yellow), soft, moderately plastic, and moist	
46.5	48.1	Sand, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), lightly consolidated/ moderately soft, slightly plastic, and moist. Sand is very fine quartz grains	
48.1	50.0	Clayey Silt, mottled 7.5YR7/4 (pink) and 7.5YR8/1 (white), soft to moderately soft, plastic, and moist	
50.0	51.7	Sandy Silt, 7.5YR8/2 (pinkish white) mottled with 7.5YR7/4 (pink) and with some 7.5YR3/1 (very dark gray) blebs (manganese?), soft, moderately plastic to slightly plastic, and moist	
51.7	52.1	Sand, 7.5YR8/2 (pinkish white) GRADING DOWN to 7.5YR7/6 (reddish yellow), lightly consolidated, and moist. Sand is fine quartz grains	
52.1	52.3	Clay, 7.5YR7/2 (pinkish gray), moderately soft, plastic, and moist	
52.3	54.5	Sand, 7.5YR7/4 (pink) with few 7.5YR8/1 (white) laminations, lightly consolidated, and moist. Sand is fine quartz grains	
54.5	54.8	Gravelly Sand, 7.5YR7/4 (pink), loose, and very moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert with iron patina, 0.3- to 0.8-inch diameter	
54.8	55.9	Sand with trace Gravel, 7.5YR7/4 (pink), loose, and very moist. Sand is fine quartz grains. Gravel is rounded to subrounded chert with iron patina, 4 mm- to 0.3-inch diameter	
55.9	56.2	Sandy Gravel, 7.5YR7/4 (pink), loose, and very moist. Gravel is rounded to subrounded chert with iron patina, 4 mm- to 0.3-inch diameter. Sand is fine quartz grains	
56.2	56.4	Sand, 10YR8/4 (very pale brown), loose, and wet. Sand is very fine quartz grains	
56.4	56.8	Gravelly Sand, 10YR6/6 (brownish yellow), loose, and moist. Sand is predominately fine quartz grains but includes coarse, subrounded, chert grains. Gravel is rounded to subrounded chert with iron patina, 0.2- to 1.0-inch diameter	

211-A-013

Plant North -2066.264, Plant East -5194.135

9/5/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
56.8	58.4	Slightly Clayey Silt, 10YR8/1 (white) with abundant 10YR7/6 (yellow) laminations, moderately soft, moderately plastic, and moist	
58.4	59.8	Clayey Silt, 5YR8/1 (white) with abundant 5YR7/8 (reddish yellow) laminations, moderately soft, plastic, and moist	
59.8	62.6	Silt, 10YR8/6 (yellow) with 10YR8/1 (white) mottling, soft, slightly plastic, and moist	
62.6	64.2	Sand, 10YR8/4 (very pale brown) with 10YR7/6 (yellow) laminations GRADING DOWN to 10YR8/1 (white), lightly consolidated, and moist. Sand is very fine to fine quartz grains	HU4
64.2	65.0	Gravelly Sand, 10YR8/2 (very pale brown), loose, and moist. Sand is predominately fine quartz grains but includes 15 to 20% coarse, subangular, chert grains. Gravel is subrounded to rounded chert with iron patina, 0.2- to 1.0-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.5	Silt, 10YR6/3 (pale brown), soft (crumbles to powder), nonplastic, and dry	Fill
0.5	3.4	Sandy Gravel, 5YR5/8 (yellowish red), loose, and moist. Gravel is rounded to subrounded chert with iron patina, 0.2- to 0.8-inch diameter. Sand is fine quartz grains	
3.4	5.0	Silt, 10YR7/1 (light gray) with green tinge, moderately soft, nonplastic, and slightly moist	HU2
5.0	15.0	Silt, 10YR7/1 (light gray) with some 10YR7/6 (yellow) mottling	
15.0	18.4	Silt, 10YR6/4 (light yellowish brown) with some 10YR7/1 (light gray) mottling	
18.4	22.3	Clayey Silt, 10YR7/2 (light gray), moderately hard, slightly to moderately plastic, and slightly moist. Trace of subrounded to subangular chert gravel (with little iron patina), 0.2- to 0.4-inch diameter	
22.3	25.0	Silty Sandy Gravel, 10YR6/3 (pale brown), dense/hard, and moist. Gravel is subangular chert with little iron patina, 4 mm- to 0.3-inch diameter. Sand is fine quartz grains	HU3
25.0	28.8	Interbedded Sand and Silt, 10YR6/4 (light yellowish brown) with some 10YR8/1 (white) mottling, lightly consolidated/soft, nonplastic to slightly plastic, and moist. Sand is very fine quartz grains	
28.8	33.1	Gravelly Sand, 10YR6/3 (pale brown) mottled with 10YR8/1 (white), moderately dense/hard, and moist. Sand is very fine quartz grains. Gravel is subrounded chert with light iron patina, 0.3- to 1.1-inch diameter	
33.1	34.5	Gravelly Sand as 28.8 to 33.1 ft but with some Clay	
34.5	35.8	Sand, 10YR7/4 (very pale brown), lightly consolidated, and moist. Sand is fine quartz grains	
35.8	37.5	Silty Sandy Gravel, 10YR7/2 (light gray), moderately dense/hard, and moist. Gravel is rounded to subangular chert with iron patina, 0.3- to 1.0-inch diameter. Sand is fine quartz grains	
37.5	38.7	Silty Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, lightly consolidated/soft, nonplastic, and moist. Sand is fine quartz grains	
38.7	39.8	Clayey Silt, 10YR7/2 (light gray), soft, plastic, and very moist	
39.8	40.6	Sand, 10YR8/1 (white), loose, and wet. Sand is very fine quartz grains	
40.6	42.4	Clayey Silt, 10YR8/2 (very pale brown) with light 10YR7/6 (yellow) mottling, moderately soft, moderately plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
42.4	43.4	Sand, 10YR8/2 (very pale brown), lightly consolidated, and very moist. Sand is fine quartz grains	HU3
43.4	45.8	Clayey Silt, 10YR8/2 (very pale brown) with light mottling by 10YR7/6 (yellow), moderately soft, moderately plastic, and moist	
45.8	49.6	Silt with Sand, 10YR8/2 (very pale brown) with some 10YR7/4 (very pale brown) mottling and laminations, soft, slightly plastic to nonplastic, and moist. Sand is very fine quartz grains	
49.6	52.4	Sand, 10YR8/1 (white) with 10YR7/6 (yellow) mottling, lightly consolidated, and moist. Sand is very fine quartz grains	
52.4	54.2	Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations and staining, lightly consolidated and moist. Sand is fine quartz grains	
54.2	56.9	Gravelly Sand, 10YR7/2 (light gray), loose, and moist. Sand is fine to medium quartz grains. Gravel is subrounded to rounded chert without iron patina, 0.3- to 0.4-inch diameter	
56.9	58.4	Clayey Silt, 7.5YR7/4 (pink) with some 7.5YR7/1 (light gray) mottling, soft, moderately plastic, and moist	
58.4	60.0	Silt with some Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, soft, slightly plastic, and moist. Sand is fine quartz grains	
60.0	60.2	Clay, 10YR8/1 (white), soft, plastic, and moist	
60.2	62.0	Sand with Silt, 10YR8/1 (white) with some 10YR7/6 (yellow) mottling, lightly consolidated/soft, nonplastic, and moist. Sand is very fine quartz grains	
62.0	63.5	Sand, 10YR7/6 (yellow), lightly consolidated, and moist. Sand is fine quartz grains	HU4
63.5	63.8	Clay as 60.0 to 60.2 ft	
63.8	64.0	Sandy Gravel, 10YR6/4 (light yellowish brown), loose, and moist. Gravel is subangular to subrounded chert with iron patina, 0.2- to 0.4-inch diameter. Sand is equal parts fine quartz grains and medium and coarse, subrounded, chert grains	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.4	Fill: Silty Gravel, 10YR7/1 (light gray), loose, nonplastic, and dry. Gravel is subangular limestone, 4 mm- to 0.6-inch diameter (dense gravel aggregate/DGA)	Fill
0.4	3.8	Fill: Silty Sandy Gravel, 2.5YR5/8 (red), moderately dense/hard, and moist. Gravel is subrounded to subangular chert with iron patina, 0.4- to 1.0-inch diameter. Sand is fine quartz grains	
3.8	5.1	Silt, 10YR7/1 (light gray), soft, nonplastic, and moist	HU1
5.1	14.8	Silt, 10YR7/3 (very pale brown) mottled with 10YR7/1 (light gray), soft, nonplastic to slightly plastic, and moist	
14.8	15.8	Silt, 10YR8/3 (very pale brown), moderately hard, nonplastic, and slightly moist	
15.8	17.3	Sand, 10YR8/2 (very pale brown) with little 10YR7/4 (very pale brown) mottling, lightly consolidated/soft, nonplastic, and moist. Sand is very fine quartz grains	
17.3	21.6	Clayey Silt with trace of Gravel, 10YR7/1 (light gray), moderately hard, slightly to moderately plastic, and moist. Gravel is rounded chert with light iron patina, 0.2- to 0.3-inch diameter	
21.6	25.5	Gravelly Sand with Silt, 10YR7/4 (very pale brown), dense/hard, and moist. Sand is predominately fine quartz grains but includes some coarse, subrounded, chert grains. Gravel is subrounded to subangular chert with iron patina, 0.2- to 0.8-inch diameter	HU2
25.5	26.4	Clayey Silt, 10YR7/3 (very pale brown) with blebs of 10YR8/1 (white), soft, plastic, and moist	
26.4	28.1	Interbeds of Sand (fine quartz grains) and Clayey Silt, 7.5YR7/8 (reddish yellow) with blebs of 7.5YR8/1 (white), soft, slightly plastic, and moist	
28.1	33.8	Sandy Silt, 10YR8/2 (very pale brown) with light 10YR7/6 (yellow) mottling, soft, slightly plastic, and moist	
33.8	35.5	Gravelly Sand with Silt, 10YR8/2 (very pale brown) with 10YR8/1 (white) mottling GRADING DOWN to 7.5YR7/4 (pink), dense/hard, and moist. Sand is fine to medium quartz grains. Gravel is rounded to subangular chert with iron patina, 0.2- to 0.8-inch diameter	
35.5	37.9	Clayey Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, plastic, and moist	
37.9	42.8	Slightly Clayey Silt, 10YR8/1 (white) with heavy 10YR7/6 (yellow) mottling, soft, slightly plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
42.8	53.3	Silt, 10YR8/2 (very pale brown) mottled with 10YR6/6 (brownish yellow), moderately soft, slightly plastic, and moist	HU3
53.3	58.6	Silty Sand, 10YR8/1 (white) GRADING DOWN to 10YR7/6 (yellow) mottled with 10YR8/1 (white), lightly consolidated/soft, nonplastic to slightly plastic, and moist. Sand is fine quartz grains	
58.6	60.8	Clayey Silt, 10YR8/1 (white) with light 10YR7/6 (yellow) laminations, moderately soft, plastic, and moist	
60.8	65.6	Sand, 10YR8/4 (very pale brown) GRADING DOWN to 10YR8/1 (white), lightly consolidated, and very moist. Sand is fine quartz grains	HU4
65.6	66.0	Sandy Gravel, 7.5YR8/2 (pinkish white), loose, and wet. Gravel is subrounded to subangular chert with iron patina, 0.3- to 1.0-inch diameter. Sand is 85% fine quartz grains and 15% coarse, subangular, chert grains	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.2	Sandy Gravel, 2.5YR6/6 (light red), dense, and moist. Gravel is subangular to subrounded chert with iron patina, 0.4- to 0.8-inch diameter. Sand is fine quartz grains	FILL
2.2	6.0	Silt, 10YR7/2 (light gray) mottled with 10YR6/1 (gray), moderately hard, nonplastic, and moist	HU1
6.0	14.7	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, nonplastic, and moist	
14.7	15.8	Sand, 10YR7/3 (very pale brown), firm, and moist. Sand is very fine quartz grains	
15.8	16.7	Interbedded Silt, 7.5YR7/4 (pink), soft, slightly plastic, and moist AND Sand, 7.5YR6/6 (reddish yellow), firm, and moist. Sand is very fine quartz grains	
16.7	19.0	Clay, 7.5YR7/6 (reddish yellow), moderately hard, plastic, and moist	
19.0	20.0	Clay with some Silt and some Gravel, 10YR7/2 (light gray) with 10YR7/4 (very pale brown) mottling. Gravel is subangular chert without iron patina, 0.3- to 0.4-inch diameter AND rounded chert without iron patina, 0.6-inch diameter	
20.0	23.8	Silt with Sand, 10YR8/1 (white) with 10YR7/6 (yellow) mottling, soft, nonplastic, and moist. Sand is very fine quartz grains	
23.8	25.7	Silty Gravel with Sand, 7.5YR6/6 (reddish yellow) with some 7.5YR3/1 (very dark gray) stain (manganese?), dense, and moist. Gravel is subrounded to subangular chert without iron patina, 4-mm to 0.6-inch diameter. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains	HU2
25.7	26.1	Sand, 10YR8/4 (very pale brown), firm, and moist. Sand is fine quartz grains	
26.1	26.4	Gravelly Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is rounded to subangular chert without iron patina, 0.3- to 0.4-inch diameter	
26.4	33.1	Silt with Sand, 10YR8/3 (very pale brown) with 10YR7/6 (yellow) mottling, soft, nonplastic, and moist. Sand is very fine quartz grains	
33.1	34.7	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains	
34.7	35.2	Silty Gravel with Sand, 7.5YR6/4 (light brown), dense, and moist. Gravel is subrounded chert without iron patina, 4-mm to 0.4-inch diameter	
35.2	39.5	Silt with Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft, plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
39.5	43.2	Silt, 10YR8/1 (white) mottled with 10YR7/6 (yellow), soft, slightly plastic, and moist	HU3
43.2	44.9	Silt with Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white)	
44.9	48.0	Silt, 10YR8/2 (very pale brown) mottled with 7.5YR5/8 (strong brown), moderately soft, moderately plastic, and moist	
48.0	48.9	Clay with Silt, 10YR8/3 (very pale brown), moderately hard, plastic, and moist	
48.9	49.6	Silt with Sand and Gravel, 10YR8/2 (very pale brown), moderately hard, nonplastic, and moist. Sand is very fine quartz grains. Gravel is subrounded chert without iron patina, 4-mm to 0.7-inch diameter	
49.6	50.0	Sand, 10YR8/1 (white) mottled with 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains	
50.0	51.0	Clay with Silt, 10YR8/2 (very pale brown) mottled with 7.5YR7/6 (reddish yellow), moderately hard, plastic, and moist	
51.0	54.9	Silt with Sand, 10YR8/1 (white) mottled with 10YR7/6 (yellow) and 7.5YR7/6 (reddish yellow), moderately soft, nonplastic, and moist. Sand is very fine quartz grains	
54.9	56.8	Clay with some Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), moderately soft, plastic, and moist	
56.8	58.1	Sand, 10YR8/2 (very pale brown) with 10YR8/6 (yellow) staining, lightly consolidated, and moist. Sand is very fine quartz grains	
58.1	60.2	Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, moderately plastic, and moist	HU4
60.2	65.0	Sand, 10YR8/2 (very pale brown) with 7.5YR8/4 (pink) mottling, lightly consolidated, and moist. Sand is very fine quartz grains	
65.0	65.2	Sandy Gravel, 10YR4/2 (dark grayish brown) (stained with manganese?), loose, and moist. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.6-inch diameter. Sand is fine quartz grains	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.1	Gravelly Sand, 2.5YR6/4 (light reddish brown), loose, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, quartz grains. Gravel is subangular to subrounded chert with iron patina, 4-mm to 0.5-inch diameter	Fill
2.1	5.1	Silt, 10YR7/1 (light gray), moderately soft, nonplastic, and moist	HU1
5.1	17.6	Silt, 10YR7/2 (light gray) with 10YR7/6 (yellow) mottling, soft, slightly plastic, and moist	
17.6	18.3	Sand, 7.5YR6/4 (light brown), loose, and wet. Sand is very fine quartz grains	
18.3	20.1	Silt with little Clay, 7.5YR8/1 (white) with heavy mottling by 7.5YR7/6 (reddish yellow), moderately hard, moderately plastic, and moist	
20.1	21.6	Gravelly Sand with some Silt, 7.5YR6/4 (light brown), moderately dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 4-mm to 0.4-inch diameter	HU2
21.6	22.0	Sandy Silt with some Clay, 10YR8/2 (very pale brown), soft, slightly plastic, and wet	
22.0	22.8	Sand, 10YR7/3 (Very pale brown), loose, and wet. Sand is very fine quartz grains	
22.8	23.7	Silt GRADING DOWN to Sand, 10YR7/3 (very pale brown), soft, nonplastic, and moist. Sand is fine quartz grains	
23.7	24.3	Silt with some Clay and little Gravel, 10YR7/1 (light gray), moderately hard, plastic, and moist	
24.3	26.0	Sandy Gravel with little Silt, 10YR7/4 (very pale brown), loose, and moist. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.8-inch diameter. Sand is fine quartz grains	
26.0	27.0	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is fine quartz grains	
27.0	27.3	Sandy Gravel with little Silt as 24.3 to 26.0 ft	
27.3	30.0	Silt with little Sand, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, nonplastic, and moist. Sand is fine quartz grains	
30.0	32.5	Silt, 7.5YR7/4 (pink), moderately hard, slightly plastic, and moist	
32.5	34.0	Sand with Gravel, 7.5YR7/6 (reddish yellow) GRADING DOWN to 7.5YR8/2 (pinkish white), dense, and moist. Sand is very fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.8-inch diameter	
34.0	35.0	Sand, 10YR7/6 (yellow), firm, and moist. Sand is very fine to fine quartz grains	
35.0	39.0	Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
39.0	42.6	Silt with little Sand, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, nonplastic, and moist. Sand is very fine quartz grains	HU3
42.6	47.1	Silt with little Clay, 10YR7/3 (very pale brown) with 10YR7/6 (yellow) and 10YR7/1 (light gray) mottling, soft, slightly plastic, and moist	
47.1	50.0	Silt with Clay, 7.5YR7/1 (light gray) mottled with 7.5YR7/4 (pink), soft, moderately plastic, and moist	
50.0	51.6	Silt, 10YR7/1 (light gray), soft, moderately plastic, and moist	
51.6	52.6	Silt with Sand, 10YR7/1 (light gray), firm/moderately soft, nonplastic, and moist. Sand is very fine quartz grains	
52.6	53.7	Sand, 7.5YR7/6 (reddish yellow) with 7.5YR8/1 (white) mottling, firm, and moist. Sand is fine quartz grains	
53.7	58.4	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 7.5YR8/1 (white), soft, moderately plastic, and moist	
58.4	61.0	Clay with Silt, 10YR8/2 (very pale brown), soft, plastic, and moist	
61.0	64.4	Sand, 10YR8/2 (very pale brown) GRADING DOWN to 10YR7/3 (very pale brown), lightly consolidated to loose, and moist to wet. Sand is very fine quartz grains	HU4
64.4	65.0	Silt with little Clay, 10YR8/1 (white), soft, moderately plastic, and moist	
65.0	65.1	Sand as 61.0 to 64.4 ft	
65.1	65.2	Sandy Gravel. Gravel is subangular chert with iron patina, 0.4- to 1.0 inch diameter	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.0	Concrete and gravel	FILL
1.0	5.0	Silt, 10YR7/1 (light gray), firm, and moist	
5.0	7.0	Silt, 10YR7/1 (light gray) mottled with 7.5YR7/8 (reddish yellow), firm, and slightly moist	
7.0	10.0	Silt, 10YR7/1 (light gray) mottled with 7.5YR7/8 (reddish yellow) and containing blebs of 10YR4/1 (dark gray), firm, and slightly moist	
10.0	13.5	Silt, 10YR7/1 (light gray) with slight mottling by 10YR6/8 (brownish yellow), moderately firm, and slightly moist	
13.5	15.0	Silt, 10YR6/8 (brownish yellow), moderately firm, and slightly moist	
15.0	18.5	Silt, 10YR7/4 (very pale brown), firm, and slightly moist	
18.5	20.0	Gravelly Silty Clay, 10YR7/2 (light gray) intermixed with 10YR5/8 (dark yellowish brown), stiff, and slightly moist. Gravel is subrounded chert with and without (white) iron patina, 0.5- to 1.2-inch diameter	
20.0	23.5	Silty Clayey Sand with trace Gravel, 10YR5/6 (yellowish brown), firm, and slightly moist. Sand is medium to coarse grained	
23.5	25.0	Clayey Sand, 10YR7/1 (light gray) mottled with 10YR6/8 (brownish yellow), firm, and slightly moist. Sand is fine to medium quartz grains	
25.0	28.7	Clayey Gravelly Sand, 7.5YR5/8 (strong brown), firm, and slightly moist. Sand is fine to coarse grained. Gravel is subrounded to subangular chert, 0.5- to 0.8-inch diameter	HU2
28.7	30.0	Silty Sand, 10YR7/2 (light gray), semi-firm, and slightly moist	
30.0	35.9	Silty Gravelly Sand, 7.5YR6/8 (reddish yellow). Sand is medium to coarse quartz grains. Gravel (5 to 10% of sample) is chert, 0.2- to 1.0-inch diameter	
35.9	41.0	Intermixed Silts, 10YR7/1 (light gray) and 7.5YR7/8 (reddish yellow), moderately soft, and very moist	
41.0	41.5	Sandy Silt, 10YR5/4 (yellowish brown), moderately soft, and moist	HU3
41.5	44.5	Silt, 10YR7/1 (light gray) mottled with 5YR6/8 (reddish yellow)	
44.5	45.0	Silty Sand, 10YR7/2 (light gray), firm, and slightly moist	
45.0	52.0	Silty Sand, 7.5YR7/1 (light gray) mottled with 7.5YR6/8 (reddish yellow), moderately firm, and slightly moist	
52.0	55.0	Silty Gravelly Sand, 10YR7/1 (light gray) mottled with 7.5YR6/8 (reddish yellow), firm, and slightly moist. Gravel is subrounded chert, 0.2- to 0.8-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
55.0	56.3	Clayey Silt, 10YR7/1 (light gray) mottled with 7.5YR5/8 (strong brown), stiff, and moist	
56.3	57.0	Sand, 10YR7/1 (light gray), loose, and saturated (flowing)	
57.0	57.5	Silty Clay, 7.5YR5/8 (strong brown), firm, and slightly moist	
57.5	58.6	No recovery	
58.6	60.9	Clayey Silt, 5YR7/6 (reddish yellow) mottled with 5YR8/1 (white), moderately hard, slightly plastic, and moist	HU4
60.9	62.1	Sand, 10YR8/1 (white) with 10YR7/6 (yellow) laminations, lightly consolidated, and moist. Sand is very fine quartz grains	
62.1	63.7	Silt, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, soft, slightly plastic, and moist	
63.7	64.1	Sand, 10YR8/1 (white), loose, and wet. Sand is very fine quartz grains	
64.1	64.4	Gravelly Sand, 10YR7/3 (very pale brown), loose, and wet. Sand is very fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.2- to 0.5-inch diameter	HU5
64.4	65.0	Sandy Gravel, 10YR7/4 (very pale brown), loose, and wet. Gravel is subangular to subrounded chert with iron patina, 0.3- to 1.0-inch diameter. Sand is 80% very fine quartz grains and 20% coarse, rounded, chert with iron patina grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.8	Gravelly Silt, 10YR7/1 (light gray), loose, and slightly moist. Gravel is subangular limestone, 0.2- to 0.4-inch diameter (dense gravel aggregate/DGA)	FILL
1.8	4.2	Silt, 10YR7/1 (light gray) with light blue tinge, soft, nonplastic, and slightly moist	
4.2	14.9	Silt, 10YR8/2 (very pale brown) with variable mottling by 10YR7/6 (yellow), soft, slightly plastic, and moist. Note: some 10YR3/1 (very dark gray) mottling (manganese?) beginning at 13.0 ft	
14.9	18.9	Silt, 7.5YR7/4 (pink) with 7.5YR8/1 (white) mottling, moderately soft, moderately plastic, and moist	
18.9	20.6	Clayey Silt with little Gravel, 10YR7/1 (light gray), moderately hard to hard, slightly to moderately plastic, and moist. Gravel is rounded chert, predominately 0.3-inch diameter but up to 0.7-inch diameter	
20.6	21.1	Gravelly Sand with Silt, 7.5YR6/6 (Reddish yellow), firm, and moist. Sand is very fine quartz grains. Gravel is subangular to subrounded chert with iron patina, 4 mm- to 0.4-inch diameter	
21.1	22.2	Clayey Silt with some Gravel, 7.5YR7/1 (light gray) mottled with 7.5YR7/6 (reddish yellow), moderately soft, plastic, and moist	
22.2	22.5	Silt, 10YR8/1 (white), soft, nonplastic, and moist	
22.5	23.2	Sand, 7.5YR6/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
23.2	23.6	Gravelly Sand with Silt as 20.6 to 21.1 ft	
23.6	24.9	Silt with Sand, 7.5YR8/1 (white) with little 7.5YR7/6 (yellow) mottling, moderately soft, nonplastic, and moist. Sand is very fine quartz grains	HU1
24.9	26.0	Sandy Gravel, 7.5YR7/4 (pink), dense, and slightly moist. Gravel is subangular chert with no-to-little iron patina, 4-mm to 0.6-inch diameter. Sand is 60% fine quartz grains and 40% coarse, rounded, chert grains	
26.0	27.2	Silty Gravelly Sand, 10YR7/4 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is rounded to subrounded chert with light iron patina, 0.4- to 1.0-inch diameter	
27.2	28.9	Slightly Clayey Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, moderately plastic, and moist	
28.9	33.2	Silty Gravelly Sand, 7.5YR5/6 (strong brown), dense, and moist. Sand is 60% fine quartz grains and 40% coarse, rounded, chert grains. Gravel is subrounded to subangular chert with iron patina, 4 mm- to 0.7-inch diameter	
			HU2

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
33.2	34.5	Sand GRADING DOWN to Sand with Gravel, 7.5YR8/6 (reddish yellow), lightly consolidated, and moist. Sand is fine quartz grains. Gravel is subangular chert with iron patina, 0.4- to 0.5-inch diameter	
34.5	35.3	Sandy Gravel with Silt, 10YR5/1 (gray) (stained with manganese?) GRADING DOWN to 10YR6/4 (light yellowish brown), dense, and moist. Gravel is subangular to subrounded chert with iron patina, 4 mm- to 0.8-inch diameter. Sand is fine quartz grains	
35.3	39.0	Slightly Clayey Silt, 7.5YR7/4 (pink) with 7.5YR7/1 (light gray) mottling GRADING DOWN to 7.5YR6/1 (gray), moderately hard, slightly plastic, and moist	HU3
39.0	42.1	Silt, 10YR7/3 (very pale brown), moderately soft to moderately hard, slightly plastic, and moist	
42.1	43.6	Slightly Clayey Silt, 10YR6/2 (light brownish gray), moderately hard, moderately plastic, and moist	
43.6	44.8	Silt, 10YR6/3 (pale brown), moderately soft, nonplastic, and moist	
44.8	47.0	Slightly Clayey Silt as 42.1 to 43.6 ft	
47.0	50.5	Slightly Clayey Silt, 7.5YR6/8 (reddish yellow) mottled with 7.5YR7/1 (light gray), moderately hard, slightly plastic, and moist	
50.5	54.6	Silt, 10YR8/3 (very pale brown) mottled with 10YR7/1 (light gray) and 10YR7/6 (yellow), moderately soft, slightly plastic, and moist	
54.6	58.3	Slightly Clayey Silt, 7.5YR8/4 (pink) mottled with 7.5YR8/1 (white) and 7.5YR6/8 (reddish yellow), moderately hard, slightly plastic, and moist	
58.3	61.0	Silt with Sand, 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft, nonplastic, and moist. Sand is very fine quartz grains	
61.0	63.0	Sand, 10YR8/3 (very pale brown) with some 10YR7/8 (yellow) laminations, firm, and moist. Sand is very fine quartz grains	
63.0	64.0	Silt, 10YR8/1 (white) with 10YR7/6 (yellow) laminations, loose, nonplastic, and moist	HU4
64.0	65.0	Gravelly Sand, 7.5YR7/3 (pink), loose, and wet. Sand is 80% fine quartz grains and 20% coarse, subangular, chert grains. Gravel is subangular to subrounded chert with iron patina, 4 mm- to 1.0-inch diameter	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.9	Silty Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert with iron patina, 0.4- to 0.6-inch diameter	FILL
3.9	14.9	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, nonplastic to slightly plastic, and moist	HU1
14.9	15.2	Sand, 10YR8/1 (white), dense, and moist. Sand is very fine quartz grains	
15.2	18.3	Silt, 10YR6/6 (brownish yellow) mottled with 10YR8/2 (very pale brown), soft, nonplastic, and moist	
18.3	19.8	Silty Clay, 10YR7/1 (light gray), moderately hard, moderately plastic, and moist	
19.8	20.9	Silt with some Gravel, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, nonplastic, and moist. Gravel is rounded chert without iron patina, 0.5-inch diameter	
20.9	21.5	Sand with Gravel, 7.5YR6/6 (reddish yellow), lightly consolidated, and moist. Sand is fine to medium, rounded, quartz grains. Gravel is subangular chert without iron patina, 0.3- to 0.4-inch diameter	HU2
21.5	22.3	Silty Gravel with Sand, 7.5YR6/4 (light brown), dense, and moist. Gravel is rounded to subangular chert without iron patina, 0.3- to 0.4-inch diameter. Sand is fine quartz grains	
22.3	22.8	Clay, 10YR7/1 (light gray), moderately soft, plastic, and moist	
22.8	24.4	Gravelly Sand, 7.5YR7/4 (pink) with some staining by 7.5YR3/1 (very dark gray) (manganese?), firm, and moist. Sand is fine quartz grains. Gravel is subangular chert with iron patina, 0.4- to 0.6-inch diameter	
24.4	26.8	Sand with Gravel, 10YR7/3 (very pale brown), lightly consolidated, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with iron patina, 0.4- to 0.6-inch diameter	
26.8	27.4	Sandy Gravel, 10YR8/3 (very pale brown), loose, and moist. Gravel is rounded to subrounded chert without iron patina, 0.3- to 0.4-inch diameter	
27.4	30.9	Silt, 10YR7/3 (very pale brown) with little mottling by 10YR8/1 (white), soft, nonplastic, and moist	
30.9	31.7	Silt with some Gravel, 10YR7/3 (very pale brown) with little mottling by 10YR8/1 (white), soft, plastic, and moist. Gravel is subrounded to subangular chert without iron patina, 0.4-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
31.7	32.5	Sand with Gravel, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.4-inch diameter	HU3
32.5	35.0	No recovery	
35.0	35.6	Silt with little Clay and Gravel, 10YR7/4 (very pale brown), soft, moderately plastic, and moist. Gravel is rounded chert without iron patina, 4-mm to 0.3-inch diameter	
35.6	39.5	Silt with little Clay, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white) GRADING DOWN to 7.5YR8/1 (white), soft, plastic, and moist	
39.5	43.1	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/4 (very pale brown), soft, nonplastic, and moist	
43.1	45.0	Silt with little Clay, 10YR7/1 (light gray) with some 10YR6/6 (brownish yellow) mottling, moderately hard, plastic, and moist. Note: red tinge over 44.5 to 45.0 ft	
45.0	47.5	Silt with Sand, 10YR8/1 (white) with some 10YR6/6 (brownish yellow) mottling, soft, nonplastic, and moist. Sand is very fine quartz grains	
47.5	53.0	Silt with Sand, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, nonplastic, and moist. Sand is very fine quartz grains	
53.0	53.4	Sand, 10YR8/1 (white) with 2.5YR8/3 (pink) tinge, firm, and moist. Sand is very fine quartz grains	
53.4	54.5	Sandy Gravel, 10YR8/1 (white) with some 10YR7/6 (yellow) staining, firm/moderately consolidated, and moist. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.4-inch diameter. Sand is fine quartz grains	
54.5	55.0	Sand with some Gravel, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.4- to 0.8-inch diameter	
55.0	56.9	Silt with some Clay, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, soft, slightly to moderately plastic, and moist	
56.9	58.4	Silt with some Sand, 10YR8/2 (very pale brown), soft, slightly plastic, and moist. Sand is very fine quartz grains	
58.4	59.1	Sand, 10YR8/1 (white), loose, and wet. Sand is very fine quartz grains	
59.1	61.1	Silty Sand with Silt interbeds, 10YR8/1 (white) with 10YR7/6 (yellow) laminations, lightly consolidated, and moist. Sand is very fine quartz grains	
61.1	62.6	Sand, 10YR8/6 (yellow), firm, and moist. Sand is very fine quartz grains	

211-A-020

Plant North -2085.988, Plant East -5035.164

9/24/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
62.6	64.6	Sand, 10YR8/3 (very pale brown), loose, and wet. Sand is very fine quartz grains	HU4
64.6	65.0	Silt, 10YR8/1 (white), soft, plastic, and moist	
65.0	65.3	Sand, 10YR7/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
65.3	67.5	Sandy Gravel, 10YR6/3 (pale brown), loose, and wet. Gravel is subangular to subrounded chert, 0.3- to 1.0-inch diameter. Sand is 75% fine to medium, rounded, quartz grains and 25% coarse, rounded, chert grains. Note: 10YR5/1 (gray) staining (manganese?) over 66.1 to 66.5 ft	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.0	No description	Fill
1.0	4.0	Sandy Gravel, 2.5YR6/6 (light red), moderately dense/hard, and moist. Gravel is subrounded chert with iron patina, 0.3- to 0.4-inch diameter. Sand is fine quartz grains	
4.0	5.0	Silt, 10YR7/1 (light gray) with bluish tinge, moderately hard, nonplastic, and moist	HU1
5.0	15.0	Silt, 10YR7/1 (light gray) with 10YR7/6 (yellow) staining and mottling, soft, nonplastic, and moist	
15.0	18.5	Slightly Clayey Silt with some Sand, 7.5YR7/6 (reddish yellow) with little 7.5YR8/1 (white) mottling, soft, moderately plastic, and moist	
18.5	19.9	Clayey Silt, 10YR7/1 (light gray) with 10YR7/4 (very pale brown) mottling, moderately hard to hard, moderately plastic, and moist	
19.9	20.0	Sand, 10YR6/6 (brownish yellow), loose, and moist. Sand is very coarse, angular, chert grains	
20.0	20.9	Silt, 10YR6/6 (brownish yellow), soft, slightly plastic, and moist	
20.9	23.4	Clayey Silt, 10YR7/1 (light gray) with 10YR7/6 (yellow) mottling, moderately hard, moderately plastic, and moist. Trace chert gravel without iron patina, rounded, 0.2-inch diameter	
23.4	24.0	Sandy Gravel with Silt, 7.5YR5/6 (strong brown), moderately dense/hard, and moist. Gravel is subangular chert with light iron patina, 0.2- to 0.3-inch diameter	HU2
24.0	24.8	Sandy Silt, 10YR8/1 (white), soft, nonplastic, and moist	
24.8	25.0	Sandy Gravel, 10YR6/6 (brownish yellow), loose, and moist. Gravel is subrounded to subangular chert with iron patina, 0.3-inch diameter. Sand is fine quartz grains	
25.0	25.7	Silt, 10YR6/4 (light yellowish brown), soft, moderately plastic, and moist	
25.7	29.8	Interbedded Silt with some Sand and slightly Clayey Silt, 10YR8/1 (white) with light 10YR7/6 (yellow) staining and mottling, moderately soft, slightly to moderately plastic, and moist	
29.8	30.0	Sandy Gravel, 10YR6/6 (brownish yellow), loose, and moist. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.8-inch diameter. Sand is fine quartz grains	
30.0	30.5	Sand, 7.5YR7/4 (pink), lightly consolidated, and moist. Sand is fine quartz grains	
30.5	33.1	Sandy Gravel as at 29.8 to 30.0 ft	
33.1	34.4	Sandy Gravel as above but with silt	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
34.4	34.7	Sandy Gravel, 10YR7/4 (very pale brown), loose, and moist. Gravel is rounded to subangular chert with iron patina, 0.3- to 1.0-inch diameter. Sand is fine to medium quartz grains	HU3
34.7	38.6	Slightly Clayey Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, moderately plastic, and moist	
38.6	44.3	Silt, 10YR8/2 (very pale brown) with light 10YR7/6 (yellow) laminations, soft, nonplastic, and soft	
44.3	45.1	Clay, 10YR7/1 (light gray) with 10YR6/4 (light yellowish brown) mottling, moderately soft, plastic, and moist	
45.1	46.6	Silt, 10YR7/3 (very pale brown), soft, nonplastic, and moist	
46.6	54.5	Sand, 10YR8/2 (very pale brown) with some light 10YR7/6 (yellow) laminations, lightly consolidated, and moist. Sand is very fine grains	
54.5	54.7	Sandy Gravel, 10YR6/3 (pale brown), loose, and moist. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter. Sand is very fine quartz grains	
54.7	55.0	Sand as at 46.6 to 54.5 ft	
55.0	56.9	Sand, 10YR7/6 (yellow) with light 10YR8/1 (white) mottling, lightly consolidated, and moist. Sand is fine quartz grains	
56.9	58.4	Slightly Clayey Silt, 10YR8/2 (very pale brown) with light 10YR7/6 (yellow) laminations, moderately soft, slightly plastic, and moist	
58.4	59.9	Sand, 10YR8/1 (white), lightly consolidated, and moist. Sand is very fine quartz grains	
59.9	62.4	Silt, 10YR8/3 (very pale brown), soft, nonplastic, and moist	
62.4	65.8	Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations and staining, firm, and moist. Sand is very fine grains	HU4
65.8	66.0	Gravelly Sand, 10YR8/1 (white), loose, and moist. Sand is fine quartz grains. Gravel is rounded chert with iron patina, 0.3- to 0.7-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.5	Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.8-inch diameter	FILL
2.5	5.5	Silt, 10YR7/2 (light gray) with green tinge, moderately hard, nonplastic, and moist	HU1
5.5	18.0	Silt, 10YR7/2 (light gray) with 10YR7/6 (yellow) mottling, moderately soft to soft, nonplastic, and moist	
18.0	20.0	Silt with Clay, 10YR8/2 (very pale brown) mottled with 10YR7/1 (light gray), moderately hard to hard, moderately plastic, and moist	
20.0	22.7	Silt with some Clay, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), moderately hard, moderately plastic, and moist	
22.7	23.0	Silty Gravel with Sand, 10YR4/4 (dark yellowish brown), firm, and moist. Gravel is subrounded chert without iron patina, 0.4- to 0.8-inch diameter. Sand is fine quartz grains	
23.0	23.2	Silt, 10YR5/6 (yellowish brown), soft, nonplastic, and moist	HU2
23.2	24.6	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains	
24.6	25.6	Sandy Gravel, 10YR7/4 (very pale brown), dense, and moist. Gravel is subangular to subrounded chert without iron patina, 4-mm to 0.6-inch diameter. Sand is fine quartz grains	
25.6	26.6	Sandy Gravel with Silt, 10YR6/6 (brownish yellow), dense, and moist. Gravel is subangular to subrounded chert without iron patina, 4-mm to 0.6-inch diameter. Sand is fine quartz grains	
26.6	30.8	Silt with Sand, 10YR7/4 (very pale brown) mottled with 10YR8/4 (very pale brown), soft, nonplastic, and moist. Sand is very fine quartz grains	
30.8	31.7	Clay with Silt, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) mottling and strong 2.5YR6/6 (light red) staining at 30.9 to 31.1 ft, moderately hard, moderately plastic, and moist	
31.7	32.6	Silt, 7.5YR8/1 (white) mottled with 7.5YR7/6 (reddish yellow), moderately soft, slightly plastic, and moist	
32.6	33.5	Silt with Sand, 10YR8/2 (very pale brown), moderately soft, nonplastic, and moist. Sand is very fine quartz grains	
33.5	35.2	Sand, 10YR7/8 (yellow), firm, and moist. Sand is fine quartz grains	
35.2	36.5	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 10YR7/6 (yellow), soft, moderately plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
36.5	46.1	Silt, 10YR8/2 (very pale brown) with some 10YR7/6 (yellow) laminations, soft, nonplastic, and moist	HU3
46.1	51.5	Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, firm, and moist. Sand is very fine quartz grains	
51.5	52.5	Silt with little Gravel, 10YR8/2 (very pale brown) with light 2.5YR6/6 (light red) staining, soft, nonplastic, and moist. Gravel is rounded chert without iron patina, 0.4- to 0.6-inch diameter	
52.5	55.1	Gravelly Sand, 10YR8/2 (very pale brown), lightly consolidated, and very moist. Sand is very fine quartz grains. Gravel is rounded to subrounded chert without iron patina, 4-mm to 0.7-inch diameter	
55.1	56.0	Sand, 10YR8/2 (very pale brown) with few 10YR7/6 (yellow) laminations, lightly consolidated, and wet. Sand is very fine quartz grains	
56.0	56.4	Sand GRADING DOWN to poorly sorted Sandy Gravel, 10YR7/3 (very pale brown), firm, and wet. Sand is medium, rounded, quartz grains (above) and fine to medium, rounded, quartz grains (below). Gravel is rounded to subrounded chert without iron patina, 4-mm to 0.4-inch diameter.	
56.4	57.1	Silt with some Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, slightly plastic, and moist	
57.1	58.3	Silt, 10YR8/2 (very pale brown) with 10YR8/6 (yellow) laminations, soft, nonplastic, and moist	
58.3	59.3	Sand, 10YR8/2 (very pale brown) with 7.5YR7/4 (pink) laminations, lightly consolidated, and wet. Sand is very fine quartz grains	
59.3	60.9	Silt, 10YR8/2 (very pale brown), moderately soft, nonplastic, and moist	
60.9	63.6	Sand, 10YR8/4 (very pale brown), firm, and wet. Sand is very fine quartz grains	HU4
63.6	64.0	Silt as 59.3 to 60.9 ft	
64.0	64.4	Sandy Gravel, 7.5YR7/6 (reddish yellow), firm, and moist. Gravel is subrounded chert with iron patina, 4-mm to 0.5-inch diameter. Sand is very fine quartz grains	HU5
64.4	67.7	Sand, 10YR7/4 (very pale brown), firm, and wet. Sand is very fine quartz grains	
67.7	68.0	Sandy Gravel, 10YR7/4 (very pale brown), loose, and wet. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter. Sand is very fine to fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.0	Concrete and subgrade gravel	Fill
2.0	5.0	Silt, 10YR6/1 (gray) speckled with 10YR3/1 (very dark gray), firm, and dry to slightly moist	HU1
5.0	10.0	Silt, 10YR7/1 (light gray) mottled with 7.5YR7/8 (yellow), firm, nonplastic, and dry to slightly moist	
10.0	11.5	Silt as above but soft and moist	
11.5	15.0	Silt, 10YR7/1 (light gray) with some mottling by 10YR6/4 (light yellowish brown), firm, nonplastic, and slightly moist	
15.0	17.5	Silt, 10YR7/2 (light gray), slightly soft, slightly plastic, and moist	
17.5	18.0	Silty Sand with trace Gravel, 7.5YR6/8 (reddish yellow), slightly loose, and very moist. Sand is fine to medium quartz grains. Gravel is subangular chert with iron patina, 0.8-inch diameter	
18.0	20.0	Clayey Sandy Silt, 7.5YR6/1 (gray) with some mottling by 7.5YR6/8 (reddish yellow), firm to very firm, and slightly moist	
20.0	26.0	Clayey Gravelly Sand, 7.5YR6/8 (reddish brown), firm, and slightly moist. Sand ranges from fine to coarse grains. Gravel is subangular chert, 0.5-to 0.8-inch diameter	HU2
26.0	28.0	Silty Sand, 10YR7/2 (light gray), firm, and moist. Trace white chert gravel, 0.8-inch diameter	
28.0	30.5	Clayey Sandy Silt, 7.5YR8/1 (white) with 7.5YR6/8 (reddish yellow) laminations, firm, and moist	
30.5	33.0	Gravelly Silty Sand, 10YR6/8 (brownish yellow), firm, and slightly moist. Sand is fine to coarse, subangular, quartz grains. Gravel is subangular chert, 0.3- to 0.5-inch diameter	
33.0	36.2	Silty Sand, 10YR7/1 (light gray), semi firm, and very moist. Sand is fine quartz grains	
36.2	40.0	Silty Clay with little Sand, 7.5YR5/8 (strong brown) with slight mottling by 10YR7/1 (light gray), firm to stiff, very plastic, and slightly moist to moist	HU3
40.0	45.0	Clayey Silt, 10YR8/2 (very pale brown) mottled with 10YR6/8 (brownish yellow), soft to slightly soft, very plastic, and very moist. Trace fine quartz sand	
45.0	47.5	Clayey Silt as above with trace of subrounded chert gravel, 0.2-inch diameter	
47.5	52.1	Silty Clayey Sand, 10YR8/2 (very pale brown), soft, and very moist to slightly wet. Sand is very fine quartz grains	
52.1	53.1	Silty Gravelly Sand, 10YR4/6 (dark yellowish brown), firm, and slightly moist. Gravel is subangular chert, 0.3- to 1.2-inch diameter	
53.1	55.2	Silty Sand, 10YR5/3 (brown) mottled with 7.5YR6/8 (reddish yellow), firm, and slightly moist.	

211-A-023

Plant North -2096.132, Plant East -4994.506

9/11/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
55.2	57.5	Silty Clay with trace Gravel, 10YR7/2 (very pale brown) mottled with 10YR6/8 (brownish yellow)	
57.5	58.0	Gravelly Silty Clay, 10YR7/2 (very pale brown) mottled with 10YR6/8 (brownish yellow). Gravel is white, subrounded, chert	
58.0	61.9	Silty Sand, 10YR7/1 (light gray), soft, and very moist to wet. Sand is very fine quartz grains	
61.9	62.5	Sand, 10YR8/3 (very pale brown), firm to slightly loose, and wet. Sand is fine quartz grains	HU4
62.5	64.9	Sand as above but loose and saturated	
64.9	65.0	Sand and Gravel. Gravel is chert, 0.2- to 0.4-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.8	Concrete residue from drilling through road bed	FILL
0.8	1.2	Silt, 10YR6/1 (gray), hard, nonplastic, and dry	
1.2	2.1	Gravelly Sand, 5YR7/8 (reddish yellow), loose, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
2.1	3.6	Silt, 10YR7/1 (light gray), moderately soft, nonplastic, and slightly moist	HU1
3.6	18.1	Silt, 10YR8/2 (very pale brown) mottled with 10YR6/6 (brownish yellow), soft, nonplastic, and moist	
18.1	21.8	Slightly Clayey Silt with trace Gravel, 10YR7/1 (light gray) with 10YR6/6 (brownish yellow) mottling, moderately hard, slightly to moderately plastic, and moist. Gravel is rounded chert without iron patina, 0.2-inch diameter	
21.8	23.9	Gravelly Sand with Silt, 10YR7/4 (very pale brown), moderately dense/hard, and moist. Sand is 60% fine quartz grains and 40% coarse, subangular, chert grains. Gravel is subangular to rounded chert without iron patina or with light patina, 0.3- to 0.8-inch diameter	HU2
23.9	25.1	Sand, 10YR8/1 (white) with light 10YR7/6 (yellow) staining, firm, and moist. Sand is very fine quartz grains	
25.1	26.6	Gravelly Sand, 10YR7/4 (very pale brown), loose, and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert with iron patina, 0.5- to 1.0-inch diameter	
26.6	30.1	Clayey Silt with Gravel, 10YR7/1 (light gray) with little 10YR7/6 (yellow) mottling, moderately soft, moderately plastic, and moist. Gravel is subrounded to rounded chert without iron patina, 0.4- to 0.6-inch diameter	
30.1	31.0	Silty Gravelly Sand, 7.5YR7/6 (reddish yellow), moderately dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with iron patina, 0.2- to 0.4-inch diameter	
31.0	31.4	Sand, 7.5YR6/8 (reddish yellow), lightly consolidated, and moist. Sand is very fine quartz grains	
31.4	32.3	Silt, 10YR8/1 (white), soft, nonplastic, and moist	
32.3	34.7	Silty Sandy Gravel, 10YR7/3 (very pale brown), dense to moderately dense, and moist. Gravel is subrounded to subangular chert with light iron patina, 4-mm to 0.7-inch diameter. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
34.7	39.3	Slightly Clayey Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), very soft, moderately plastic, and moist	HU3
39.3	46.3	Silt, 10YR8/2 (very pale brown) with little 10YR7/6 (yellow) mottling, soft, slightly plastic, and moist	
46.3	48.6	Silty Sand, 10YR8/2 (very pale brown), lightly consolidated, nonplastic, and very moist. Sand is very fine quartz grains	
48.6	51.9	Sand, 10YR8/1 (white) with light 10YR7/6 (yellow) laminations, lightly consolidated, and moist. Sand is very fine quartz grains	
51.9	52.9	Gravelly Sand, 10YR7/6 (yellow), lightly consolidated to loose, and moist. Sand is very fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.5- to 0.6-inch diameter	
52.9	56.3	Sand, 10YR7/3 (very pale brown) GRADING DOWN to 10YR7/6 (yellow) with few 5YR6/8 (reddish yellow) laminations, lightly consolidated, and very moist. Sand is fine quartz grains	
56.3	59.9	Silt with Sand, 10YR8/2 (very pale brown), very soft, nonplastic, and very moist	
59.9	65.8	Sand, 10YR8/3 (very pale brown) with some 10YR7/6 (yellow) laminations GRADING DOWN to 5YR6/6 (reddish yellow), lightly consolidated to loose, and wet. Sand is very fine quartz grains	HU4
65.8	66.3	Gravel, 10YR8/4 (very pale brown), loose, and wet. Gravel is subrounded to rounded chert with no iron patina or light iron patina, 0.2- to 0.5-inch diameter	HU5
66.3	67.5	Sand with Gravel, 7.5YR7/6 (reddish yellow), loose, and wet. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.2- to 0.5-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.4	Concrete residue from drilling through road bed	FILL
0.4	1.1	Gravelly Silt, 10YR7/1 (light gray), loose/soft, nonplastic, and slightly moist. Gravel is subangular limestone, 0.3- to 0.5-inch diameter (dense gravel aggregate/DGA)	
1.1	2.0	Sandy Gravel, 2.5YR5/4 (reddish brown), dense, and moist. Gravel is subrounded chert with iron patina, 0.2- to 0.6-inch diameter. Sand is fine quartz grains	
2.0	3.0	Silt, 10YR7/1 (light gray) with green/blue tinge, moderately soft, nonplastic, and slightly moist	HU1
3.0	17.3	Silt, 10YR7/1 (light gray) mottled and stained with 10YR7/6 (yellow), soft, nonplastic, and moist	
17.3	21.5	Slightly Clayey Silt, 10YR7/2 (light gray) with heavy mottling by 10YR7/6 (yellow), moderately hard, slightly plastic, and moist	
21.5	22.6	Sandy Gravel, 10YR4/4 (dark yellowish brown), dense, and moist. Gravel is subangular to rounded chert with and without iron patina, 4-mm to 1.1-inch diameter. Sand is fine quartz grains	HU2
22.6	23.0	Sand, 5YR5/4 (reddish brown), firm, and moist. Sand is fine quartz grains	
23.0	23.5	Silty Clay, 10YR7/3 (very pale brown), moderately soft, moderately plastic, and moist	
23.5	24.1	Sandy Gravel as 21.5 to 22.6 ft	
24.1	24.4	Sand, 10YR4/3 (brown), dense, and moist. Sand is poorly sorted, ranging from fine to coarse, rounded, quartz grains	
24.4	25.2	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains	
25.2	26.5	Silty Sandy Gravel, 10YR7/3 (very pale brown), dense, and moist. Gravel is subangular to subrounded chert with and without iron patina, 0.2- to 0.6-inch diameter. Sand is 40% fine quartz grains and 60% coarse, angular, chert grains	
26.5	27.1	Gravelly Sand, 7.5YR7/6 (reddish yellow), lightly consolidated, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
27.1	27.4	Silt with Sand, 7.5YR8/4 (pink), moderately soft, nonplastic, and moist. Sand is fine quartz grains	
27.4	30.0	Silt with Sand, 10YR8/1 (white) with light 10YR7/6 (yellow) mottling GRADING DOWN to 10YR7/1 (light gray), moderately soft to soft, slightly plastic, and moist. Sand is very fine quartz grains	
30.0	33.5	Sand, 10YR8/2 (very pale brown) with some 10YR7/6 (yellow) laminations, firm, and moist. Sand is very fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
33.5	34.4	Silty Gravelly Sand with blebs of Clay, 10YR6/4 (light yellowish brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.2- to 0.4-inch diameter	HU3
34.4	35.6	Sand, 10YR6/6 (brownish yellow), firm, and moist. Sand is very fine quartz grains	
35.6	40.0	Slightly Clayey Silt, 7.5YR6/6 (reddish yellow) with 7.5YR8/1 (white) mottling, soft, moderately plastic, and moist	
40.0	42.2	Slightly Clayey Silt, 10YR8/2 (very pale brown) with light 10YR7/6 (yellow) mottling, soft, moderately plastic, and moist	
42.2	44.7	Slightly Clayey Silt, 5YR7/2 (pinkish gray), soft, moderately plastic, and moist	
44.7	45.0	Sand, 7.5YR7/2 (pinkish gray), firm, and moist. Sand is very fine quartz grains	
45.0	49.3	Interbedded slightly Clayey Silt and Silt, 10YR8/1 (white) with some 10YR7/6 (yellow) mottling, soft, slightly to moderately plastic, and moist	
49.3	55.0	Sand, 10YR8/1 (white), lightly consolidated, and moist. Sand is very fine quartz grains	
55.0	56.6	Sand with trace Gravel, 10YR8/4 (very pale brown) with 10YR6/6 (brownish yellow) laminations from 55.6 to 56.6 ft, firm, and moist. Sand is very fine quartz grains. Gravel is subrounded to rounded chert without iron patina, 0.2- to 0.4-inch diameter	
56.6	57.9	Silty Clay, 7.5YR7/2 (pinkish gray) with 7.5YR6/6 (reddish yellow) mottling, moderately hard, moderately plastic, and moist	
57.9	61.9	Silt, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) staining and laminations, soft, nonplastic, and moist	HU4
61.9	65.0	Sand, 10YR8/1 (white) with 10YR7/6 (yellow) and 10YR6/6 (brownish yellow) laminations, firm, and very moist. Sand is very fine quartz grains	
65.0	65.2	Gravelly Sand, 10YR8/3 (very pale brown), loose, and wet. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.2- to 0.4-inch diameter	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.0	Silty Gravel, 10YR7/1 (light gray), loose, and slightly moist. Gravel is subangular to subrounded limestone (dense gravel aggregate/DGA), 4 mm- to 0.3-inch diameter	Fill
1.0	1.7	Silty Gravel as 0.0 to 1.0 ft but moist	
1.7	2.1	Silty Sandy Gravel, 2.5YR5/4 (reddish brown), dense, and moist. Gravel is subrounded chert with iron patina, 4 mm- to 0.4-inch diameter. Sand is fine quartz grains.	
2.1	3.0	Silt, 10YR7/1 (light gray), hard, nonplastic, and slightly moist	HU1
3.0	15.0	Silt, 10YR7/2 (light gray) mottled with 10YR6/6 (brownish yellow), soft, nonplastic, and moist	
15.0	16.3	Silt as 3.0 to 15.0 ft but colored 10YR7/3 (very pale brown)	
16.3	22.3	Clayey Silt with some Gravel, 10YR7/4 (very pale brown) with little 10YR7/1 (light gray) mottling GRADING DOWN to 10YR6/2 (light brownish gray), moderately hard, slightly plastic, and moist. Gravel is rounded to subrounded chert without iron patina, 0.2-inch diameter	
22.3	23.0	Gravelly Sand, 7.5YR6/6 (reddish yellow), firm to dense, and moist. Sand is predominately fine quartz grains but includes some coarse, rounded, quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.2- to 0.4-inch diameter	HU2
23.0	24.2	Silt, 10YR8/2 (very pale brown) with 10YR6/6 (brownish yellow) mottling/laminations, moderately soft, slightly plastic, and moist	
24.2	26.0	Sandy Gravel, 7.5YR6/6 (reddish yellow), dense, and moist. Gravel is subrounded to subangular chert with iron patina, 0.2- to 0.8-inch diameter. Sand is fine quartz grains	
26.0	29.8	Interbedded Clayey Silt, moderately soft, plastic, and moist AND Sandy Silt, soft, nonplastic, and moist. Both are colored 10YR8/1 (white) mottled/laminated with 10YR7/6 (yellow)	
29.8	30.6	Sand, 10YR8/4 (very pale brown), lightly consolidated, and moist. Sand is very fine quartz grains	
30.6	33.5	Gravelly Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 4 mm- to 0.3-inch diameter	
33.5	36.0	Gravelly Sand as 30.6 to 33.5 ft but with Silt	
36.0	44.2	Slightly Clayey Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), very soft, slightly plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
44.2	45.0	Silt, 7.5YR7/2 (pinkish gray) with 7.5YR7/4 (pink) mottling, soft, plastic, and moist	HU3
45.0	49.9	Slightly Clayey Silt as 36.0 to 44.2 ft. Includes little 10YR3/1 (very dark gray) blebs (manganese?)	
49.9	51.5	Sand, 7.5YR8/4 (pink), loosely consolidated, and moist. Sand is fine quartz grains	
51.5	51.8	Sand, 7.5YR8/4 (pink), firm, and moist. Sand is medium, rounded, quartz grains GRADING DOWN to mix of medium, rounded, quartz grains and very coarse, subangular, chert grains	
51.8	52.7	Sand, 10YR8/2 (very pale brown), lightly consolidated, and wet. Sand is very fine quartz grains	
52.7	53.1	Gravelly Sand, 10YR8/4 (very pale brown), loose, and moist. Sand is a mix of fine quartz grains and coarse, subangular, chert grains. Gravel is rounded to subrounded chert without iron patina, 4 mm- to 0.4-inch diameter	
53.1	55.1	Sand, 10YR8/2 (very pale brown), lightly consolidated, and very moist. Sand is very fine quartz grains	
55.1	55.5	Sand, 10YR8/2 (very pale brown) with some 10YR7/6 (yellow) staining, firm, and moist. Sand is fine quartz grains	
55.5	56.4	Sandy Gravel, 10YR7/4 (very pale brown), loose, and moist. Gravel is rounded to subangular chert without iron patina, 0.2- to 0.8-inch diameter. Sand is equal portions of fine and medium, rounded, quartz grains	
56.4	61.4	Silt, 10YR8/3 (very pale brown) with light 10YR7/6 (yellow) laminations, soft, slightly plastic, and moist	
61.4	66.1	Sand, 10YR7/6 (reddish yellow), loose, and wet. Sand is fine quartz grains	HU4
66.1	66.5	Sandy Gravel, 10YR7/4 (very pale brown), loose, and moist. Gravel is subrounded to subangular chert with iron patina, 0.2- to 1.0-inch diameter. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.7	Silty dark brown soil over Gravel and Sand, white to medium gray. Gravel is limestone. Sand is coarse grains.	Fill
1.7	5.0	Silt, 10YR8/1 (white), soft, and dry	HU1
5.0	8.5	Silt, 10YR7/1 (light gray) speckled with 10YR8/4 (very pale brown), firm, and moist	
8.5	10.0	Silt, 7.5YR7/1 (light gray), soft to very soft, slightly plastic, and very moist	
10.0	12.5	Permeameter sample - no description	
12.5	15.0	Silt, 10YR7/1 (light gray), soft, nonplastic, and moist	
15.0	16.1	Silt with Sand, 10YR6/6 (brownish yellow), soft, nonplastic, and moist. Sand is fine quartz grains	
16.1	17.5	Silty Gravelly Sand, 10YR5/4 (yellowish brown), moderately loose, and moist. Sand is 70% fine quartz grains and 30% coarse, subrounded, chert grains. Gravel is subrounded chert with iron patina, 0.3-inch diameter	
17.5	19.6	Silt with Clay, 10YR6/2 (light brownish gray), hard, slightly to moderately plastic, and slightly moist	HU2
19.6	20.0	Sandy Gravel, 10YR6/6 (brownish yellow), dense, and moist. Gravel is rounded to subrounded chert without iron patina, 0.3- to 1.0-inch diameter. Sand is fine quartz grains	
20.0	21.0	Silt, 10YR5/3 (brown), very soft, moderately plastic, and very moist	
21.0	22.0	Sandy Gravel, 7.5YR6/6 (reddish yellow), dense, and moist. Gravel is subrounded to rounded chert without iron patina, 0.3- to 0.4-inch diameter. Sand is fine quartz grains	
22.0	24.5	Permeameter sample - no description	
24.5	25.0	Sand Gravel as 21.0 to 22.0 ft but gravel ranges up to 0.8-inch diameter	
25.0	26.2	Sandy Gravel, 10YR5/4 (yellowish brown), dense, and moist. Gravel is subangular to subrounded chert with iron patina, 4 mm- to 0.7-inch diameter. Sand is fine quartz grains	
26.2	27.2	Silt with Clay and some Gravel, 10YR7/1 (light gray), hard, moderately plastic, and slightly moist. Gravel is subrounded to rounded chert without iron patina, mostly 0.3-inch diameter but some 0.8- to 1.0-inch diameter	
27.2	28.6	Silty Gravelly Sand, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is fine quartz grains. Gravel is rounded to subrounded chert without iron patina, 0.3- to 0.5-inch diameter	
28.6	28.9	Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, nonplastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
28.9	30.5	Slightly Clayey Silt, 10YR7/1 (light gray) with 10YR7/6 (yellow) mottling, hard, slightly plastic, and slightly moist	
30.5	32.0	Silty Sand, 10YR7/8 (yellow) with 10YR7/1 (light gray) mottling, firm/moderately soft, (nonplastic), and moist. Sand is very fine quartz grains	
32.0	34.1	Silty Sandy Gravel, 7.5YR6/6 (reddish yellow), dense, and moist. Gravel is subangular to subrounded chert without iron patina or with light iron patina, 4 mm- to 0.5-inch diameter. Sand is 80% fine quartz grains and 20% coarse, subangular, chert grains	
34.1	35.0	Sandy Gravel, 7.5YR6/8 (reddish yellow), dense, and moist. Gravel is subrounded to rounded chert without iron patina, 0.3- to 0.5-inch diameter. Sand is 80% fine quartz grains and 20% coarse, subangular, chert grains	
35.0	35.3	SLOUGH: Silt, 10YR5/4 (yellowish brown), very soft, nonplastic, and very moist	
35.3	37.5	Sandy Gravel as 34.1 to 35.0 ft but gravel ranges up to 0.8-inch diameter	
37.5	40.0	Permeameter sample - no description	No Description
40.0	43.9	Silt, 10YR8/3 (very pale brown) with little 10YR8/1 (white) mottling, soft, moderately plastic, and moist	HU3
43.9	44.7	Sand, 10YR8/1 (white) with 10YR7/6 (yellow) laminations, firm, and moist. Sand is very fine quartz grains	
44.7	47.4	Silt, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) mottling, soft, nonplastic, and moist	
47.4	49.7	Silt with some Clay, 7.5YR7/4 (pink) with 7.5YR8/1 (white) mottling, moderately soft to soft, plastic, and moist	
49.7	53.2	Sand with some Gravel, 7.5YR7/4 (pink) with 7.5YR8/1 (white) mottling, lightly consolidated, and moist. Sand is fine quartz grains. Gravel is rounded to subrounded chert without iron patina, 0.3- to 0.5-inch diameter	
53.2	60.1	Sand interbedded with Clayey Silt, 10YR8/1 (white) with 10YR7/6 (yellow) laminations and staining and some 2.5YR7/8 (light red) blebs, moist. Sand is lightly consolidated, fine, quartz grains. Clayey Silt is soft and moderately plastic	
60.1	66.2	Sand, 10YR8/4 (very pale brown) with some 10YR7/6 (yellow) laminations, loose, and wet. Sand is fine quartz grains	

211-A-027

Plant North -2125.771, Plant East -4995.046

9/11/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
66.2	67.5	Sandy Gravel, 10YR6/6 (brownish yellow), loose, and wet. Gravel is subrounded to subangular chert with iron patina, 4 mm- to 1.0-inch diameter. Sand is 85% fine quartz grains and 15% medium, rounded, quartz grains	HU4

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.4	Silt, 10YR6/3 (pale brown), soft, nonplastic, and slightly moist. Zone of roots and humic material	HU1
0.4	3.7	Silt, 10YR8/2 (very pale brown) with little 10YR6/6 (brownish yellow) mottling, soft (crumbles to powder), nonplastic, and moist GRADING DOWN to dry	
3.7	16.4	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, slightly plastic, and moist	
16.4	18.0	Gravelly Sand, 7.5YR6/4 (light brown), dense, and moist. Sand is fine quartz grains. Gravel is subangular chert with iron patina, 0.3- to 0.6-inch diameter	HU2
18.0	18.7	Sand, 7.5YR6/4 (light brown), firm, and moist. Sand is fine to medium, subrounded, quartz grains	
18.7	20.2	Silt, 7.5YR7/1 (light gray) mottled with 7.5YR7/6 (reddish yellow), moderately soft, moderately plastic, and moist	
20.2	20.5	Gravelly Sand, 7.5YR7/3 (pink), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.3-inch diameter	
20.5	20.9	Sand, 10YR7/4 (pink), firm, and moist. Sand is very fine quartz grains	
20.9	21.4	Gravelly Sand as 20.2 to 20.5 ft	
21.4	23.1	Sandy Gravel, 7.5YR7/3 (pink), dense, and moist. Gravel is subangular chert without iron patina, 0.3-to 0.6-inch diameter. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Note: 20.5 to 23.1 ft is a coarsening downward sequence	
23.1	23.6	Silty Sand with little Gravel, 10YR7/3 (very pale brown), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded to rounded chert without iron patina, 0.4- to 0.5-inch diameter	
23.6	25.1	Sand with Gravel, 10YR6/3 (pale brown), dense, and moist. Sand is 80% fine quartz grains and 20% coarse to very coarse, subrounded, chert grains. Gravel is subrounded chert without iron patina, 0.3-inch diameter	
25.1	25.6	Sand with Gravel as 23.6 to 25.1 ft but sand is medium, subrounded, quartz grains	
25.6	28.3	Sand with little Gravel, 7.5YR7/4 (pink), firm, and moist. Sand is fine quartz grains. Gravel is subangular chert with iron patina, 0.3- to 0.5-inch diameter	
28.3	28.6	Sandy Gravel, 7.5YR7/4 (pink), dense, and moist. Gravel is subrounded to rounded chert without iron patina, 4 mm - to 0.4-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
28.6	31.4	Sand with some Gravel, 10YR7/4 (very pale brown), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded chert without iron patina, 0.6 to 0.8-inch diameter	
31.4	35.0	Sandy Gravel, 10YR6/6 (brownish yellow), dense, and moist. Gravel is subrounded to subangular chert without iron patina, 4 mm- to 1.0-inch diameter. Sand is 80% fine quartz grains and 20% coarse to very coarse, subrounded, chert grains	
35.0	35.5	Silty Clay, 7.5YR7/3 (pink), soft, plastic, and moist	HU3
35.5	35.7	Silty Sand, 7.5YR7/3 (pink), lightly consolidated, and moist. Sand is fine quartz grains	
35.7	36.6	Slightly Clayey Silt, 7.5YR8/2 (pinkish white), soft, plastic, and moist	
36.6	36.8	Silty Sand as 35.5 to 35.7 ft	
36.8	39.9	Silt, 2.5YR7/1 (light reddish gray), soft, moderately plastic, and moist	
39.9	43.1	Silt with Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, soft, nonplastic, and moist. Sand is very fine quartz grains	
43.1	44.6	Silt, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, moderately hard, slightly to moderately plastic, and moist	
44.6	46.0	Clay with Silt, 7.5YR6/6 (reddish yellow) mottled with 7.5YR8/1 (white), moderately soft, moderately plastic, and moist	
46.0	48.0	Silt, 10YR7/4 (very pale brown) with some 10YR8/1 (white) mottling, soft, nonplastic, and moist	
48.0	50.9	Sand, 10YR7/4 (very pale brown) mottled with 10YR8/1 (white), firm, and moist. Sand is very fine quartz grains	
50.9	52.4	Silt with little Clay, 7.5YR7/4 (pink) with light 7.5YR7/1 (light gray) mottling, soft, plastic, and moist	
52.4	54.4	Silty Sand, 10YR7/6 (yellow) with 10YR8/1 (white) mottling, firm, and moist. Sand is very fine quartz grains	
54.4	55.5	Sandy Gravel, 7.5YR6/6 (reddish yellow), firm, and moist. Gravel is rounded to subangular chert without iron patina, 0.3- to 1.0-inch diameter. Sand is very fine quartz grains	
55.5	55.9	Sand, 7.5YR6/6 (reddish yellow), firm, and moist. Sand is very fine quartz grains	
55.9	60.0	Silt, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, soft, slightly plastic, and moist	
60.0	61.3	Sand, 10YR8/1 (white), loose to lightly consolidated, and wet. Sand is very fine quartz grains	

211-A-028

Plant North -2048.759, Plant East -5231.166

9/24/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
61.3	62.1	Gravelly Sand, 10YR8/1 (white), firm, and wet. Sand is fine quartz grains. Gravel is rounded to subrounded chert without iron patina, 0.4- to 1.0-inch diameter		HU4
62.1	62.5	Gravelly Sand, 10YR7/6 (yellow), loose, and wet. Sand is fine to medium, rounded, quartz grains. Gravel is subangular to subrounded chert with iron patina, 0.8- to 1.0-inch diameter		

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.4	Silt, 10YR5/2 (grayish brown), soft (noncohesive), nonplastic, and dry. Zone or roots and humic material	HU1
0.4	3.8	Silt, 10YR8/2 (very pale brown) with little 10YR7/6 (yellow) mottling, moderately hard, nonplastic, and dry	
3.8	16.3	Silt, 10YR7/2 (light gray) mottled with 10YR7/6 (yellow), soft, slightly plastic, and moist	
16.3	17.0	Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is very fine quartz grains	HU2
17.0	19.2	Sand with little Gravel, 7.5YR6/6 (reddish yellow), firm, and moist. Sand is very fine quartz grains. Gravel is rounded to subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
19.2	21.7	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/4 (very pale brown), moderately hard, nonplastic to slightly plastic, and moist	
21.7	23.3	Silt with some Gravel and little Clay, 10YR8/2 (very pale brown) mottled with 10YR7/4 (very pale brown), moderately hard, plastic, and moist. Gravel is rounded chert without iron patina, 0.3- to 0.5-inch diameter	
23.3	25.5	Gravelly Sand, 7.5YR6/4 (light brown), dense, and moist. Sand is 70% fine quartz grains and 30% coarse to very coarse, subrounded, chert grains. Gravel is subrounded to subangular chert with iron patina, 4 mm- to 0.4-inch diameter	
25.5	28.9	Sand GRADING DOWN to Sand with Gravel, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) staining, lightly consolidated to firm, and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert with iron patina, 0.4- to 0.5-inch diameter	
28.9	29.6	Silt with some Clay and little Gravel, 10YR7/2 (light gray), soft, plastic, and moist. Gravel is subangular chert with iron patina, 0.4- to 0.6-inch diameter	
29.6	29.9	Sandy Silt with little Gravel, 10YR7/2 (light gray), soft, nonplastic, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
29.9	32.6	Gravelly Sand, 7.5YR7/4 (pink), dense, and moist. Sand is 70% fine quartz grains and 30% coarse to very coarse, subrounded, chert grains. Gravel is subrounded to subangular chert with iron patina, mostly 0.3-inch diameter but some 0.7- to 1.0-inch diameter	
32.6	34.0	Sand, 7.5YR7/4 (pink), lightly consolidated, and moist. Sand is very fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
34.0	35.3	Gravelly Sand with Silt, 7.5YR5/6 (strong brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.3-to 0.6-inch diameter	HU3
35.3	40.0	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/4 (very pale brown), soft, plastic, and moist	
40.0	42.5	Silt with Sand, 7.5YR8/3 (pink) with some 7.5YR7/6 (reddish yellow) laminations, soft, moderately plastic, and moist. Sand is very fine quartz grains	
42.5	48.1	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, moderately plastic to plastic, and moist	
48.1	49.9	Sand with Silt, 10YR7/4 (very pale brown) mottled with 10YR8/2 (very pale brown), lightly consolidated, and moist. Sand is very fine quartz grains	
49.9	52.1	Sand, 10YR8/1 (white) mottled with 10YR7/6 (yellow), firm, and moist. Sand is very fine to fine quartz grains	
52.1	56.9	Sandy Gravel, 10YR8/2 (very pale brown), lightly consolidated, and moist. Gravel is subrounded chert without iron patina, 0.3- to 0.6-inch diameter. Sand is fine quartz grains	
56.9	60.0	Clay with Silt, 10YR8/2 (very pale brown) with 10YR8/4 (very pale brown) laminations, soft, plastic, and moist	
60.0	62.3	Silt, 10YR8/2 (very pale brown), soft, moderately plastic, and moist	
62.3	63.1	Sand, interbedded 10YR8/1 (white) and 10YR8/4 (very pale brown), firm, and moist. Sand is very fine quartz grains	HU4
63.1	63.6	Silt, 10YR8/4 (very pale brown), soft, nonplastic, and moist	
63.6	64.0	Sand, 10YR7/6 (yellow), loose, and wet. Sand is very fine quartz grains	
64.0	65.0	Sandy Gravel, 10YR7/6 (yellow), stained 10YR6/2 (light brownish gray) at 64.8 to 65.0 ft (manganese?), loose, and wet. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.8-inch diameter. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	5.0	No recovery	Missing
5.0	18.6	Silt, 10YR7/2 (light gray) with 10YR7/4 (very pale brown) mottling and a few 10YR3/1 (very dark gray) blebs (manganese?), soft, nonplastic, and moist	HU1
18.6	21.2	Clay with Silt and some Gravel, 10YR7/2 (light gray) with 10YR6/8 (brownish yellow) mottling, moderately hard, plastic, and moist. Gravel is subrounded to subangular chert without iron patina, 0.4- to 0.5-inch diameter	
21.2	22.7	Silty Sand with Gravel, 10YR7/2 (light gray), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.5-inch diameter	
22.7	24.0	Sandy Gravel, 7.5YR6/6 (reddish yellow), dense, and moist. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.5-inch diameter. Sand is 70% fine quartz grains and 30% coarse to very coarse, subangular, chert grains. Suspect DNAPL presence based on PID trend and distinct smell	HU2
24.0	25.1	Silty Gravelly Sand, 7.5YR6/6 (reddish yellow), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.4- to 0.7-inch diameter	
25.1	26.2	Sand with little Gravel, 7.5YR7/4 (pink), lightly consolidated, and moist. Sand is fine quartz grains. Gravel is rounded chert without iron patina, 0.3-inch diameter	
26.2	27.6	Interbedded Silt and Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations. Silt is soft, nonplastic, and moist. Sand is very fine quartz grains, lightly consolidated, and moist	
27.6	28.9	Sand, 10YR8/2 (very pale brown) mottled with 10YR6/6 (brownish yellow), lightly consolidated, and moist. Sand is 90% fine quartz grains and 10% coarse, rounded, chert grains	
28.9	31.0	Gravelly Sand, 10YR7/4 (very pale brown), dense, and moist. Sand is 80% fine quartz grains and 20% coarse to very coarse, subangular, chert gains. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.5-inch diameter	
31.0	31.8	Sand with little Gravel, 10YR8/1 (white), firm, and moist. Sand is fine quartz grains. Gravel is rounded chert without iron patina, 0.4- to 0.6-inch diameter	
31.8	32.7	Silty Gravelly Sand as 24.0 to 25.1 ft	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
32.7	33.9	Silt GRADING DOWN to Silt with Sand, 7.5YR7/1 (light gray) mottled with 7.5YR6/6 (reddish yellow), soft, moderately plastic to nonplastic, and moist. Sand is very fine quartz grains	HU3
33.9	35.5	Gravelly Sand as 28.9 to 31.0 ft	
35.5	37.5	Silt, 10YR7/3 (very pale brown), soft, slightly plastic, and moist	
37.5	39.9	Silt with Sand, 10YR8/2 (very pale brown), soft, nonplastic, and moist. Sand is very fine quartz grains	
39.9	45.0	Clayey Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), moderately hard, moderately plastic, and moist	
45.0	48.4	Silt, 7.5YR7/6 (reddish yellow) with little 7.5YR8/1 (white) mottling, moderately hard, slightly plastic, and moist	
48.4	49.5	Silt, 7.5YR8/1 (white) with 7.5YR7/8 (reddish yellow) mottling, soft, nonplastic, and moist	
49.5	50.5	Sand, 10YR8/2 (very pale brown), firm to dense, and moist. Sand is very fine quartz grains	
50.5	53.1	Slightly Clayey Silt, 7.5YR8/2 (pinkish white) with some 7.5YR7/8 (reddish yellow) mottling, soft, plastic, and moist	
53.1	54.9	Sand with little Gravel, 10YR8/1 (white), lightly consolidated, and moist. Sand is 90% fine quartz grains and 10% coarse, rounded, chert grains. Gravel is rounded chert without iron patina, 0.5- to 1.0-inch diameter	
54.9	55.4	Sandy Gravel, 10YR8/1 (white), loose, and moist. Gravel is subangular to subrounded chert without iron patina, 0.3- to 1.0-inch diameter. Sand is fine quartz grains	
55.4	56.4	Sand, 10YR8/4 (very pale brown), loose, and wet. Sand is very fine quartz grains	
56.4	57.8	Silt, 7.5YR8/4 (pink) with some 7.5YR7/6 (reddish yellow) laminations, soft, slightly plastic, and moist	
57.8	61.5	Sand, 10YR8/1 (white), lightly consolidated, and moist. Sand is very fine quartz grains	HU4
61.5	65.0	Gravelly Sand, 10YR7/6 (yellow), loose, and wet. Sand is fine to medium, rounded, quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.4- to 0.7-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.5	Sand with Gravel, 2.5YR6/8 (light red), loose, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3-inch diameter	Fill
0.5	4.6	Silt, 10YR7/1 (light gray) with bluish tinge, soft, nonplastic, and moist (suspected fill material)	
4.6	20.0	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, nonplastic, and moist	HU1
20.0	20.7	Clay with some Silt and some Gravel, 10YR7/2 (light gray) with some 10YR7/6 (yellow) mottling, moderately hard, plastic, and moist. Gravel is subrounded chert without iron patina, 0.3- to 0.4-inch diameter	
20.7	22.7	Silty Gravelly Sand, 7.5YR5/6 (strong brown) GRADING DOWN to 7.5YR7/6 (reddish yellow), dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subangular, chert grains. Gravel is subangular to subrounded chert without iron patina, 0.3- to 1.0-inch diameter	HU2
22.7	24.2	Silt, 10YR7/1 (light gray), moderately soft, moderately plastic, and moist	
24.2	25.6	Gravelly Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded chert without iron patina, 0.3- to 0.8-inch diameter	
25.6	28.1	Sandy Gravel with some Silt, 7.5YR6/4 (light brown), dense, and moist. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.6-inch diameter. Sand is 60% fine quartz grains and 40% coarse-to-very-coarse, subangular, chert grains	
28.1	30.8	Sand with some Gravel, firm-to-dense, and moist. Sand is very fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
30.8	32.5	Silty Gravel with Sand, 7.5YR6/4 (light brown), dense, and moist. Gravel is subangular to subrounded chert without iron patina, 0.3- to 1.0-inch diameter. Sand is 80% fine quartz grains and 20% coarse, rounded, chert grains	
32.5	33.3	Silt with some Gravel and little Clay, 10YR6/4 (light yellowish brown) mottled with 10YR8/1 (white), moderately soft, slightly plastic, and moist	
33.3	36.2	Silty Sand with Gravel, 10YR7/4 (very pale brown), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded chert without iron patina, 0.4- to 0.7-inch diameter	
36.2	38.3	Clayey Silt, 7.5YR7/4 (pink) with 7.5YR7/2 (pinkish gray) mottling, moderately hard, plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
38.3	42.5	Silt GRADING DOWN to Silt with Sand, 7.5YR7/1 (light gray) with 7.5YR7/4 (pink) mottling, soft, nonplastic, and moist. Sand is very fine quartz grains	HU3
42.5	44.1	Sand, 10YR8/2 (very pale brown) with some 10YR7/6 (yellow) laminations, firm, and moist. Sand is very fine quartz grains	
44.1	45.3	Silt with little Clay, 10YR7/4 (very pale brown) with 10YR7/1 (light gray) mottling, soft, plastic, and moist	
45.3	48.2	Silt, 10YR7/4 (very pale brown) with mottling by 10YR7/6 (yellow) and 2.5YR6/6 (light red) (2.5YR6/6 prominent from 46.8 to 47.4 ft), soft, slightly plastic, and moist	
48.2	51.0	Sand, 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains GRADING Down to fine quartz grains. Note: 0.05-ft horizon of 10YR3/1 (very dark gray) staining at 48.8 ft (manganese?)	
51.0	53.4	Sand with Gravel interbedded with Sandy Gravel, 10YR8/3 (very pale brown), firm, and moist. Sand is very fine quartz grains. Gravel ranges from subangular chert with 0.3-inch diameter to rounded chert without iron patina, 0.5-inch diameter	
53.4	54.2	Sand, 10YR8/2 (very pale brown) with some 10YR7/6 (yellow) laminations, firm, and wet. Sand is very fine quartz grains	
54.2	55.1	Sand with Gravel, 10YR7/3 (very pale brown), firm-to-dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert trains. Gravel is subrounded chert without iron patina, 4 mm- to 0.3-inch diameter	
55.1	55.6	Sand as at 53.4 to 54.2 ft but without laminations. Sand is very fine quartz grains	
55.6	56.2	Sand with Gravel as at 54.2 to 55.1 ft	
56.2	56.6	Sand, 10YR7/6 (yellow), lightly consolidated, and moist. Sand is very fine quartz grains	
56.6	57.0	Clayey Silt, 10YR8/2 (very pale brown), moderately hard, moderately plastic, and moist	
57.0	58.1	Silt, 10YR8/3 (very pale brown), moderately soft, slightly plastic, and moist	
58.1	59.9	Sand, 10YR8/1 (white) with 10YR7/6 (yellow) laminations, slightly consolidated, and moist. Sand is very fine quartz grains	
59.9	60.7	Clayey Silt as at 56.6 to 57.0 ft	
60.7	66.0	Sand, 10YR8/4 (very pale brown), lightly consolidated to loose, and wet. Sand is very fine quartz grains. Note: 65.0 to 66.0 ft appears to be 'flowing sand' - no structure.	HU4

211-A-031

Plant North -2136.286, Plant East -5040.074

9/26/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
66.0	66.0	Subrounded chert Gravel without iron patina, 0.4- to 1.0-inch diameter		HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.2	Silt, 10YR4/1 (dark gray), soft (loose), nonplastic, and moist. Zone of roots and humic material	HU1
0.2	1.5	Silt, 10YR6/3 (pale brown), soft, nonplastic, and moist	
1.5	4.0	Silt, 10YR7/2 (light gray), soft, nonplastic, and moist	
4.0	5.5	Silt, 10YR7/1 (light gray), moderately hard, nonplastic, and dry	
5.5	19.8	Silt, 10YR7/2 (light gray) with 7.5YR7/6 (reddish yellow) mottling, soft, nonplastic, and moist	
19.8	20.6	Silty Sand with Gravel, 10YR7/4 (pink), dense, and moist. Sand is fine quartz grains. Gravel is subangular to rounded chert, with and without iron patina, 0.3- to 0.5-inch diameter	
20.6	21.1	Silty Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, plastic, and moist	
21.1	22.6	Silty Sandy Gravel, 7.5YR7/4 (pink) with little 7.5YR8/1 (white) mottling, dense, and moist. Gravel is subangular to rounded chert with iron patina, 4 mm- to 0.8-inch diameter. Sand is 70% fine quartz grains and 30% coarse, rounded, chert grains	HU2
22.6	23.8	Silt, 10YR8/1 (white) mottled with 7.5YR7/6 (reddish yellow) GRADING DOWN to 10YR8/1 (white), moderately soft, moderately plastic, and moist	
23.8	25.0	Sand, 10YR8/3 (very pale brown) mottled with 10YR8/1 (white), firm, and moist. Sand is very fine quartz grains	
25.0	25.2	Silt with Gravel, 7.5YR7/1 (light gray), soft, plastic, and moist. Gravel is subrounded chert with iron patina, 0.4- to 1.0-inch diameter	
25.2	25.6	Sand, 10YR8/4 (very pale brown), firm, and moist. Sand is very fine quartz grains	
25.6	30.5	Silt, 10YR8/1 (white) with 10YR7/6 (yellow) mottling and staining, soft, nonplastic, and moist	
30.5	31.6	Silt with little Gravel, 10YR7/1 (light gray), soft, nonplastic, and moist. Gravel is subrounded chert without iron patina, 1.0-inch diameter	
31.6	33.2	Gravelly Sand, 10YR8/3 (very pale brown) mottled with 10YR8/1 (white), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.6-inch diameter	
33.2	34.3	Sandy Gravel with Silt, 10YR7/4 (very pale brown) GRADING DOWN to 10YR7/2 (light gray), dense, and moist. Gravel is subangular chert with iron patina, 4 mm- to 1.0-inch diameter. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
34.3	35.1	Sand with Gravel, 10YR7/4 (very pale brown), loose, and wet. Sand is very fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.7-inch diameter	HU3
35.1	37.9	Clay with some Silt, 7.5YR7/4 (pink) GRADING DOWN to 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft, plastic, and moist	
37.9	38.3	Sand, 10YR7/3 (very pale brown), firm, and moist. Sand is very fine quartz grains	
38.3	47.6	Silt with some Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), moderately hard, slightly to moderately plastic, and moist	
47.6	50.0	Silt, 10YR7/6 (yellow) with some 10YR8/1 (white) mottling, soft to moderately soft, nonplastic, and moist	
50.0	54.6	Silt with Clay, 10YR8/1 (white) with some 7.5YR7/4 (pink) mottling GRADING DOWN to 7.5YR7/4 (pink) with 10YR8/1 (white) mottling, moderately hard, plastic, and moist	
54.6	55.0	Sandy Silt, 7.5YR7/6 (reddish yellow), soft, nonplastic, and moist. Contains trace, subrounded, chert gravel without iron patina, 1.0-inch diameter	
55.0	57.4	Sand, 7.5YR7/6 (reddish yellow) with frequent mottling by 7.5YR4/1 (dark gray), firm, and moist. Sand is very fine quartz grains	
57.4	57.9	Gravel with Sand, 7.5YR6/4 (light brown), dense, and moist. Gravel is subangular to angular chert with iron patina, 4 mm- to 1.1-inch diameter. Sand is 80% fine quartz grains and 20% coarse, angular, chert grains	HU4
57.9	58.2	Sand as 55.0 to 57.4 ft	
58.2	60.0	Sandy Gravel, 7.5YR7/4 (pink), loose, and wet. Gravel is subangular chert with iron patina, 0.4- to 0.7-inch diameter. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.2	Fill: Silt, 10YR4/1 (dark gray), soft, nonplastic, and moist. Zone of roots and humic material	Fill
0.2	0.6	Fill: Silty Gravel, 10YR6/2 (light brownish gray), loose, and moist. Gravel is subangular limestone, 0.3-inch diameter	
0.6	3.0	Fill: Silty Sandy Gravel, 2.5YR5/8 (red), dense, and moist. Gravel is subangular to subrounded chert with iron patina, 4 mm- to 0.4-inch diameter. Sand is fine quartz grains	
3.0	4.2	Silt, 10YR7/1 (light gray), soft, nonplastic, and moist	HU1
4.2	15.3	Silt, 10YR7/2 (light gray) mottled with 10YR7/4 (very pale brown), soft, nonplastic, and moist	
15.3	16.0	Silty Sand, 10YR8/2 (very pale brown), dense, and dry. Sand is very fine quartz grains	HU2
16.0	19.0	Sand, 7.5YR6/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
19.0	19.7	Silty Gravel, 7.5YR6/4 (light brown), dense, and moist. Gravel is subangular to angular chert with iron patina, 0.3- to 0.7-inch diameter	
19.7	20.0	Clayey Silt, 10YR7/2 (light gray), moderately hard, slightly plastic, and moist	
20.0	20.6	Silt with Sand. Sand is very fine quartz grains	
20.6	21.0	Clayey Silt as 19.7 to 20.0 ft	
21.0	25.0	Silty Gravelly Sand, 7.5YR6/4 (light brown), dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.7-inch diameter	
25.0	26.5	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains	
26.5	27.0	Sand with Gravel, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded chert with iron patina, 0.4- to 0.8-inch diameter	
27.0	27.4	Sand, 7.5YR7/6 (reddish yellow), very firm, and moist. Sand is fine quartz grains	
27.4	28.0	Silt with little Sand, 10YR7/3 (very pale brown), moderately soft, moderately plastic, and moist. Sand is coarse, rounded, chert grains	
28.0	30.1	Sandy Gravel, 7.5YR7/4 (pink), dense, and moist. Gravel is subrounded to subangular chert with and without iron patina, 0.3- to 0.7-inch diameter	
30.1	30.5	Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
30.5	30.9	Sandy Gravel, 10YR7/4 (very pale brown), dense, and moist. Gravel is subrounded to rounded chert with and without iron patina, 0.4- to 0.8-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
30.9	31.8	Sand as 30.1 to 30.5 ft	
31.8	32.5	Sandy Gravel, 10YR6/6 (brownish yellow), dense, and moist. Gravel is subrounded to subangular chert, 0.3- to 0.8-inch diameter. Sand is 90% fine quartz grains and 10% coarse, rounded, chert grains	
32.5	34.3	Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
34.3	35.3	Sandy Gravel as 31.8 to 32.5 ft	
35.3	35.5	Sand as 32.5 to 34.3 ft	
35.5	35.8	Sandy Gravel as 31.8 to 32.5 ft	
35.8	42.4	Silt, 10YR8/2 (very pale brown) with few 10YR7/6 (yellow) laminations, soft, nonplastic to slightly plastic, and moist	HU3
42.4	44.4	Silt with Sand, 10YR8/2 (very pale brown) with few 7.5YR7/6 (reddish yellow) laminations, soft, nonplastic, and moist. Sand is very fine quartz grains	
44.4	48.3	Sand, 10YR8/2 (very pale brown) with few 7.5YR7/6 (reddish yellow) laminations, firm, and moist. Sand is very fine quartz grains	
48.3	53.3	Sand with Silt interbeds, 10YR8/3 (very pale brown) mottled with 10YR8/2 (very pale brown), soft, nonplastic to moderately plastic, and moist. Sand is very fine quartz grains	
53.3	54.9	Sand, 10YR8/1 (white), firm, and moist. Sand is fine quartz grains	
54.9	57.5	Gravelly Sand, 10YR8/1 (white) with 2.5YR8/3 (pink) mottling, firm, and moist. Sand is fine quartz grains. Gravel is subangular to rounded chert without iron patina, 0.3- to 1.0-inch diameter	
57.5	57.9	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is very fine quartz grains	
57.9	61.6	Slightly Clayey Silt, 7.5YR8/1 (white) with 7.5YR7/4 (pink) laminations, soft, moderately plastic, and moist	
61.6	64.1	Sand, 10YR8/3 (very pale brown), loose, and wet. Sand is very fine quartz grains	
64.1	65.1	Silt, 10YR8/1 (white), soft, plastic, and moist	
65.1	66.8	Sand, 10YR8/1 (white), loose, and wet. Sand is fine quartz grains	HU4
66.8	67.5	Sandy Gravel, 10YR7/4 (very pale brown), loose, and moist. Gravel is subangular to subrounded chert with iron patina, 0.4- to 1.0-inch diameter. Sand is fine quartz grains	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.5	Silt, 10YR5/2 (grayish brown), soft, nonplastic, and moist. Zone of roots and humic material	Fill
0.5	1.8	Silty Gravel, 10YR4/1 (dark gray), loose, and moist. Gravel is subangular limestone (0.3- to 0.8-inch diameter (dense gravel aggregate/DGA)	
1.8	3.5	Silt, 10YR7/2 (light gray) with some 7.5YR7/6 (reddish yellow) mottling, soft, nonplastic, and moist	HU1
3.5	5.1	Silt, 10YR8/2 (very pale brown), hard, nonplastic, and dry	
5.1	12.6	Silt, 10YR7/1 (light gray) with some 7.5YR7/6 (reddish yellow) mottling, soft, nonplastic, and moist	
12.6	14.0	Silt, 10YR7/4 (very pale brown), moderately hard, nonplastic, and moist	
14.0	15.5	Silt with Sand, 10YR8/1 (white), moderately hard to hard, nonplastic, and dry. Sand is very fine quartz grains	
15.5	18.6	Sand with some Gravel, 7.5YR6/6 (reddish yellow), lightly consolidated, and moist. Sand is fine quartz grains. Gravel is rounded chert without iron patina, 0.8- to 1.0-inch diameter	HU2
18.6	23.5	Silt with Clay and some Gravel, 10YR7/1 (light gray), moderately hard, moderately plastic, and moist. Gravel is rounded chert without iron patina, 0.3- to 0.8-inch diameter	
23.5	24.3	Gravelly Sand, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is 90% fine quartz grains and 10% coarse, rounded, chert grains. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.4-inch diameter	
24.3	26.4	Silty Sand with some Gravel, 10YR7/3 (very pale brown), firm to dense, and moist. Sand is very fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.4-inch diameter	
26.4	26.9	Gravelly Sand, 7.5YR6/6 (reddish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.4-inch diameter	
26.9	27.4	Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
27.4	27.9	Clayey Silt with Sand, 10YR7/3 (very pale brown) mottled with 7.5YR7/4 (pink), moderately hard, moderately to slightly plastic, and moist. Sand is fine quartz grains	
27.9	28.2	Silt with Clay and some Gravel as at 18.6 to 23.5 ft	
28.2	28.4	Gravelly Sand as at 26.4 to 26.9 ft	
28.4	28.7	Silty Sand with some Gravel as at 24.3 to 26.4 ft	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
28.7	29.7	Silt with some Sand, 10YR7/6 (yellow) mottled with 10YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains	
29.7	30.9	Gravelly Sand, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded to rounded chert without iron patina, 0.3- to 0.4-inch diameter	
30.9	32.2	Sand, 10YR7/4 (very pale brown) finely mottled with 10YR8/1 (white), firm, and moist. Sand is fine quartz grains	
32.2	34.5	Silty Sandy Gravel, 7.5YR6/4 (light brown), dense, and moist. Gravel is subrounded to rounded chert without iron patina, 0.3- to 0.8-inch diameter. Sand is 70% fine quartz grains and 30% coarse, rounded, chert grains	
34.5	35.2	Gravelly Sand, 7.5YR6/6 (reddish yellow), dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subangular, chert grains. Gravel is subrounded chert without iron patina, 0.4- to 1.0-inch diameter	
35.2	43.2	Silt, 7.5YR8/1 (white) mottled with 7.5YR6/6 (reddish yellow) GRADING DOWN to 10YR7/3 (very pale brown), soft, nonplastic, and moist	HU3
43.2	49.4	Sand, 10YR8/2 (very pale brown) with some 10YR7/6 (yellow) staining, firm, and moist. Sand is very fine quartz grains	
49.4	49.9	Sand, 10YR7/6 (yellow) mottled with 10YR8/1 (white), firm, and moist. Sand is fine quartz grains	
49.9	50.3	Sand, 10YR8/3 (very pale brown) GRADING DOWN to 10YR8/6 (yellow), firm, and moist. Sand is very fine quartz grains	
50.3	51.6	Silt with Sand, 10YR8/1 (white) GRADING DOWN to 10YR7/8 (yellow), soft, nonplastic, and moist. Sand is very fine quartz grains	
51.6	54.7	Clay, 7.5YR7/4 (pink) GRADING DOWN to 10YR7/3 (very pale brown), soft, plastic, and moist	
54.7	55.0	Silty Sand with some Gravel, 10YR7/3 (very pale brown), firm, and moist. Sand is 90% fine quartz grains and 10% coarse, subrounded, chert grains. Gravel is subrounded chert without iron patina, 0.3- to 0.5-inch diameter	
55.0	55.4	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
55.4	57.0	Gravelly Sand, 10YR8/2 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is rounded to subrounded chert without iron patina, 0.3- to 0.5-inch diameter	

211-A-035

Plant North -2105.517, Plant East -5240.028

10/2/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
57.0	58.3	Sand, 7.5YR8/6 (reddish yellow), loose, and wet. Sand is very fine quartz grains	HU4
58.3	63.0	Silt, 10YR8/1 (white) with 10YR7/6 (yellow) laminations GRADING DOWN to massive 10YR8/1 (white), soft, plastic, and moist	
63.0	65.3	Sand, 10YR8/3 (very pale brown), lightly consolidated, and very moist. Sand is very fine quartz grains	
65.3	66.3	Silt, 10YR8/2 (very pale brown) with some 10YR7/6 (yellow) laminations, soft, plastic, and moist	
66.3	66.5	Sand, 7.5YR7/8 (reddish yellow), firm, and moist. Sand is very fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	0.6	Silt, 10YR3/1 (very dark gray), soft, nonplastic, and moist. Zone of roots and humic material	HU1
0.6	1.8	Silt, 10YR6/3 (pale brown), moderately hard, slightly plastic, and moist	
1.8	4.6	Silt, 10YR8/2 (very pale brown) with little mottling by 10YR7/6 (yellow), hard, nonplastic, and dry	
4.6	14.5	Silt, 10YR7/2 (light gray) with little 10YR7/6 (yellow) mottling, soft, nonplastic, and moist	
14.5	14.8	Sand, 10YR7/8 (yellow), firm to dense, and moist. Sand is very fine quartz grains	
14.8	16.5	Silt as 4.6 to 14.5 ft	
16.5	18.1	Silt with thin Sand interbeds, 10YR8/2 (very pale brown) GRADING DOWN to 7.5YR6/6 (reddish yellow). Silt is moderately soft, slightly plastic, and moist. Sand is fine quartz grains, firm, and moist	
18.1	20.1	Silt, 7.5YR7/4 (pink), soft, slightly plastic, and moist	
20.1	20.3	Silt with some Sand, 10YR7/3 (very pale brown), hard, nonplastic, and dry. Sand is very fine quartz grains	
20.3	25.5	Sand with Gravel and some Silt, 7.5YR7/3 (pink) with some 7.5YR3/1 (very dark gray) staining (manganese?), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.4-inch diameter	HU2
25.5	25.8	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is fine quartz grains	
25.8	26.1	Sand with Gravel and some Silt as 20.3 to 25.5 ft	
26.1	26.7	Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains	
26.7	27.1	Silty Sand with some Gravel, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 4 mm- to 0.4-inch diameter	
27.1	30.0	Silt, 10YR7/3 (very pale brown), mottled with 10YR8/1 (white), soft, plastic, and moist	
30.0	32.5	Disturbed soil (Sandy Silt with some Gravel)	
32.5	35.5	Gravelly Sand, 10YR5/6 (yellowish brown), firm, and moist. Sand is 80% fine quartz grains and 20% coarse, subangular to subrounded, chert grains. Gravel is subrounded chert with iron patina(?), 0.3- to 1.0-inch diameter	
35.5	42.9	Silt, 7.5YR8/1 (white) mottled with 7.5YR6/6 (reddish yellow) and 7.5YR8/6 (reddish yellow), soft, moderately plastic, and moist	
42.9	43.7	Sandy Silt, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, soft, nonplastic, and moist. Sand is very fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
43.7	47.4	Clayey Silt, 10YR8/2 (very pale brown) with 7.5YR7/4 (pink) laminations, moderately hard, plastic, and moist		HU3
47.4	49.9	Silt, 10YR8/2 (very pale brown) mottled with 7.5YR6/4 (light brown) and with slight 2.5YR7/6 (light red) staining, soft, plastic, and moist		
49.9	52.1	Sand, 10YR8/1 (very pale brown) with 10YR7/6 (yellow) laminations, firm, and moist. Sand is very fine quartz grains		
52.1	53.2	Silt, 10YR7/3 (very pale brown), soft to moderately soft, plastic, and moist		
53.2	55.0	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains		
55.0	56.0	Sand with Gravel, 10YR7/8 (yellow), firm, and moist. Sand is 80% fine quartz grains and 20% coarse-to-very-coarse, subrounded, chert grains. Gravel is subrounded chert without iron patina, 4 mm- to 0.4-inch diameter		
56.0	60.9	Interbedded Silt, 10YR8/1 (white), soft, moderately plastic, and moist AND very fine quartz Sand, 10YR8/1 (white) with few 10YR7/6 (yellow) laminations, lightly consolidated, and moist-to-wet		
60.9	62.3	Sand, 10YR8/1 (white), tinged with 10YR7/6 (yellow) at base, firm, and moist. Sand is very fine quartz grains		HU4
62.3	62.5	Sand with Gravel, 10YR7/6 (yellow), loose, and wet. Sand is fine to medium, rounded, quartz grains. Gravel is subrounded chert with iron patina, 0.4- to 0.8-inch diameter		

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	4.0	Gravelly Sand, 2.5YR6/6 (light red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.7-inch diameter	FILL
4.0	5.0	Silt, 10YR7/2 (light gray), soft, nonplastic, and moist	HU1
5.0	8.0	Permeameter sample - no description	NO DESCRIPTION
8.0	10.3	Silt as 4.0 to 5.0 ft	HU1
10.3	13.7	Silt with Sand, hard, nonplastic, and moist. Sand is very fine quartz grains	
13.7	15.0	Silt with little Clay and Gravel, 10YR7/2 (light gray) stained with 5YR5/4 (reddish brown), moderately hard, slightly plastic, and moist	
15.0	18.0	Permeameter sample - no description	NO DESCRIPTION
18.0	19.0	Gravelly Sand, 10YR7/4 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert without(?) iron patina, 0.3- to 0.7-inch diameter	HU2
19.0	20.0	Gravelly Sand with Silt, 10YR7/4 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert without(?) iron patina, 0.3- to 0.7-inch diameter	
20.0	23.1	Silt with some Sand and Gravel, 10YR6/4 (light yellowish brown), moderately hard, nonplastic, and moist. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.3- to 1.0-inch diameter	
23.1	25.1	Gravelly Sand, 10YR6/4 (light yellowish brown), dense and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert	
25.1	28.4	Silt, 10YR8/3 (very pale brown) mottled with 10YR8/1 (white), soft, nonplastic to slightly plastic, and moist	
28.4	33.0	Gravelly Sand, 10YR7/3 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with and without iron patina, 0.3- to 0.9-inch diameter	
33.0	33.4	Sand with little Gravel, firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert without(?) iron patina, 0.3- to 0.5-inch diameter	
33.4	35.0	Gravelly Sand, 10YR7/6 (yellow), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with and without iron patina, 0.3- to 0.9-inch diameter	
35.0	38.0	Permeameter sample - no description	NO DESCRIPTION
38.0	39.0	Silt, 10YR7/1 (light gray), soft, nonplastic, and moist	

211-B-001

Plant North -2607.698, Plant East -5240.899

10/9/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
39.0	40.0	Silt with Sand, 10YR7/4 (very pale brown), moderately soft, nonplastic, and moist. Sand is very fine quartz grains	HU3
40.0	47.0	Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 10YR7/4 (very pale brown), moderately soft, moderately plastic, and moist	
47.0	52.4	Silt with little Sand, soft, nonplastic to slightly plastic, and moist. Sand is very fine quartz grains	
52.4	56.5	Silt with little Clay, 7.5YR7/3 (pink) mottled with 7.5YR8/1 (white), moderately hard, slightly plastic, and moist	
56.5	59.4	Silt with Sand, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains	
59.4	61.6	Sand, 10YR8/4 (very pale brown), firm, and moist. Sand is fine quartz grains	HU4
61.6	62.3	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is fine quartz grains	
62.3	62.5	Sand, 7.5YR6/8 (reddish yellow), firm, and moist. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.5	Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is 85% fine quartz grains and 15% coarse, subrounded to subangular, chert grains. Gravel is subrounded to subangular chert with iron patina, 4-mm to 0.6-inch diameter	FILL
3.5	13.4	Silt, 10YR7/1 (light gray) with 10YR7/4 (very pale brown) mottling, soft, nonplastic, and moist	HU1
13.4	14.1	Sand, 10YR7/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
14.1	15.9	Silt with little Clay, 10YR7/3 (very pale brown) with little 10YR7/6 (yellow) mottling, moderately hard, slightly plastic, and moist	
15.9	17.0	Silt with little Clay and Gravel, 10YR7/3 (very pale brown) GRADING DOWN to 7.5YR6/6 (reddish yellow), moderately hard, slightly plastic, and moist. Gravel is rounded to subrounded chert without iron patina, 0.4- to 0.6-inch diameter	
17.0	17.5	Silt with some Clay, 10YR7/2 (light gray), soft, moderately plastic, and moist	
17.5	19.1	Gravelly Sand, 7.5YR7/4 (pink), dense, and moist. Sand is 70% fine quartz grains and 30% coarse to very coarse, subrounded, chert grains. Gravel is subangular to subrounded chert with iron patina, 4-mm to 0.5-inch diameter	HU2
19.1	19.5	Sand, 10YR7/6 (yellow), dense, and moist. Sand is fine quartz grains	
19.5	20.3	Gravelly Sand as 17.5 to 19.1 ft	
20.3	21.2	Silt with little Clay and Gravel as 15.9 to 17.0 ft	
21.2	23.0	Sand with some Gravel, 7.5YR6/4 (light brown), dense, and moist. Sand is 70% fine quartz grains and 30% coarse to very coarse, subrounded, chert grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
23.0	27.3	Silt with some Clay, 10YR7/1 (light gray) mottled with 10YR7/8 (yellow), soft, plastic, and moist	
27.3	28.4	Sand, 10YR7/8 (yellow), firm, and moist. Sand is fine quartz grains	
28.4	31.3	Silty Sand with Gravel, 7.5YR7/3 (pink), dense, and moist. Sand is fine to medium quartz grains. Gravel is subangular to subrounded chert with and without iron patina, 0.4- to 1.0-inch diameter	
31.3	33.3	Sand with some Gravel, 10YR7/4 (very pale brown) GRADING DOWN to 10YR8/1 (white), firm, and moist. Sand is fine to medium quartz grains. Gravel is subrounded chert without iron patina, 0.3- to 0.6-inch diameter	
33.3	38.5	Silt with Sand, 10YR8/3 (very pale brown), very soft, nonplastic, and moist. Sand is very fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
38.5	40.0	Silt with Sand, 10YR7/6 (yellow) mottled with 10YR8/1 (white), soft, nonplastic, and moist. Sand is fine quartz grains	HU3
40.0	42.4	Silt with little Clay, 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft, moderately plastic, and moist	
42.4	44.8	Silt, 10YR8/1 (white) mottled with 10YR7/8 (yellow), soft, nonplastic, and moist	
44.8	47.4	Silt with little Clay, 7.5YR7/4 (pink) with 7.5YR8/1 (white) mottling, moderately hard, moderately plastic, and moist	
47.4	50.4	Silt with Clay, 10YR7/4 (very pale brown) mottled with 10YR8/2 (very pale brown), moderately hard, moderately plastic, and moist	
50.4	51.0	Sand, 10YR7/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
51.0	52.5	Silt, 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft, moderately plastic, and moist	
52.5	56.0	Silt with little Clay, 7.5YR7/4 (pink) with little 7.5YR8/1 (white) mottling, moderately hard, slightly plastic, and moist	
56.0	59.0	Silt with some Clay, 7.5YR8/1 (white) mottled with 7.5YR7/3 (pink), soft, moderately plastic, and moist	
59.0	60.5	Sand, 10YR8/2 (very pale brown) with 10YR7/8 (yellow) laminations, lightly consolidated, and moist. Sand is very fine quartz grains	HU4
60.5	63.0	Sand, 10YR8/2 (very pale brown) with some 2.5YR7/4 (light reddish brown) and 7.5YR7/8 (reddish yellow) laminations, firm, and moist. Sand is fine quartz grains	
63.0	64.5	Sand with little Gravel, 10YR8/2 (very pale brown), loose, and wet. Sand is fine quartz grains. Gravel is rounded chert without iron patina, 0.3- to 0.4-inch diameter	
64.5	65.0	Sand, 10YR8/1 (white) with 7.5YR7/8 (reddish yellow) staining, loose, and wet. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.0	Fill: Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.8-inch diameter	Fill
3.0	13.6	Silt, 10YR7/1 (light gray) with 10YR7/6 (yellow) mottling, soft, nonplastic, and moist	HU1
13.6	15.9	Silt with little Clay and little Gravel, 10YR7/2 (light gray), moderately hard, slightly plastic, and moist. Gravel is subrounded chert without iron patina, 0.4- to 0.5-inch diameter	
15.9	16.9	Sandy Gravel with little Silt, 7.5YR7/2 (pinkish gray), dense, and moist. Gravel is subangular to rounded chert with and without iron patina, 4 mm- to 0.7-inch diameter. Sand is fine quartz grains	
16.9	17.8	Sand with little Gravel, 10YR7/3 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert without(?) iron patina, 0.4- to 0.6-inch diameter	HU2
17.8	20.1	Sandy Silt with little Gravel and little Clay, 10YR7/2 (light gray), moderately hard, nonplastic, and moist. Sand is fine quartz grains. Gravel is subangular to angular chert without iron patina, 0.4- to 0.8-inch diameter	
20.1	22.3	Gravelly Sand with little Silt, 7.5YR6/4 (light brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert without(?) iron patina, 0.3- to 0.6-inch diameter	
22.3	22.9	Sand, 10YR7/8 (yellow), firm, and moist. Sand is fine quartz grains	
22.9	27.0	Silt with Sand, 10YR8/4 (very pale brown) mottled with 10YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains	
27.0	27.4	Sand, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains	
27.4	28.9	Sand with little Gravel, 10YR7/4 (very pale brown) GRADING DOWN to 10YR8/1 (white), firm, and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert with and without iron patina, 0.3- to 0.8-inch diameter	
28.9	30.4	Sand with Gravel, 10YR7/3 (very pale brown), dense, and moist. Sand is 75% fine quartz grains and 25% coarse, subrounded, chert grains. Gravel is subrounded to subangular chert without(?) iron patina, 0.3- to 0.4-inch diameter	
30.4	31.4	Sand, 10YR7/6 (yellow), firm to dense, and moist. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
31.4	33.0	Sand with Gravel, 7.5YR6/4 (light brown), dense, and moist. Sand is fine to medium quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.4-inch diameter	HU3
33.0	35.9	Silt, 7.5YR7/3 (pink) GRADING DOWN to 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, nonplastic, and moist	
35.9	36.7	Silt with Sand, 7.5YR7/4 (pink), soft, nonplastic, and moist. Sand is very fine quartz grains	
36.7	38.8	Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is very fine quartz grains	
38.8	40.1	Sand, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains	
40.1	42.5	Silt with little Clay, 7.5YR7/4 (pink) with 7.5YR8/1 (white) mottling, moderately soft, moderately plastic, and moist	
42.5	47.0	Silt with some Clay, 7.5YR7/3 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 7.5YR7/4 (pink), moderately hard, slightly plastic, and moist	
47.0	51.0	Silt with Sand, 10YR7/4 (very pale brown) with some 7.5YR8/1 (white) mottling, soft, nonplastic, and moist. Sand is very fine quartz grains	
51.0	54.0	Silt with little Clay, 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft to moderately soft, moderately plastic, and moist	
54.0	56.3	Silt, 7.5YR6/6 (reddish yellow) mottled with 7.5YR8/1 (white), moderately hard, nonplastic, and moist	
56.3	58.5	Silt with Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, moderately soft, nonplastic, and moist. Sand is very fine quartz grains	
58.5	60.0	Sand, 10YR8/2 (very pale brown) GRADING DOWN to 7.5YR8/4 (pink), firm, and moist. Sand is very fine quartz grains	HU4

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.6	Fill: Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	Fill
3.6	7.5	Silt, 10YR7/1 (light gray) with some 10YR7/6 (yellow) mottling, soft, nonplastic, and moist	HU1
7.5	10.0	Permeameter Sample - No Description	
10.0	12.5	Silt as 3.6 to 7.5 ft	
12.5	13.3	Sand, 10YR8/4 (very pale brown), dense, and moist. Sand is very fine quartz grains	
13.3	14.7	Silt, 10YR7/4 (very pale brown), soft, slightly plastic, and moist	
14.7	15.0	Silt with little Gravel and little Clay, 10YR7/2 (light gray) mottled with 7.5YR6/6 (reddish yellow), moderately hard, slightly to moderately plastic, and moist. Gravel is subangular chert without iron patina, 0.3-inch diameter	
15.0	15.5	Slough: Silt, 10YR7/2 (light gray), very soft, nonplastic, and moist	
15.5	17.2	Silt with little Clay and little Gravel, 7.5YR7/2 (pinkish gray) with 7.5YR7/6 (reddish yellow) staining, moderately hard, moderately plastic, and moist. Gravel is subrounded to subangular chert without iron patina, 0.3- to 1.0-inch diameter	
17.2	17.5	Sand with Gravel, 7.5YR7/4 (pink), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with(?) iron patina, 0.4- to 0.6-inch diameter	
17.5	20.0	Permeameter Sample - No Description - Appeared similar to Sand with Gravel of 17.2 to 17.5 ft	
20.0	21.1	Silt with little Clay and little Gravel as 15.5 to 17.2 ft	HU2
21.1	23.8	Sand with Gravel, 7.5YR7/4 (pink), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert without(?) iron patina, 0.3- to 0.5-inch diameter	
23.8	24.2	Sand, 7.5YR7/4 (pink), firm, and moist. Sand is fine to medium quartz grains	
24.2	24.6	Silt with some Gravel, 10YR7/1 (light gray) with 7.5YR7/6 (reddish yellow) staining, soft, plastic, and moist. Gravel is subrounded chert without(?) iron patina, 1.0-inch diameter	
24.6	26.0	Sand, 10YR8/2 (very pale brown) GRADING DOWN to 10YR8/4 (very pale brown), dense, and moist. Sand is fine quartz grains	
26.0	26.5	Gravelly Sand with Silt, 10YR7/6 (yellow), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.3- to 0.6-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
26.5	28.5	Silt with Sand, 10YR7/4 (very pale brown) mottled with 10YR8/1 (white), soft, nonplastic, and moist. Sand is fine quartz grains	HU3
28.5	30.0	Sand with Gravel, 10YR8/3 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 4 mm- to 0.6-inch diameter	
30.0	31.9	Sand with Gravel and some Silt, 7.5YR6/6 (reddish yellow). Sand is 80% fine to medium quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded to subangular chert without(?) iron patina, 4 mm- to 0.5-inch diameter	
31.9	32.7	Silt with Clay, 7.5YR6/6 (reddish yellow), moderately soft, plastic, and moist	
32.7	42.4	Silt, 7.5YR6/6 (reddish yellow) GRADING DOWN to 10YR7/6 (yellow) and then to 10YR8/3 (very pale brown), soft, slightly plastic, and moist	
42.4	50.0	Silt with little Clay, 7.5YR8/4 (pink) with some 7.5YR7/6 (reddish yellow) mottling, moderately soft, plastic, and moist	
50.0	52.1	Silt with Sand, 10YR8/1 (white) with 10YR8/6 (yellow) laminations, soft, nonplastic, and moist. Sand is fine quartz grains	
52.1	54.6	Silt with Sand, 5YR8/2 (pinkish white), soft, nonplastic, and moist. Sand is very fine quartz grains	
54.6	55.4	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is very fine to fine quartz grains	
55.4	56.8	Silt with Sand, 10YR7/6 (yellow) mottled with 10YR8/1 (white), soft, nonplastic, and moist. Sand is fine quartz grains	
56.8	57.5	Silt with some Clay, 7.5YR7/3 (pink) mottled with 7.5YR8/1 (white), moderately hard, slightly plastic, and moist	
57.5	61.0	Silt with Sand, 7.5YR8/1 (white) mottled with 5YR6/6 (reddish yellow), soft, nonplastic, and moist. Sand is fine quartz grains	
61.0	64.6	Sand, 10YR8/3 (very pale brown), loose, and wet. Sand is fine quartz grains	HU4
64.6	65.0	Sand with Gravel, 10YR8/2 (very pale brown), firm and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 1.0-inch diameter	HU5

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.2	Fill: Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert with iron patina, 0.4- to 0.7-inch diameter	Fill
1.2	2.5	Silt with Gravel, 5YR7/3 (pink), soft, plastic, and moist. Gravel is rounded to subrounded chert with iron patina, 0.3- to 0.8-inch diameter	
2.5	13.1	Silt, 10YR7/1 (light gray) GRADING DOWN to 10YR7/4 (very pale brown) mottled with 10YR7/1 (light gray), soft, nonplastic, and moist	HU1
13.1	13.7	Sand, 10YR8/2 (very pale brown), dense, and moist. Sand is very fine quartz grains	HU2
13.7	14.4	Silt with little Clay, 10YR6/4 (light yellowish brown), GRADING DOWN to 10YR7/1 (light gray), moderately hard, moderately plastic, and moist	
14.4	17.3	Sand with Gravel and little Silt, 10YR8/1 (white) mottled with 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 1.0-inch diameter	
17.3	18.2	Sand with Gravel, 10YR7/4 (very pale brown), dense, and moist. Sand is 70% fine quartz grains and 30% coarse to very coarse, subrounded, chert grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.4-inch diameter	
18.2	19.7	Silt, 10YR7/6 (yellow) mottled with 10YR8/1 (white), moderately soft, slightly plastic, and moist	
19.7	23.3	Sand with Gravel, 10YR6/6 (brownish yellow), dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.8-inch diameter	
23.3	24.1	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
24.1	26.7	Silt, 10YR8/4 (very pale brown) GRADING DOWN to 10YR8/4 (very pale brown) mottled with 10YR8/1 (white), soft, plastic, and moist	
26.7	29.2	Sand, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains	
29.2	30.6	Sand with some Gravel, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert without(?) iron patina, 0.3- to 0.5-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
30.6	31.7	Gravelly Sand with little Silt, 10YR7/4 (very pale brown), dense, and moist. Sand is 60% fine to medium quartz grains and 40% coarse to very coarse, subrounded, chert grains. Gravel is subrounded chert with(?) iron patina, 0.3- to 0.5-inch diameter	HU3
31.7	35.5	Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, moderately plastic, and moist	
35.5	39.2	Silt with Sand, 10YR8/6 (yellow) mottled with 10YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains	
39.2	43.1	Silt with little Clay, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, plastic, and moist	
43.1	46.6	Silt with little Clay as above but moderately hard and slightly plastic	
46.6	48.6	Sand, 10YR8/1 (white) with some 10YR7/4 (very pale brown) mottling, firm, and moist. Sand is fine quartz grains	
48.6	49.6	Silt with Sand, 10YR8/2 (very pale brown) GRADING DOWN to 10YR7/6 (yellow), soft to moderately soft, moderately plastic, and moist. Sand is very fine quartz grains	
49.6	52.3	Sand with little Silt, 10YR6/6 (brownish yellow), firm, and moist. Sand is very fine to fine sand	
52.3	53.1	Silt, 10YR8/3 (very pale brown), soft, nonplastic, and moist	
53.1	54.5	Sand, 10YR8/2 (very pale brown) with 10YR6/6 (brownish yellow) laminations, firm, and moist. Sand is very fine quartz grains	
54.5	57.5	Silt with little Clay, 7.5YR8/1 (white) mottled with 7.5YR7/6 (reddish yellow), moderately hard, slightly plastic, and moist	
57.5	59.4	Interbedded Sand and Silt, 7.5YR7/3 (pink). Sand is fine quartz grains, firm and moist. Silt is soft, plastic, and moist	
59.4	62.3	Sand, 7.5YR7/4 (pink), firm to loose, and very moist to wet. Sand is fine quartz grains	
62.3	62.5	Silt, 10YR8/3 (pink), soft, moderately plastic, and moist	
62.5	64.6	Sand with little Gravel, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains. Gravel is rounded to subrounded chert without iron patina, 0.7- to 1.0-inch diameter	
64.6	65.0	Sand, 10YR8/1 (white), firm, and very moist. Sand is very fine quartz grains	HU4

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.2	Fill: Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.4- to 0.6-inch diameter	Fill
3.2	12.4	Silt, 10YR7/1 (light gray) with some 10YR7/4 (very pale brown) mottling GRADING DOWN to 10YR7/4 (very pale brown) with 10YR7/1 (light gray) mottling, soft, nonplastic, and moist	HU1
12.4	16.4	Sand with little Gravel, 10YR8/2 (very pale brown) mottled with 10YR6/4 (light yellowing brown), firm to dense, and moist. Sand is very fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.4-inch diameter	HU2
16.4	18.8	Silt with little Clay and little Gravel, 10YR7/1 (light gray) with 10YR7/4 (very pale brown) mottling, moderately hard, slightly to moderately plastic, and moist. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.7-inch diameter	
18.8	20.3	Sand with Gravel, 10YR7/4 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert (and trace of feldspar) without iron patina, 0.3- to 0.4-inch diameter.	
20.3	20.9	Silt with Sand and little Gravel, 10YR7/2 (light gray), moderately hard, nonplastic, and moist. Sand is fine quartz grains	
20.9	21.7	Sand with Gravel as 18.8 to 20.3 ft	
21.7	24.5	Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), moderately soft, moderately plastic, and moist	
24.5	27.2	Silt with Sand, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains	
27.2	34.0	Gravelly Sand (85% fine quartz grains and 15% coarse, subrounded, chert grains) with 0.3- to 0.4-ft interbeds of fine Sand, 10YR7/4 (very pale brown); dense, and moist. Gravel is subrounded to rounded chert with and without iron patina, 0.3- to 0.7-inch diameter	
34.0	35.2	Silt with Clay, 7.5YR7/4 (pink), moderately hard, slightly plastic, and moist	
35.2	36.2	Silt, 10YR8/2 (very pale brown), soft, nonplastic, and moist	
36.2	37.7	Silty Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains	
37.7	38.2	Sand, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
38.2	40.0	Silt, 10YR8/3 (very pale brown) with 5YR7/8 (light red) laminations, soft to moderately soft, nonplastic, and moist	HU3
40.0	44.9	Silt, 7.5YR6/2 (pinkish gray) mottled with 7.5YR7/6 (reddish yellow) GRADING DOWN to 7.5YR7/2 (pinkish gray) with 7.5YR7/4 (pink) mottling, moderately hard, moderately plastic, and moist	
44.9	48.0	Silty Sand GRADING DOWN to Sand, 10YR7/3 (very pale brown) with 10YR7/4 (very pale brown) laminations/mottling, firm, and moist. Sand is very fine quartz grains	
48.0	49.4	Sand, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains	
49.4	55.5	Silt with little Clay, 7.5YR8/2 (pinkish white) mottled with 7.5YR7/6 (reddish yellow), moderately soft, plastic to moderately plastic, and moist	
55.5	58.0	Silt with little Clay, 7.5YR7/4 (pink) with little 7.5YR8/1 (white) mottling, moderately hard, slightly plastic, and moist	
58.0	58.5	Silt with little Clay as 55.5 to 58.0 ft but colored 7.5YR8/2 (pinkish white)	
58.5	61.7	Sand with some Silt blebs, 10YR7/6 (yellow) and dense, GRADING DOWN to 10YR8/2 (very pale brown) and lightly consolidated; and moist. Sand is very fine quartz grains	HU4
61.7	62.3	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
62.3	62.5	Sand with Gravel, 10YR7/3 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.6	Gravelly Sand, 2.5YR6/6 (red), dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.5-inch diameter	Fill
2.6	3.2	Silty Sand with Gravel, 5YR7/4 (pink), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 1.0-inch diameter	
3.2	14.4	Silt, 10YR8/2 (very pale brown) with little 10YR7/6 (yellow) mottling GRADING DOWN to 10YR7/4 (very pale brown), soft, nonplastic, and moist	
14.4	15.0	Silt GRADING DOWN to Sand, 10YR8/1 (white) GRADING DOWN to 10YR8/4 (very pale brown), moderately soft/firm, nonplastic, and moist. Sand is very fine quartz grains	HU1
15.0	19.6	Silt with Clay and some Gravel, 10YR7/1 (light gray) with little 10YR7/4 (very pale brown) mottling, moderately soft/stiff, slightly to moderately plastic, and moist. Gravel is rounded to subrounded chert without iron patina, 0.3- to 0.4-inch diameter	
19.6	20.0	Silt with Sand, 10YR7/6 (yellow), moderately soft, nonplastic, and moist. Sand is fine quartz grains	
20.0	20.3	Silt with Clay and some Gravel as 15.0 to 19.6 ft	
20.3	23.0	Sand with Gravel, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.5-inch diameter	
23.0	24.9	Silty Sand, 10YR8/6 (yellow) mottled with 10YR8/1 (white), firm, and moist. Sand is very fine quartz grains	HU2
24.9	25.1	Sand, 7.5YR7/8 (reddish yellow), firm, and moist. Sand is fine quartz grains	
25.1	26.4	Silty Sand as 23.0 to 24.9 ft	
26.4	32.0	Gravelly Sand, 7.5YR7/4 (pink), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
32.0	34.6	Gravelly Sand with little Silt, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
34.6	35.5	Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is very fine to fine quartz grains	
35.5	45.0	Silt, 7.5YR8/4 (pink) with 7.5YR7/6 (reddish yellow) laminations GRADING DOWN to 7.5YR8/2 (pinkish white) with 7.5YR7/6 (reddish yellow) laminations, very soft, nonplastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
45.0	46.4	Silty Sand, GRADING DOWN to Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations/mottling, firm, and moist. Sand is very fine quartz grains	HU3
46.4	48.2	Sand, 7.5YR8/1 (white) with 7.5YR7/6 (reddish yellow) mottling and staining, firm, and moist. Sand is fine quartz grains	
48.2	49.6	Gravelly Sand, 10YR7/3 (very pale brown), dense, and moist. Sand is 85% fine quartz grains and 15% coarse, subrounded, chert grains. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.6-inch diameter	
49.6	50.0	Silt with little Clay, 7.5YR7/6 (reddish yellow), moderately hard, slightly plastic, and moist	
50.0	51.4	Silt, 7.5YR8/4 (pink) with 7.5YR8/1 (white) mottling, soft, plastic, and moist	
51.4	54.5	Silt with Sand, 7.5YR8/1 (white) mottled with 7.5YR7/6 (reddish yellow), soft, nonplastic, and moist. Sand is very fine quartz grains	
54.5	58.6	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, moderately plastic to plastic, and moist	
58.6	61.0	Silty Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) and 5YR7/6 (reddish yellow) laminations, firm, and moist. Sand is very fine quartz grains	
61.0	64.7	Sand with few Silt blebs, 10YR8/1 (white) GRADING DOWN to 10YR8/4 (very pale brown), firm to loose, and moist to wet. Sand is fine quartz grains	HU4
64.7	65.0	Sand, 7.5YR7/6 (reddish yellow), lightly consolidated, and wet. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.7	Sand with Gravel/Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is 90% fine quartz grains and 10% coarse, subrounded, chert grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	Fill
2.7	13.1	Silt, 10YR7/1 (light gray) with some 10YR7/6 (yellow) mottling, soft, nonplastic, and moist	HU1
13.1	14.8	Interbedded fine Sand, 7.5YR6/6 (reddish yellow) and very fine Sand (7.5YR8/1 (white), firm, and moist. Sand is quartz grains	
14.8	17.0	Gravelly Sand, 7.5YR5/6 (strong brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 4 mm- to 0.6-inch diameter	
17.0	17.7	Sand, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is fine quartz grains	
17.7	21.3	Gravelly Sand as 14.8 to 17.0 ft	
21.3	21.7	Sand with Gravel, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.6-inch diameter	
21.7	22.3	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
22.3	26.0	Silt, 10YR8/4 (Very pale brown) mottled with 10YR8/1 (white), soft, plastic to moderately plastic, and moist	
26.0	27.1	Sand with little Gravel, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	HU2
27.1	28.0	Gravelly Sand, 10YR8/1 (white) mottled with 10YR8/4 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with iron patina, 4 mm- to 0.4-inch diameter	
28.0	28.8	Sand, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains	
28.8	30.0	Sandy Gravel, 10YR8/2 (very pale brown), dense, and moist. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.6-inch diameter	
30.0	30.8	Sandy Gravel as 28.8 to 30.0 ft but with Silt	
30.8	32.4	Sandy Gravel as 28.8 to 30.0 ft	
32.4	37.0	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 7.5YR8/2 (pinkish white), soft, plastic to moderately plastic, and moist	
37.0	40.8	Silt with Clay, 7.5YR7/3 (pink) mottled with 7.5YR8/1 (white), soft, plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
40.8	41.7	Silt with Clay as 37.0 to 40.8 ft but very soft	HU3
41.7	43.0	Silt with Clay, 7.5YR7/3 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 10YR8/2 (very pale brown), moderately hard, moderately plastic, and moist	
43.0	47.4	Silt with Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), moderately soft with blebs of both moderately hard and soft, slightly to moderately plastic, and moist	
47.4	49.5	Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains. Note: 49.2 to 49.5 ft contains some chert gravel with iron patina, subrounded, 0.3-inch diameter	
49.5	55.1	Silt with Clay, 7.5YR6/6 (reddish yellow) mottled with 7.5YR8/1 (white), moderately hard, slightly plastic, and moist	
55.1	58.0	Silt with Sand, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) GRADING DOWN to 10YR8/3 (very pale brown), soft, slightly plastic, and moist. Sand is fine quartz grains	
58.0	58.5	Sand, 10YR8/6 (yellow), firm, and moist. Sand is very fine quartz grains	HU4
58.5	60.2	Sand, 10YR8/4 (very pale brown), firm, and moist. Sand is fine quartz grains	
60.2	60.5	Sand with Silt and Gravel, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains. Gravel is rounded chert without iron patina, 0.3-inch diameter	
60.5	62.0	Sand with a few Silt interbeds, 10YR8/2 (very pale brown), lightly consolidated to firm, and moist. Sand is fine quartz grains	
62.0	62.1	Sandy Gravel, 10YR7/4 (very pale brown), loose, and moist. Gravel is subrounded chert with iron patina, 0.3-inch diameter. Sand is fine quartz grains	
62.1	62.5	Sand with a few Silt interbeds as 60.5 to 62.0 ft	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.4	Gravelly Sand with little Silt, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.8-inch diameter	FILL
2.4	14.2	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, nonplastic, and moist	HU2
14.2	15.2	Clayey Silt, 10YR7/2 (light gray), moderately hard, moderately plastic, and moist	
15.2	16.7	Silty Sand, 10YR7/1 (light gray), firm, and moist. Sand is very fine quartz grains	
16.7	20.1	Gravelly Sand with little Silt, 10YR6/4 (light yellowish brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with and without iron patina, 0.3 - to 0.6-inch diameter	HU2
20.1	21.2	Silty Sand with Gravel, 10YR7/1 (light gray), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded chert without iron patina, 0.5- to 0.8-inch diameter	
21.2	23.5	Gravelly Sand with little Silt, 10YR6/6 (brownish yellow), dense, and moist. Sand is 90% fine quartz grains and 10% subrounded, coarse, chert grains. Gravel is subrounded chert with and without iron patina, 0.3- to 0.5-inch diameter	
23.5	26.7	Sand, 10YR8/1 (white) with 10YR7/6 (yellow) mottling, firm, and moist. Sand is very fine quartz grains	
26.7	29.5	Gravelly Sand, 10YR8/2 (very pale brown) GRADING DOWN to 10YR7/6 (yellow), dense, and moist. Sand is 90% fine quartz grains and 10% coarse, subrounded, chert grains. Gravel is subrounded chert with and without iron patina, 4-mm to 0.6-inch diameter	
29.5	30.2	Gravelly Sand with Silt, 7.5YR7/1 (light gray), dense, and moist. Sand is 90% fine quartz grains and 10% coarse, subrounded, chert grains. Gravel is subrounded chert with and without iron patina, 4-mm to 0.6-inch diameter	
30.2	31.0	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
31.0	34.0	Gravelly Sand as 26.7 to 29.5 ft	
34.0	35.0	Silty Clay, 7.5YR7/4 (pink) with 7.5YR8/1 (white) mottling, soft, plastic, and moist	
35.0	37.6	Silt with Sand, 10YR7/2 (light gray) with little 10YR7/6 (yellow) mottling, soft, nonplastic, and moist. Sand is very fine quartz grains	
37.6	39.1	Silt with little Clay, 7.5YR8/1 (white) mottled with 7.5YR7/6 (reddish yellow), soft, plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
39.1	42.7	Silt with little Clay as 37.6 to 39.1 ft interbedded with Clay with Silt, 10YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white) and 7.5YR7/4 (pink), soft, plastic, and moist	HU3
42.7	45.5	Silt, 7.5YR7/6 (reddish yellow), moderately soft, nonplastic, and moist	
45.5	46.7	Silt with some Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) and 7.5YR6/1 (gray), soft to moderately soft, plastic, and moist	
46.7	52.3	Silt with Sand, 10YR7/6 (yellow) mottled with 10YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains	
52.3	54.5	Silt with little Clay, 7.5YR6/6 (reddish yellow) with some 7.5YR8/1 (white) mottling, moderately soft, slightly plastic, and moist	
54.5	55.0	Silt with little Clay, 7.5YR6/6 (reddish yellow) with some 7.5YR8/1 (white) mottling, soft, plastic, and moist	
55.0	59.1	Silt with Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow)-GRADING-DOWN-to-7.5YR7/4 (pink) laminations, soft, nonplastic, and moist. Sand is fine quartz grains	
59.1	60.3	Sand, 10YR8/4 (very pale brown), firm, and moist. Sand is very fine quartz grains	HU4
60.3	62.5	Sand, 10YR8/2 (very pale brown), lightly consolidated, and moist. Sand is very fine quartz grains	
62.5	63.1	Sand with some Gravel, 10YR8/2 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert without iron patina, 0.3- to 0.4-inch diameter	
63.1	64.0	Sand, 7.5YR7/8 (reddish yellow), firm, and moist. Sand is fine quartz grains	
64.0	65.0	Sand with Gravel, 10YR8/2 (very pale brown), loose, and wet. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.3- to 0.8-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.5	Fill: Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	Fill
2.5	14.7	Silt, 10YR7/1 (light gray) with some 10YR7/4 (very pale brown) mottling, soft, nonplastic, and moist	HU1
14.7	16.0	Clayey Silt with little Gravel, 10YR7/1 (light gray) with 10YR6/1 (gray) mottling, moderately hard, moderately plastic, and moist. Gravel is subrounded chert without iron patina, 0.3-inch diameter	
16.0	16.5	Clayey Silt, 10YR7/1 (light gray) with 10YR6/1 (gray) mottling, moderately hard, moderately plastic, and moist 0.3-inch diameter	
16.5	17.9	Sand with little Gravel, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is 90% fine quartz grains and 10% coarse, rounded, chert grains. Gravel is rounded to subrounded chert with iron patina, 0.4- to 0.6-inch diameter	
17.9	19.0	Clayey Silt with little Gravel, 10YR7/1 (light gray) with 10YR6/1 (gray) mottling, moderately hard, moderately plastic, and moist. Gravel is subrounded chert without iron patina, 0.3- to 0.4-inch diameter	HU2
19.0	20.0	Crushed sample sleeve: 19.0 to 19.6 = Clayey Silt with little Gravel as above and 19.6 to 20.0 ft = Sand with Gravel and little Silt as below	
20.0	20.6	Sand with Gravel and little Silt, 7.5YR6/6 (reddish yellow), dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded to rounded chert with iron patina, 4 mm- to 0.3-inch diameter	
20.6	21.2	Silt with Sand, 10YR8/2 (very pale brown), soft, nonplastic, and moist. Sand is fine quartz grains	
21.2	26.0	Silt with Sand as above but with little Gravel. Gravel is subrounded to rounded chert without(?) iron patina, 0.3- to 0.4-inch diameter	
26.0	31.5	Gravelly Sand with little Silt, 10YR7/6 (yellow) GRADING DOWN to 7.5YR7/4 (pink), dense, and very moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subangular to subrounded chert with iron patina, 4 mm- to 0.8-inch diameter	
31.5	37.0	Silt with Sand, 7.5YR8/4 (pink) mottled with 7.5YR8/1 (white), very soft, nonplastic to slightly plastic, and moist. Sand is very fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
37.0	45.0	Silt, 7.5YR7/6 (reddish yellow) with 7.5YR8/1 (white) mottling GRADING DOWN to 7.5YR8/1 (white) with 7.5YR7/4 (pink) mottling, soft, slightly plastic, and moist	HU3
45.0	47.2	Silty Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is very fine quartz grains	
47.2	49.9	Silt with little Clay and some Gravel, 10YR7/4 (very pale brown) mottled with 10YR8/1 (white), moderately soft, plastic, and moist. Gravel is subrounded to subangular chert without iron patina, 0.4- to 0.8-inch diameter	
49.9	50.2	Sand with some Gravel, 10YR6/6 (brownish yellow), firm, and moist. Sand is fine quartz grains	
50.2	54.0	Silt, 10YR7/4 (very pale brown) mottled with 10YR8/1 (white) GRADING DOWN to 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft, moderately plastic, and moist	
54.0	55.0	Clay, 7.5YR7/4 (pink) with some 7.5YR8/1 (white) mottling, moderately hard, plastic, and moist	
55.0	56.1	Clay as above	
56.1	59.5	Silt with Sand, 7.5YR7/4 (pink) GRADING DOWN to 7.5YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains	HU4
59.5	60.0	Sand, 10YR8/3 (very pale brown), lightly consolidated, and moist. Sand is very fine quartz grains	
60.0	60.9	Sand as above but colored 7.5YR7/4 (pink)	
60.9	62.5	Sand as 59.5 to 60.0 ft but colored 7.5YR8/2 (pinkish white) GRADING DOWN to 7.5YR8/1 (white)	
62.5	64.2	Sand with some Gravel, 10YR8/1 (white) GRADING DOWN to 10YR8/3 (very pale brown), firm, and wet. Sand is 90% very fine quartz grains and 10% coarse, subrounded, chert grains. Gravel is subangular to subrounded chert without iron patina, 4 mm- to 0.4-inch diameter	
64.2	65.0	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is very fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.1	Fill: Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	Fill
2.1	13.7	Silt, 10YR7/1 (light gray) with 10YR7/4 (very pale brown) mottling, soft, nonplastic, and moist	HU1
13.7	15.4	Silt with some Gravel and little Clay, 10YR7/2 (light gray), moderately soft, moderately plastic, and moist. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter	
15.4	16.4	Sandy Gravel, 10YR6/3 (pale brown), dense, and moist. Gravel is subrounded chert with iron patina, 0.3- to 0.5-inch diameter. Sand is fine quartz grains	
16.4	18.2	Silt with some Gravel and little Clay, 10YR7/2 (light gray), moderately soft, moderately plastic, and moist. Gravel is subangular chert without iron patina, 0.4- to 0.5-inch diameter	
18.2	21.9	Gravelly Sand with little Silt, 7.5YR7/4 (pink), dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded to rounded chert with and without iron patina, 0.3- to 0.6-inch diameter	
21.9	22.4	Sand, 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains	HU2
22.4	24.6	Silt, 10YR8/6 (yellow) mottled with 10YR8/1 (white), soft, slightly plastic, and moist	
24.6	29.2	Sandy Silt with little Gravel, 10YR7/3 (very pale brown), moderately soft, nonplastic, and moist. Gravel is subrounded chert without iron patina, 0.6- to 1.0-inch diameter	
29.2	31.6	Sandy Gravel with little Silt, 7.5YR7/4 (pink) with some 7.5YR5/1 (gray) staining (manganese?), dense, and moist. Gravel is subangular to subrounded chert without(?) iron patina, 0.3- to 1.0-inch diameter. Sand is 75% fine quartz grains and 25% coarse to very coarse, subrounded to rounded, chert grains	
31.6	32.2	Sand, 7.5YR7/8 (reddish yellow), firm, and moist. Sand is fine quartz grains	
32.2	34.3	Silt with little Clay, 7.5YR7/6 (reddish yellow) with little 7.5YR8/1 (white) mottling, soft, nonplastic, and moist	
34.3	40.0	Silt, 10YR7/4 (very pale brown) mottled with 10YR8/1 (white), very soft, nonplastic, and moist	
40.0	40.8	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, moderately plastic, and moist	
40.8	42.0	Silt as 34.3 to 40.0 ft	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
42.0	42.4	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white) and 2.5YR6/8 (light red), moderately soft, slightly plastic, and moist	HU3
42.4	45.9	Silt, 7.5YR7/4 (pink) GRADING DOWN to 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft, nonplastic, to slightly plastic, and moist	
45.9	50.1	Silt with Sand, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, nonplastic to slightly plastic, and moist. Sand is very fine quartz grains	
50.1	51.6	Sand, 10YR8/1 (white) GRADING DOWN to 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains	
51.6	52.8	Sand, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains	
52.8	54.4	Sandy Silt, 7.5YR7/3 (pink), soft, nonplastic, and moist	
54.4	58.0	Silt with Clay, 7.5YR7/4 (pink) with 7.5YR8/1 (white) mottling, moderately hard, moderately plastic, and moist	
58.0	60.3	Silt with Sand, 10YR8/2 (very pale brown) GRADING DOWN to 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains	
60.3	62.5	Sand, 10YR8/1 (white), lightly consolidated, and moist. Sand is very fine quartz grains	HU4
62.5	62.7	Gravel with Sand and Silt, 10YR7/8 (yellow), firm, and moist. Gravel is subrounded chert with(?) iron patina, 0.6- to 1.0-inch diameter. Sand is very fine quartz sand	
62.7	63.1	Sand, 10YR8/1 (white), loosely consolidated, and moist. Sand is fine quartz grains	
63.1	63.3	Silty Clay, 10YR7/3 (very pale brown), soft, plastic, and moist	
63.3	67.5	Sand, 10YR8/2 (very pale brown) with 7.5YR7/8 (reddish yellow) laminations, firm, and moist. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.1	Fill: Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 4 mm- to 0.5-inch diameter	Fill
3.1	15.2	Silt, 10YR7/2 (light gray) mottled with 10YR7/4 (very pale brown), soft, nonplastic to slightly plastic, and moist	HU1
15.2	18.6	Silt with little Clay and little Gravel, 10YR7/2 (light gray) with some 10YR7/3 (very pale brown) mottling, moderately hard, moderately plastic, and moist. Gravel is rounded to subangular chert without iron patina, 0.3-inch diameter	
18.6	18.9	Gravelly Sand with little Silt, 10YR5/4 (yellowish brown), firm, and slightly moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert without(?) iron patina, 4 mm- to 0.4-inch diameter	HU2
18.9	19.9	Silty Sand with some Gravel, 10YR7/2 (light gray), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.4-inch diameter	
19.9	21.4	Silty Sand with little Gravel, 7.5YR7/2 (pinkish gray), firm, and moist. Sand consists of 70% fine quartz grains and 30% very coarse, subrounded, chert grains. Gravel is subrounded chert without(?) iron patina, 4 mm- to 0.3-inch diameter	
21.4	22.6	Sand, 7.5YR7/6 (reddish yellow) GRADING DOWN to 10YR7/6 (yellow) mottled with 10YR8/1 (white), firm, and moist. Sand is very fine quartz grains	
22.6	23.6	Gravelly Sand with Silt, 10YR6/6 (brownish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.4- to 0.8-inch diameter	
23.6	25.1	Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
25.1	25.9	Silt with Sand, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, slightly plastic, and moist. Sand is fine quartz grains	
25.9	28.1	Sand with Gravel, 7.5YR6/8 (reddish yellow) with some 7.5YR8/1 (white) mottling, firm to dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 4 mm- to 0.8-inch diameter	
28.1	29.1	Sand, 10YR7/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
29.1	30.0	Sand with Gravel as 25.9 to 28.1 ft	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
30.0	32.1	Sand with Gravel, 10YR6/4 (light yellowish brown), firm to dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded chert with(?) iron patina, 0.3- to 0.9-inch diameter	HU3
32.1	35.6	Silt, 7.5YR7/4 (pink), soft, moderately plastic, and moist	
35.6	37.5	Silt with Sand, 10YR8/3 (very pale brown), soft, nonplastic, and moist. Sand is very fine quartz grains	
37.5	44.9	Silt GRADING DOWN to Silt with a little Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, moderately plastic to plastic, and moist	
44.9	48.1	Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), very soft, moderately plastic, and moist	
48.1	48.6	Silty Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is very fine quartz grains	
48.6	50.1	Silt as 44.9 to 48.1 ft	
50.1	50.8	Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains	
50.8	51.2	Clay, 7.5YR6/4 (light brown) mottled with 7.5YR8/1 (white), moderately hard, plastic, and moist	
51.2	54.6	Silt with Clay, 7.5YR8/1 (white) with 7.5YR7/6 (reddish yellow) mottling, moderately soft, moderately plastic, and moist	
54.6	55.6	Clay as 50.8 to 51.2 ft	
55.6	57.4	Silt with some Sand, 10YR8/3 (very pale brown), soft, slightly plastic, and moist. Sand is fine quartz grains	
57.4	62.7	Sand, 10YR8/3 (very pale brown), firm, and wet. Sand is fine quartz grains	HU4
62.7	65.0	Sand with Gravel, 10YR8/3 (very pale brown), firm, and wet. Sand is 80% fine quartz grains and 20% coarse, rounded, chert grains. Gravel is rounded to subrounded chert without iron patina, 4 mm- to 0.5-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.5	Gravelly Sand with some Silt, 2.5YR6/6 (light red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 0.3- to 1.0-inch diameter (common fill material at PGDP)	Fill
2.5	13.5	Silt, 10YR7/1 (light gray) with some 10YR6/6 (brownish yellow) mottling, soft, nonplastic to slightly plastic, and moist	HU1
13.5	16.5	Silt with little Clay and with little Gravel, 10YR7/2 (light gray), hard, slightly plastic, and slightly moist. Gravel is subrounded chert without iron patina, 0.3-inch diameter	
16.5	17.5	Sandy Gravel with Silt, 7.5YR7/2 (light gray), dens, and moist. Gravel is subrounded chert without iron patina, 0.3- to 0.4-inch diameter. Sand is fine grained	HU2
17.5	20.0	No recovery	No Recovery
20.0	21.3	Sand with some Gravel, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with (?) iron patina, 4-mm to 1.0-inch diameter	HU2
21.3	21.7	Silt, 7.5YR8/4 (pink), moderately hard, moderately plastic, and moist	
21.7	21.8	Sand, 7.5YR8/4 (pink), firm, and moist. Sand is very fine quartz grains.	
21.8	23.7	Silt with little Clay, 7.5YR7/6 (reddish yellow) with 7.5YR7/1 (light gray) mottling, soft, moderately plastic, and moist	
23.7	25.0	Silt, 7.5YR8/3 (pink) with 7.5YR8/1 (white) mottling, soft, plastic, and moist	
25.0	25.9	Silty Sand, 10YR7/4 (very pale brown) with little 10YR8/1 (white) mottling, firm, and moist. Sand is very fine quartz grains	
25.9	26.7	Sand with some Gravel, 10YR7/4 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without (?) iron patina, 4-mm to 0.3-inch diameter	
26.7	27.6	Silty Sand, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), soft, nonplastic, and moist. Sand is very fine quartz grains	
27.6	27.9	Gravelly Medium Sand, 7.5YR6/6 (reddish yellow), loose, and moist. Gravel is subrounded chert without iron patina, 0.3-inch diameter	
27.9	28.5	Silt, 10YR7/3 (very pale brown), moderately hard, moderately plastic, and moist	
28.5	29.7	Silty Sand, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
29.7	32.1	Gravel with Silt, 10YR8/2 (very pale brown), dense, and moist. Gravel is subrounded to subangular chert without iron patina, 0.3- to 1.0-inch diameter	HU3
32.1	33.1	Sand with blebs of Silt, 10YR7/3 (very pale brown), firm, and moist. Sand is very fine quartz grains	
33.1	33.8	Sand with Gravel, 10YR8/2 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is rounded to subrounded chert without iron patina, 4-mm to 0.4-inch diameter	
33.8	34.5	Sand, 10YR8/2 (very pale brown), lightly consolidate, and moist. Sand is fine quartz grains	
34.5	34.9	Gravelly Sand as 27.6 to 27.9 ft but colored 7.5YR7/4 (pink)	
34.9	35.4	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains	
35.4	36.0	Sand with Gravel as 33.1 to 33.8 ft	
36.0	36.8	Sandy Silt with some Gravel, 10YR7/3 (very pale brown) with little 2.5YR7/8 (light red) staining, soft, nonplastic, and moist. Sand is fine grained. Gravel is rounded to subrounded chert without iron patina, 0.5- to 1.0-inch diameter	
36.8	37.4	Sand with Gravel as 33.1 to 33.8 ft	
37.4	42.4	Silt, 10YR8/2 (very pale brown) with some 2.5YR7/8 (light red) staining, soft, nonplastic to slightly plastic, and moist	
42.4	43.8	Silt with little Clay, 7.5YR7/3 (pink) mottled with 7.5YR7/1 (light gray), soft, moderately plastic, and moist	
43.8	47.6	Silt, 10YR8/2 (very pale brown) with laminations of 10YR7/6 (yellow) and 7.5YR7/6 (reddish yellow), moderately soft, moderately plastic, and moist	
47.6	48.2	Sand, 10YR8/2 (very pale brown) GRADING DOWN to 5YR7/6 (reddish yellow), firm, and moist. Sand is very fine quartz grains	
48.2	50.0	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR7/1 (light gray), soft, moderately plastic, and moist	
50.0	52.4	Sand, 10YR8/2 (very pale brown) with 7.5YR7/6 (reddish yellow) staining, firm, and moist. Sand is very fine quartz grains	
52.4	59.5	Slightly Clayey Silt, 7.5YR8/4 (pink) with 7.5YR8/1 (white) mottling, soft, moderately plastic, and moist	
59.5	62.9	Sand, 5YR7/6 (reddish yellow), lightly consolidated, and very moist. Sand is very fine quartz grains	

211-B-013

Plant North -2642.137, Plant East -5057.047

10/4/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
62.9	65.0	Sandy Gravel, 7.5YR7/6 (reddish yellow), loose, and wet. Gravel is subrounded to subangular chert with iron patina, 0.3- to 1.0-inch diameter. Sand consists of 80% fine grains and 20% of coarse to very coarse, rounded, chert grains		HU4

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	3.7	Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.4- to 1.0-inch diameter	Fill
3.7	13.7	Silt, 10YR7/1 (light gray) with little 10YR7/6 (yellow) mottling, GRADING DOWN to 10YR7/6 (yellow) with 10YR7/1 (light gray) mottling and streaks of 10YR3/1 (very dark gray) (manganese?), soft, nonplastic, and moist	HU1
13.7	17.0	Silt with Clay and little Gravel, 10YR7/1 (light gray), moderately soft to moderately hard, slightly plastic, and moist. Gravel is subrounded to rounded chert without iron patina, 0.4- to 0.5-inch diameter	
17.0	17.4	Sand with Gravel, 7.5YR7/3 (pink), dense, and moist. Sand is 80% fine quartz grains and 20% coarse, subrounded, chert grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.4-inch diameter	
17.4	17.7	Sand, 10YR7/3 (very pale brown), firm, and moist. Sand is fine quartz grains	HU2
17.7	18.0	Sand with Gravel as 17.0 to 17.4 ft	
18.0	18.3	Silt with Clay and little Gravel as 13.7 to 17.0 ft	
18.3	21.5	Sand with Gravel and little Silt, 10YR6/4 (light yellowish brown), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with and without iron patina, 0.3- to 0.8-inch diameter	
21.5	22.4	Sand, 10YR7/6 (yellow) GRADING DOWN to 10YR8/1 (white), dense GRADING DOWN to firm, and moist. Sand is fine quartz grains	
22.4	23.9	Sand with Gravel and little Silt as 18.3 to 21.5 ft	
23.9	24.5	Sand, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains	
24.5	29.5	Silty Sand, 10YR8/1 (white) mottled with 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains	
29.5	31.8	Sand with Gravel, 10YR6/6 (brownish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with(?) iron patina, 0.3- to 0.6-inch diameter	
31.8	32.6	Sand with Gravel and little Silt, , 10YR6/6 (brownish yellow), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with(?) iron patina, 0.3- to 0.6-inch diameter	
32.6	33.8	Silt with little Clay, 7.5YR7/4 (pink), very soft, moderately plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
33.8	35.7	Silt with little Clay, 7.5YR7/4 (pink) with some 7.5YR8/1 (white) mottling, soft, plastic, and moist	HU3
35.7	39.0	Silt with Sand, 7.5YR7/6 (reddish yellow) with some 7.5YR8/1 (white) mottling, moderately soft, nonplastic, and moist. Sand is very fine quartz grains	
39.0	41.0	Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), moderately hard to moderately soft, moderately plastic, and moist	
41.0	42.5	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), moderately hard to moderately soft, moderately plastic, and moist	
42.5	45.0	Silt, 7.5YR6/6 (reddish yellow) with some 7.5YR8/1 (white) mottling, hard, nonplastic, and moist	
45.0	50.0	Silt with Sand, 10YR7/4 (very pale brown) with some 10YR8/1 (white) mottling, moderately hard, nonplastic, and moist. Sand is very fine quartz grains	
50.0	52.0	Silt, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), moderately soft, slightly plastic, and moist	
52.0	52.5	Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) mottling, firm, and moist. Sand is very fine quartz grains	
52.5	57.7	Silt, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), moderately hard GRADING DOWN to hard, nonplastic, and moist	
57.7	59.8	Silt with Sand, 7.5YR7/3 (pink) mottled with 7.5YR8/1 (white), soft, moderately plastic, and moist. Sand is very fine quartz grains	
59.8	62.1	Interbedded Very Fine Sand [10YR8/1 (white), firm, and moist] AND Silt with Very Fine Sand [7.5YR7/4 (pink), soft, moderately plastic, and moist]	
62.1	62.5	Sand, 10YR8/1 (white), firm, and moist. Sand is fine quartz grains	HU4

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.5	Gravelly Sand, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is chert with iron patina, 0.3- to 1.0-inch diameter	Fill
2.5	12.9	Silt, 10YR7/2 (light gray) with little 10YR7/4 (very pale brown) mottling GRADING DOWN to 10YR6/3 (pale brown), soft, nonplastic, and moist	HU1
12.9	13.6	Sand, 10YR8/3 (very pale brown), dense, and moist. Sand is very fine quartz grains	
13.6	15.2	Silt with Clay and some Gravel, 10YR7/4 (very pale brown) GRADING DOWN to 10YR7/2 (light gray), moderately hard/stiff, slightly plastic, and moist	
15.2	16.0	Gravelly Sand, 10YR6/4 (light yellowish brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 4 mm- to 0.4-inch diameter	
16.0	18.8	Silt with little Clay and little Gravel, 10YR7/1 (light gray), moderately soft, slightly plastic, and moist. Gravel is subrounded chert without iron patina, 0.3- to 0.7-inch diameter	
18.8	20.2	Gravelly Sand with Silt, 10YR7/3 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.7- to 1.2-inch diameter AND subangular to subrounded chert with iron patina, 0.3- to 0.7-inch diameter	HU2
20.2	21.5	Sand with Gravel, 7.5YR7/4 (pink), dense, and moist. Sand is 70% fine quartz grains and 30% coarse-to-very-coarse, subrounded chert grains. Gravel is subangular to subrounded chert with(?) iron patina, 0.3-inch diameter	
21.5	22.6	Sand, 10YR8/2 (very pale brown) with 10YR7/6 (yellow) mottling, firm, and moist. Sand is fine quartz grains	
22.6	23.4	Sand with Gravel, 10YR7/4 (very pale brown), dense and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with and without iron patina, 0.3-inch diameter	
23.4	23.8	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is fine quartz grains	
23.8	24.1	Sandy Gravel, 10YR8/2 (very pale brown), dense, and moist. Gravel is subrounded chert with and without iron patina, 0.4-inch diameter. Sand is fine quartz grains	
24.1	29.0	Silt with Sand (very fine quartz grains), GRADING DOWN to Sand (very fine quartz grains), 10YR8/2 (very pale brown) with 10YR7/6 (yellow) and 7.5YR7/6 (reddish yellow) laminations, soft to moderately firm, nonplastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
29.0	31.4	Sandy Gravel GRADING DOWN to Sandy Gravel with little Silt, 7.5YR6/4 (light brown), dense, and moist. Gravel is subrounded to subangular chert with iron patina, 0.3- to 1.0-inch diameter. Sand is 80% fine quartz grains and 20% coarse-to-very-coarse, subrounded chert grains	HU3
31.4	36.3	Silt, 7.5YR7/4 (pink) with some 7.5YR8/1 (white) mottling GRADING DOWN to 10YR7/4 (very pale brown) with some 10YR8/1 (white) mottling, very soft to soft, nonplastic to moderately plastic, and moist	
36.3	39.3	Silt, 10YR7/4 (very pale brown) with 10YR8/1 (white) mottling GRADING DOWN to 10YR8/2 (very pale brown) with 7.5YR7/4 (pink) mottling, moderately soft, nonplastic, and moist	
39.3	40.6	Silty Sand, 10YR7/3 (very pale brown) GRADING DOWN to 10YR7/6 (yellow) with 10YR8/1 (white) mottling, firm, and moist. Sand is very fine quartz grains	
40.6	41.0	Sand, 7.5YR7/6 (reddish yellow), firm and moist. Sand is fine quartz grains	
41.0	45.6	Clayey Silt, 7.5YR7/4 (pink) with 7.5YR8/1 (white) mottling, moderately hard, plastic, and moist	
45.6	47.4	Silt with Sand, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains. Contains trace rounded chert gravel (without iron patina), 0.6- to 1.2-inch diameter	
47.4	48.0	Sand, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is fine quartz grains	
48.0	51.5	Silt with little Clay, 7.5YR8/1 (white) with 7.5YR7/4 (pink) mottling, moderately soft, moderately plastic, and moist	
51.5	53.4	Silt with Sand, 7.5YR8/1 (white) mottled with 7.5YR7/4 (pink), soft, slightly plastic, and moist. Sand is very fine quartz grains	
53.4	58.5	Silt with little Clay, 7.5YR7/6 (reddish yellow) with 7.5YR8/1 (white) mottling, moderately hard, slightly plastic, and moist	
58.5	62.3	Silt with Sand (very fine quartz grains) interbedded with Silty Sand (very fine quartz grains), 7.5YR8/1 (white) with 7.5YR7/7 (reddish yellow) laminations and mottling, soft/firm, nonplastic to slightly plastic, and moist	
62.3	63.9	Sand, 10YR8/1 (white), firm, moist to loose, and wet. Sand is fine quartz grains	

211-B-016

Plant North -2624.624, Plant East -5148.039

10/17/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
63.9	64.2	Sandy Gravel, 10YR8/2 (very pale brown), loose, and wet. Gravel is subrounded to subangular chert with and without iron patina, 4 mm- to 0.5-inch diameter. Sand is fine quartz grains		HU4
64.2	65.0	Sand with some Gravel and blebs of Silt, 10YR8/1 (white) with an interbed of 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.3- to 0.5-inch diameter		

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.8	Gravelly Sand, 5YR6/6 (reddish yellow), dense, and moist. Sand is fine grained quartz. Gravel is subangular to subrounded chert with iron patina, 0.3- to 0.7-inch diameter	Fill
1.8	2.2	Sandy Gravel, 10YR7/1 (light gray), dense, and moist. Gravel is subrounded limestone, 4mm- to 0.5-inch diameter (dense gravel aggregate/DGA). Sand is coarse, subangular limestone	
2.2	4.1	Gravelly Sand as 0.0 to 1.8 ft	
4.1	10.3	Silt, 10YR7/2 (light gray) with little 10YR7/4 (very pale brown) mottling, soft, nonplastic, and moist	HU1
10.3	11.5	Sand, 10YR6/6 (brownish yellow), dense, and moist. Sand is very fine quartz grains	
11.5	12.7	Gravelly Sand, 7.5YR6/4 (light brown), dense, and moist. Sand is 90% fine quartz grains and 10% coarse, subrounded, chert grains. Gravel is subrounded chert without (?) iron patina, 0.3- to 1.0-inch diameter	
12.7	15.2	Silt with little Clay and little Gravel, 10YR7/3 (very pale brown), moderately hard, nonplastic, and moist. Gravel is subrounded chert without iron patina	
15.2	17.6	Silt with Gravel and little Clay, 10YR7/3 (very pale brown) GRADING DOWN to 10YR7/1 (light gray), moderately hard, nonplastic, and moist. Gravel is subrounded chert without iron patina, 0.3- to 1.0-inch diameter	
17.6	18.1	Sand, 10YR7/4 (very pale brown), firm and moist. Sand is fine to medium, subrounded, quartz grains	HU2
18.1	18.6	Sand, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains	
18.6	19.1	Sand with some Gravel, 10YR7/4 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert without (?) iron patina, 0.3- to 0.4-inch diameter	
19.1	21.8	Sand with some Gravel, 10YR8/2 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert without (?) iron patina, 4 mm- to 0.4-inch diameter	
21.8	22.5	Sand with some Gravel, 7.5YR6/4 (light brown), dense, and moist. Sand is 70% fine quartz grains and 30% coarse-to-very-coarse, subrounded chert grains. Gravel is subrounded to rounded chert without (?) iron patina, 0.3- to 0.4-inch diameter	
22.5	24.9	Sand with little Gravel, 10YR7/1 (light gray) mottled with 10YR7/3 (very pale brown), firm, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert, with and without iron patina, 4 mm- to 0.6-inch diameter	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
24.9	25.8	Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
25.8	27.0	Silt, 10YR8/2 (very pale brown) with 7.5YR7/6 (reddish yellow) laminations, moderately soft, nonplastic, and moist	
27.0	28.1	Sand, 10YR8/2 (very pale brown), lightly consolidated, and moist. Sand is 90% fine quartz grains and 10% coarse, rounded, chert grains	
28.1	28.8	Silt as 25.8 to 27.0 ft	
28.8	29.5	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains	
29.5	31.0	Gravelly Sand, 10YR7/3 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.6-inch diameter	
31.0	31.5	Silt, 10YR8/2 (very pale brown), soft, plastic, and moist	
31.5	36.4	Gravelly Sand as 29.5 to 31.0 ft	
36.4	39.0	Silty Sand, 10YR8/2 (very pale brown) with some 7.5YR7/6 (reddish yellow) laminations, firm, and moist. Sand is very fine quartz grains	HU3
39.0	40.2	Silt with little Clay, 10YR7/2 (light gray) mottled with 10YR7/4 (very pale brown), moderately soft, moderately plastic, and moist	
40.2	47.0	Silt with some Clay, 7.5YR7/4 (pink) with some 7.5YR8/1 (white) mottling, moderately hard, slightly plastic, and moist	
47.0	53.9	Silt, 7.5YR8/1 (white) mottled with 7.5YR7/6 (reddish yellow), moderately hard, slightly plastic, and moist	
53.9	56.7	Silt, 7.5YR6/8 (reddish yellow), hard, nonplastic, and moist	
56.7	58.2	Silt, 7.5YR8/1 (white), moderately hard, nonplastic, and moist	
58.2	59.0	Silt with Sand, 10YR8/3 (very pale brown) with 7.5YR7/6 (reddish yellow) mottling, soft, nonplastic, and moist. Sand is fine quartz grains	
59.0	62.5	Sand with a few blebs of Silt, 10YR8/2 (very pale brown) with some 7.5YR7/6 (reddish yellow) staining and mottling, firm and moist. Sand is fine quartz grains. Silt blebs are 10YR8/2 (very pale brown), soft, plastic, and moist.	HU4

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.4	Gravelly Sand with little Silt, 2.5YR6/6 (light red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 4-mm to 0.4-inch diameter	FILL
1.4	2.0	Gravel, 10YR7/1 (light gray), dense, and moist. Gravel is subangular limestone, 4-mm to 0.3-inch diameter: dense gravel aggregate/DGA	
2.0	2.6	Gravelly Sand, 2.5YR6/6 (light red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded chert with iron patina, 4-mm to 0.4-inch diameter	
2.6	12.1	Silt, 10YR7/1 (light gray) with little 10YR7/4 (very pale brown) mottling GRADING DOWN to 7.5YR7/6 (reddish yellow), soft, nonplastic, and moist	HU1
12.1	12.7	Sand, 10YR8/2 (very pale brown), dense, and moist. Sand is very fine quartz grains	
12.7	14.0	Sand, 10YR7/6 (yellow), firm, and moist WITH thin Silt interbeds, 10YR8/2 (very pale brown), soft, plastic, and moist. Sand is fine quartz grains	
14.0	14.4	Sandy Silt with some Gravel, 7.5YR6/6 (reddish yellow), soft, nonplastic, and moist	
14.4	17.5	Silt with little Clay and Gravel, 10YR7/3 (very pale brown), moderately soft, plastic, and moist. Gravel is subrounded chert without iron patina, 0.4-inch diameter	
17.5	18.6	Silt with Sand and Gravel, 10YR7/1 (light gray), soft, nonplastic, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with and without iron patina, 0.3- to 0.6-inch diameter	
18.6	23.9	Sand with Gravel and little Silt, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is 70% fine quartz grains and 30% coarse, subrounded, chert grains. Gravel is subrounded to subangular chert with iron patina, 0.3- to 0.8-inch diameter	
23.9	25.8	Sand, 10YR8/4 (very pale brown), firm-to-lightly-consolidated, and moist. Sand is fine quartz grains	HU2
25.8	26.8	Silt with little Sand, 10YR7/6 (yellow) mottled with 10YR8/1 (white), soft, moderately plastic, and moist. Sand is fine quartz grains	
26.8	27.4	Gravelly Sand, 10YR8/2 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subangular to subrounded chert with(?) iron patina, 0.5- to 0.6-inch diameter	
27.4	27.6	Sand, 10YR8/1 (white), firm, and moist. Sand is fine quartz grains	
27.6	30.3	Gravelly Sand as 26.8 to 27.4 ft	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
30.3	31.5	Sand, 10YR8/1 (white), firm, and moist. Sand is fine quartz grains	HU3
31.5	32.4	Sand with Gravel, 10YR8/1 (white), firm, and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert without iron patina, 0.3- to 0.5-inch diameter	
32.4	39.0	Silt with some Sand, 10YR8/1 (white), soft, nonplastic to moderately plastic, and moist. Sand is very fine quartz grains	
39.0	43.2	Silt with some Clay, 10YR8/1 (white) mottled with 10YR7/6 (yellow), soft, plastic, and moist	
43.2	51.6	Silt with some Clay, 7.5YR7/4 (pink) mottled with 7.5YR8/1 (white), moderately soft, moderately plastic, and moist	
51.6	52.5	Silt with Sand (soft, moderately plastic, and moist) GRADING DOWN to Sand (firm and moist), 7.5YR6/6 (reddish yellow) mottled with 7.5YR8/1 (white). Sand is very fine quartz grains	
52.5	55.5	Silt with little Clay, 7.5YR6/6 (reddish yellow) with little 7.5YR8/1 (white) mottling, moderately hard/stiff, nonplastic to slightly plastic, and moist	
55.5	58.7	Silty Sand, 10YR8/2 (very pale brown) with 10YR7/76 (yellow) laminations, firm, and moist. Sand is very fine quartz grains	
58.7	62.5	Sand, 10YR8/4 (very pale brown), firm and moist to loose and wet. Sand is fine quartz grains but for interval of coarse, rounded, quartz grains at 62.0 to 62.1 ft	HU4

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	2.2	Gravelly Sand with little Silt, 2.5YR5/6 (red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 4 mm- to 0.5-inch diameter	HU1
2.2	15.2	Silt, 10YR7/1 (light gray) with little 10YR7/4 (very pale brown) GRADING DOWN to 10YR7/3 (very pale brown), soft, nonplastic, and moist	
15.2	18.3	Silt with little Clay and little Gravel, 10YR7/1 (light gray) mottled with 10YR7/4 (very pale brown), moderately hard, slightly plastic, and moist. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.9-inch diameter	
18.3	19.1	Sand with Gravel, 10YR7/4 (very pale brown), dense, and moist. Sand is 70% fine quartz grains and 30% coarse, subrounded, chert grains. Gravel is subrounded chert without iron patina, 0.3- to 0.5-inch diameter	HU2
19.1	20.0	Sand with trace of Gravel, 7.5YR7/6 (reddish yellow), dense, and moist. Sand is 85% fine quartz grains and 15% coarse, subrounded, chert grains. Gravel is chert, 0.3- to 0.5-inch diameter	
20.0	20.9	Sand with Gravel as 18.3 to 19.1 ft	
20.9	21.3	Silt with Sand, 10YR7/1 (light gray), moderately hard, nonplastic, and moist. Sand is very fine quartz grains	
21.3	22.5	Sand with Gravel as 18.3 to 19.1 ft	
22.5	27.5	Silty Sand, firm, and moist; interbedded with Silt with little Clay, moderately hard, slightly plastic, and moist; 10YR7/1 (light gray) mottled with 7.5YR7/6 (reddish yellow). Sand is very fine quartz grains	
27.5	28.2	Silty Sand with Gravel, 10YR7/1 (light gray) mottled with 7.5YR7/6 (reddish yellow), firm, and moist. Sand is very fine quartz grains. Gravel is subrounded chert without iron patina, 0.3- to 0.8-inch diameter	
28.2	28.5	Silt with Sand, 10YR7/1 (light gray), moderately soft, moderately plastic, and moist. Sand is very fine quartz grains	
28.5	32.0	Sand with Gravel and with little Silt, 7.5YR7/4 (pink), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.4-inch diameter (and trace 1.0-inch diameter)	
32.0	42.3	Silt, 10YR7/3 (very pale brown) GRADING DOWN to 10YR8/2 (very pale brown) with 10YR7/6 (yellow) laminations, soft to moderately soft, nonplastic to slightly plastic, and moist	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
42.3	45.5	Silt with little Clay, 7.5YR7/4 (pink) mottled with 7.5YR7/1 (white), moderately hard, slightly to moderately plastic, and moist	HU3
45.5	46.5	Silty Sand, 7.5YR6/6 (reddish yellow) with some 7.5YR8/1 (white) mottling, firm, and moist. Sand is very fine quartz grains	
46.5	48.5	Sand with trace of Gravel, 7.5YR6/6 (reddish yellow) mottled with 7.5YR8/1 (white), firm, and moist. Sand is fine quartz grains. Gravel is subrounded chert without iron patina, 0.3- to 0.7-inch diameter	
48.5	50.3	Silt, 10YR7/4 (very pale brown) mottled with 10YR8/1 (white), moderately hard, nonplastic, and moist	
50.3	52.2	Silt, 10YR7/3 (very pale brown) mottled with 7.5YR7/6 (reddish yellow), soft, moderately plastic, and moist	
52.2	53.6	Silty Sand, 10YR8/2 (very pale brown) mottled with 10YR7/6 (yellow), firm, and moist. Sand is very fine quartz grains	
53.6	57.7	Silt, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), moderately soft, moderately plastic, and moist	
57.7	59.0	Silty Sand, 10YR8/4 (very pale brown) mottled with 10YR8/1 (white), firm, and moist. Sand is very fine quartz grains	
59.0	59.6	Silt with Sand, 10YR7/6 (yellow), soft, nonplastic, and moist. Sand is very fine quartz grains	
59.6	67.5	Sand, 10YR8/4 (very pale brown), lightly consolidated and moist TO loose and wet WITH a few blebs of Clay, 10YR8/2 (very pale brown), soft, plastic, and moist. Sand is fine quartz grains	HU4

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
0.0	1.3	Fill: Sand with Gravel and little Silt, 2.5YR6/6 (light red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert with iron patina, 0.3-inch diameter	Fill
1.3	1.5	Fill: Gravel, 10YR7/2 (light gray), loose, and moist. Gravel is subangular to subrounded limestone, 4 mm- to 0.5-inch diameter (dense gravel aggregate/DGA)	
1.5	2.6	Fill: Sand with Gravel, 2.5YR6/6 (light red), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to rounded chert with iron patina, 0.3-inch diameter	
2.6	14.5	Silt, 10YR7/1 (light gray) mottled with 10YR7/6 (yellow) GRADING DOWN at 13.1 ft to 10YR7/6 (yellow) mottled with 10YR5/4 (yellowish brown) and 10YR7/1 (light gray), soft, nonplastic, and moist	HU2
14.5	16.7	Silt with little Clay and little Gravel, 10YR7/1 (light gray), moderately soft, moderately plastic, and moist. Gravel is subrounded to subangular chert without iron patina, 4 mm- to 0.3-inch diameter	
16.7	18.3	Silt with Gravel and little Clay, 10YR7/1 (light gray) mottled with 7.5YR7/4 (pink), moderately soft, moderately plastic, and moist. Gravel is subrounded chert without iron patina, 0.5- to 1.1 inch diameter	
18.3	20.0	Clayey Silt with little Gravel, 10YR7/1 (light gray), moderately hard, plastic, and moist. Gravel is subangular to subrounded chert without iron patina, 0.3- to 0.5-inch diameter	
20.0	20.2	Gravelly Sand, 7.5YR6/4 (light brown), dense, and moist. Sand is 65% fine quartz grains and 35% coarse, subrounded, chert grains. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.5-inch diameter	
20.2	22.0	Silt with Sand, 10YR8/2 (very pale brown) with some 10YR7/6 (yellow) mottling, soft, nonplastic, and moist. Sand is very fine quartz grains	
22.0	22.4	Silt with Gravel and little Clay as at 16.7 to 18.3 ft but colored 7.5YR6/2 (pinkish gray)	
22.4	23.0	Gravelly Sand as 20.0 to 20.2 ft	
23.0	24.2	Silt, 10YR8/1 (white) mottled with 10YR8/3 (very pale brown), soft, nonplastic, and moist	
24.2	25.3	Sand, 10YR8/1 (white) with 10YR7/4 (very pale brown) mottling, firm, and moist. Sand is fine quartz grains	

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology	Hydrogeologic Unit
25.3	30.0	Sand with some Gravel, 10YR8/2 (very pale brown) GRADING DOWN to 10YR6/6 (brownish yellow), dense, and moist. Sand is 85% fine quartz grains and 15% coarse to very coarse, subrounded, chert grains. Gravel is subrounded to subangular chert without iron patina, 0.3- to 0.4-inch diameter	HU3
30.0	30.5	Sand, 10YR8/3 (very pale brown), firm, and moist. Sand is fine quartz grains	
30.5	31.9	Gravelly Sand, 10YR7/4 (very pale brown), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with and without iron patina, 4 mm- to 0.8-inch diameter (poorly sorted)	
31.9	32.2	Sand, 7.5YR7/6 (reddish yellow), firm, and moist. Sand is fine quartz grains	
32.2	37.5	Silt with Sand, 7.5YR8/6 (reddish yellow), soft, nonplastic, and moist. Sand is fine quartz grains	HU3
37.5	42.2	Silt, 10YR7/4 (pink) with some 10YR8/1 (white) mottling, soft, nonplastic to moderately plastic, and moist	
42.2	44.2	Silt with little Clay, 7.5YR7/4 (pink) with some 7.5YR6/6 (reddish yellow) mottling, moderately soft GRADING DOWN to soft, moderately plastic, and moist	
44.2	45.9	Silt, 7.5YR7/6 (reddish yellow) with little 7.5YR8/1 (white) mottling, soft, plastic, and moist	
45.9	47.9	Silt with Sand, 7.5YR7/6 (reddish yellow) mottled with 7.5YR8/1 (white), soft, nonplastic, and moist. Sand is very fine quartz grains	
47.9	50.6	Sand, 10YR8/2 (very pale brown), firm, and moist. Sand is very fine quartz grains	
50.6	51.4	Silt with Sand, 10YR8/2 (very pale brown), soft, slightly plastic, and moist. Sand is very fine quartz grains	
51.4	52.3	Silt with Clay, 7.5YR8/2 (pinkish white) mottled with 7.5YR7/4 (pink), soft, plastic, and moist	
52.3	52.9	Silt with Sand, 10YR8/2 (very pale brown), soft, slightly plastic, and moist. Sand is very fine quartz grains	
52.9	53.6	Sand, 10YR8/4 (very pale brown), firm, and moist. Sand is fine quartz grains	
53.6	57.6	Silt, 7.5YR8/2 (pinkish white) with 7.5YR7/4 (pink) mottling, soft, plastic, and moist	
57.6	59.7	Sand (fine quartz grains), 10YR8/6 (yellow), firm, and moist interbedded with Silt, 10YR8/3 (very pale brown), soft, nonplastic, and moist	
59.7	62.4	Sand, 10YR7/6 (yellow), firm, and moist. Sand is fine quartz grains	

211-B-020

Plant North -2627.587, Plant East -5106.145

10/19/2012

Start Depth (ft bgs)	End Depth (ft bgs)	Lithology		Hydrogeologic Unit
62.4	62.7	Gravelly Sand, 10YR8/1 (white), dense, and moist. Sand is fine quartz grains. Gravel is subrounded to subangular chert with iron patina, 0.4- to 0.5-inch diameter		HU4
62.7	65.0	Sand, 10YR8/2 (very pale brown), firm and moist to loose and wet. Sand is fine quartz grains		

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX E
SUMMARY OF SOILS VOC DATA FOR SWMU 211-A

THIS PAGE INTENTIONALLY LEFT BLANK

SWMU 211-A VOC Analyses

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-001	8/29/2012	0.5	0.44 U	1.8 U	0.67 U	1.1 U	0.48 U
		7.5	0.42 U	1.7 U	0.65 U	1 U	0.46 U
		10.1	0.39 U	1.6 U	0.61 U	0.95 U	0.43 U
		(10.1)DUP	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		19.9	9.7	1.4 U	0.54 U	0.84 U	0.39 U
		24.9	4 J	1.5 U	0.55 U	0.86 U	0.39 U
		25.5	14	1.2 U	0.46 U	0.72 U	0.33 U
		34.5	3.1 J	1.4 U	0.52 U	0.81 U	0.37 U
		35.5	0.45 J	1.3 U	0.5 U	0.78 U	0.36 U
		44.5	0.36 U	1.5 U	0.56 U	0.88 U	0.4 U
		46.5	0.36 U	1.5 U	0.55 U	0.86 U	0.39 U
		50.1	0.37 U	1.5 U	0.57 U	0.89 U	0.41 U
		59	11	1.7 U	0.63 U	0.99 U	0.45 U
	Average		3.4	***	***	***	***
211-A-002	8/30/2012	4.5	2.1 J	1.8 U	0.69 J	1 U	0.47 U
		6	23	1.6 U	9.4 J	0.93 U	0.43 U
		11	12	1.6 U	3.2 J	0.92 U	0.42 U
		16	0.34 U	1.4 U	0.52 U	0.82 U	0.37 U
		21	9.5	1.5 U	2 J	0.88 U	0.4 U
		25.5	0.47 J	1.5 U	0.55 U	0.85 U	0.39 U
		32.5	10	1.6 U	0.92 J	0.93 U	0.42 U
		(32.5)DUP	2.4 J	1.4 U	0.53 U	0.83 U	0.38 U
		36.5	1,100	27 U	11 U	8.9 U	30 U
		40.5	880	22 U	9.6 U	7.5 U	26 U
		45.5	140	1.5 U	0.58 U	0.9 U	0.41 U
		50.1	2.5 J	1.6 U	0.6 U	0.93 U	0.43 U
		59.9	65	2 J	0.61 U	0.96 U	0.44 U
	8/31/2012	62.5	8.7 J	1.6 U	0.58 U	0.91 U	0.42 U
	Average		161	2.5	2.0	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-003	9/12/2012	4	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		9	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		14	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		19	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		(21.5)DUP	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		21.5	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		28.5	0.31 U	1.3 U	0.48 U	0.75 U	0.34 U
		34.9	8.7 J	1.6 U	0.6 U	0.95 U	0.43 U
		39.5	110	17	1.8 J	0.83 U	0.38 U
		40.1	80	19	0.85 J	0.94 U	0.43 U
		48	52	12	1.2 J	0.89 U	0.41 U
		54	4.4 J	1.5 U	0.56 U	0.87 U	0.4 U
		59	0.39 U	1.6 U	0.59 U	0.93 U	0.43 U
		64	0.36 U	1.9 J	0.56 U	0.87 U	0.4 U
	Average		18	4.1	0.5	***	***
211-A-004	8/31/2012	4	0.39 U	1.6 U	0.59 U	0.93 U	0.42 U
		9	0.38 U	1.6 U	0.59 U	0.92 U	0.42 U
		14	0.36 U	1.6 J	0.56 U	0.87 U	0.4 U
		16.5	0.33 U	18	0.5 U	0.79 U	0.36 U
		24.9	1,700	1,600	9.6 U	7.5 U	26 U
		27	960	970	9.4 J	7.3 U	25 U
		30.1	620	900	20 J	6.2 U	21 U
		35.1	1,200	1,400	20 J	8.1 U	28 U
		40.1	2,400	4,400	29 J	8.3 U	28 U
	9/4/2012	48.5	17 U	480	9.9 U	7.7 U	26 U
		53.5	33 J	110 J	10 U	8.2 U	28 U
		59.9	97	12	10 J	1.1 U	0.51 U
		61	160	23	14	1.1 U	0.49 U
	Average		552	763	9.1	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-005	9/4/2012	4	19 U	26 U	11 U	8.8 U	30 U
		6	1,700	24 U	15 J	8.2 U	28 U
		14	88	1.5 U	11	0.88 U	7.6 J
		15.1	35	1.6 U	4.7 J	0.92 U	1.5 J
		(15.1)DUP	42	1.5 U	6.4 J	0.9 U	2 J
		23.5	17	9.3	2 J	0.81 U	0.37 U
		26	13	1.3 U	2.2 J	0.75 U	0.35 U
		34.9	54	130	1.4 J	0.88 U	0.4 U
		35.5	190 J	840	11 U	8.4 U	29 U
		43.5	96 J	690	10 U	7.9 U	27 U
		45.5	71 J	550	10 U	7.8 U	27 U
		53	11	8.8 J	0.6 J	0.86 U	0.4 U
		55.5	6.5 J	3.2 J	0.84 J	0.95 U	0.43 U
		60.5	120	24	7.1 J	0.9 U	0.41 U
		Average	175	163	5.2	***	5.9
211-A-006	9/26/2012	4	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		(4)DUP	1.8 J	1.7 U	0.65 J	0.98 U	0.45 U
		9	0.43 U	1.8 U	0.66 U	1 U	0.47 U
		14	0.38 U	1.6 U	0.59 U	0.93 U	0.42 U
		18.5	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		23.5	0.32 U	1.3 U	0.49 U	0.77 U	0.35 U
		29	0.36 U	1.5 U	0.56 U	0.88 U	0.4 U
		32	1.1 J	1.3 U	0.49 U	0.77 U	0.35 U
		39	13	32	0.83 J	0.97 U	0.44 U
		40.5	8 J	22	0.59 U	0.92 U	0.42 U
		49	8.7	17	0.51 U	0.8 U	0.37 U
		51	7.1 J	9.5 J	0.6 U	0.94 U	0.43 U
		59.5	24	7.2 J	1 J	1 U	0.48 U
		61	52	9.4 J	2.9 J	1.1 U	0.51 U
		Average	8.3	7.4	0.6	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-008	9/20/2012	4	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		(9)DUP	0.54 U	2.2 U	0.83 U	1.3 U	0.6 U
		9	0.49 U	2 U	0.75 U	1.2 U	0.54 U
		13.5	0.43 U	1.8 U	0.66 U	1 U	0.47 U
		19	0.38 U	1.6 U	0.59 U	0.92 U	0.42 U
		24.9	0.45 U	1.9 U	0.69 U	1.1 U	0.5 U
		29	0.4 U	1.6 U	0.61 U	0.96 U	0.44 U
		33.5	0.37 U	1.5 U	0.56 U	0.88 U	0.4 U
		39	0.36 U	1.5 U	0.56 U	0.87 U	0.4 U
		41	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		49.9	0.37 U	1.5 U	0.56 U	0.88 U	0.4 U
		53.5	5.3 J	1.5 U	0.58 U	0.9 U	0.41 U
		59	34	6.5 J	0.67 U	1 U	0.48 U
		61.5	130	78	4.2 J	1.1 U	0.52 U
	Average		12	6.8	0.6	***	***
211-A-009	9/20/2012	4	0.43 U	1.8 U	0.66 U	1 U	0.48 U
		9	0.44 U	1.8 U	0.68 U	1.1 U	0.49 U
		14	0.43 U	1.8 U	0.66 U	1 U	0.47 U
		19	8.7 J	1.7 U	0.62 U	0.98 U	0.45 U
		22.5	1.7 J	1.7 U	0.64 U	1 U	0.46 U
		(29)DUP	13	1.5 U	0.55 U	0.87 U	0.4 U
		29	11	1.6 U	0.6 U	0.94 U	0.43 U
		34	2.4 J	2.5 J	0.57 U	0.89 U	0.41 U
		39.5	160 J	25 U	11 U	8.5 U	29 U
		40.1	110	1.5 U	0.54 U	0.85 U	0.39 U
		49	1.8 J	1.8 U	0.68 U	1.1 U	0.48 U
		54	32	3.6 J	0.56 U	0.88 U	0.4 U
		59.9	190	38	1.9 J	0.92 U	0.42 U
		60.1	33	3.3 J	0.64 J	0.93 U	0.43 U
	Average		40	4.8	0.8	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-010	8/16/2012	4	0.39 U	1.6 U	0.6 U	0.95 U	0.43 U
		9.5	0.46 J	1.6 U	0.6 U	0.94 U	0.43 U
		14.5	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		19.9	14	1.4 U	11	0.8 U	0.37 U
	9/13/2012	24	2.7 J	1.4 U	0.51 U	0.81 U	0.37 U
		26	25	1.5 U	0.91 J	0.89 U	0.41 U
		33	790	22 U	9.5 U	7.4 U	25 U
		38.5	500	26 U	11 U	8.6 U	29 U
		40.1	280	22 U	9.6 U	7.5 U	25 U
		48	1.4 J	1.5 U	0.57 U	0.9 U	0.41 U
		52	0.32 U	1.3 U	0.49 U	0.76 U	0.35 U
	9/17/2012	59	15	1.6 U	0.61 U	0.96 U	0.44 U
		60.5	120	2.2 J	1.3 J	1.1 U	0.52 U
	Average		135	3.4	2.3	***	***
211-A-011	8/17/2012	4	0.39 U	1.6 U	0.6 U	0.93 U	0.43 U
		9	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		(11)DUP	0.39 U	1.6 U	0.6 U	0.95 U	0.43 U
		11	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		19.5	0.39 U	1.6 U	0.59 U	0.93 U	0.43 U
		20.1	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		27.5	0.34 U	1.4 U	0.52 U	0.82 U	0.37 U
		30.5	0.35 U	1.5 U	0.54 U	0.85 U	0.39 U
		36.5	60	17	0.86 J	1.2 U	0.55 U
		40.1	76	20	0.64 U	1 U	0.46 U
		49.5	11	2.9 J	0.67 U	1 U	0.48 U
		51.5	3.2 J	1.5 U	0.55 U	0.86 U	0.39 U
		59.9	8.3 J	19	0.68 U	1.1 U	0.49 U
		62.5	8.6 J	28	0.6 U	0.94 U	0.43 U
	Average		12	6.7	0.3	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-012	9/17/2012	4	0.46 U	1.9 U	0.7 U	1.1 U	0.5 U
		9	0.4 U	1.6 U	0.61 U	0.96 U	0.44 U
		14	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		(19)DUP	0.39 U	1.6 U	0.59 U	0.93 U	0.43 U
		19	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		20.5	0.36 U	1.5 U	0.55 U	0.86 U	0.39 U
		26.5	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		31	0.44 U	1.8 U	0.67 U	1.1 U	0.48 U
		36.5	0.35 U	1.4 U	0.53 U	0.84 U	0.38 U
		40.1	20	23	0.88 J	0.97 U	0.45 U
		49	16	11	1.5 J	0.86 U	0.39 U
		54	5.1 J	1.6 J	0.55 U	0.86 U	0.39 U
		59	12	50	1.2 J	1 U	0.46 U
		64.5	14	55	1.3 J	0.94 U	0.43 U
	Average		4.9	11	0.6	***	***
211-A-013	9/4/2012	4.9	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		6.5	5.7 J	1.6 U	12	0.96 U	0.44 U
		14	42	1.6 U	22	0.93 U	3 J
		18.5	0.37 U	1.5 U	0.57 U	0.9 U	0.41 U
		20.5	9.3	1.4 U	2.1 J	0.84 U	0.38 U
		26.5	3.3 J	1.4 U	0.92 J	0.81 U	0.37 U
		30.1	22	7.8 J	2.9 J	0.81 U	0.39 J
		35.5	29	5.1 J	1.3 J	0.87 U	0.4 U
		44.5	170 J	350	9.4 U	7.4 U	25 U
	9/5/2012	47.5	78 J	180 J	9.7 U	7.6 U	26 U
		53.5	13	11	0.7 J	0.99 U	0.45 U
		55.1	13	12	0.76 J	0.91 U	0.42 U
		64	56	13	4.8 J	0.99 U	0.45 U
	Average		34	45	4.4	***	2.4

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-014	9/5/2012	4	0.39 U	1.6 U	0.6 U	0.93 U	0.43 U
		9	0.4 U	24	0.61 U	0.96 U	0.44 U
		14	0.41 U	6.1 J	0.63 U	0.98 U	0.45 U
		19	0.33 U	1.4 U	0.51 U	0.8 U	0.36 U
		24.5	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		29.5	0.31 U	1.7 J	0.48 U	0.75 U	0.35 U
		34.5	18	22	1.1 J	0.88 U	0.4 U
		(36.5)DUP	28	43	1.6 J	0.81 U	0.37 U
		36.5	0.35 U	1.5 U	0.54 U	0.85 U	0.39 U
		42	59	140	3.5 J	0.84 U	0.38 U
		45.1	24	57	0.93 J	0.78 U	0.36 U
		50.5	26	34	0.6 J	0.87 U	0.4 U
		56	2.4 J	1.4 U	0.53 U	0.83 U	0.38 U
		63.5	16	7.6 J	1.7 J	0.95 U	0.44 U
	Average		12	24	0.8	***	***
211-A-015	9/6/2012	4.5	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		6	0.41 U	1.7 U	0.64 U	1 U	0.46 U
		14	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		19	0.37 U	1.5 U	0.56 U	0.88 U	0.4 U
		24	0.31 U	1.3 U	0.48 U	0.75 U	0.34 U
		25.5	0.35 U	1.4 U	0.53 U	0.84 U	0.38 U
		34	20	30	1 J	0.83 U	0.38 U
		39	51	83	1.4 J	0.86 U	0.39 U
		44.9	47	22	0.54 U	0.85 U	0.39 U
		46.5	120	24	0.71 J	0.84 U	0.39 U
		50.1	130	5.9 J	0.56 U	0.88 U	0.4 U
		59.9	57	47	1.9 J	0.91 U	0.42 U
		63	36	25	3.3 J	1 U	0.46 U
	Average		36	19	0.8	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-016	9/27/2012	0.1	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		6	1.7 J	1.7 U	1.1 J	0.97 U	0.45 U
		14	0.48 U	2 U	0.74 U	1.2 U	0.53 U
		16.5	2.1 J	1.7 U	0.63 U	0.99 U	0.45 U
		23.5	0.38 U	1.6 U	0.59 U	0.92 U	0.42 U
		(29.9)DUP	34	3.7 J	0.52 U	0.82 U	0.37 U
		29.9	33	4.4 J	0.48 U	0.75 U	0.34 U
		30.5	86	18	0.56 U	0.88 U	0.4 U
		35.1	6.4 J	4.8 J	0.64 U	1 U	0.46 U
		43	26 J	26 U	11 U	8.7 U	29 U
		46.5	300	22 U	9.5 U	7.4 U	25 U
		54	150	8.6	0.54 J	0.81 U	0.37 U
		55.1	89 J	25 U	11 U	8.3 U	28 U
		62.5	90	110	4.1 J	1.3 U	0.58 U
	Average		58	14	1.7	***	***
211-A-017	9/21/2012	1	0.48 U	2 U	0.74 U	1.2 U	0.53 U
		9	2.4 J	1.9 U	6.4 J	1.1 U	0.5 U
		14	2.2 J	1.6 U	21	0.94 U	0.59 J
		18	79	1.4 U	9.5	0.83 U	0.38 U
		(22.5)DUP	31	1.8 U	7.7 J	1.1 U	0.49 U
		22.5	29	1.4 U	7.2 J	0.84 U	0.38 U
		29.5	1,500	26 U	11 U	8.8 U	30 U
		30.1	1,600	22 U	9.6 U	7.5 U	25 U
		39	190	1.8 U	3 J	1.1 U	0.48 U
		41.5	64	1.5 U	0.86 J	0.87 U	0.4 U
		49	9 J	1.5 U	0.57 U	0.89 U	0.41 U
		52.5	23	1.5 U	0.71 J	0.85 U	0.39 U
		59	180 J	29 U	12 U	9.7 U	33 U
		61.5	150 J	23 U	10 U	7.9 U	27 U
	Average		276	***	5.6	***	4.3

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-018	9/11/2012	0.5	0.4 U	1.7 U	0.62 U	0.97 U	0.44 U
		6.5	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		(11)DUP	0.4 U	1.7 U	0.62 U	0.97 U	0.45 U
		11	0.36 U	1.5 U	0.55 U	0.87 U	0.4 U
		19.9	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		21	0.36 U	1.5 U	0.56 U	0.88 U	0.4 U
		28.5	0.32 U	1.3 U	0.5 U	0.78 U	0.36 U
		33	0.35 U	1.5 U	0.54 U	0.85 U	0.39 U
		36	1.1 J	1.6 U	0.59 U	0.93 U	0.42 U
		44.9	7.7 J	4.6 J	0.52 U	0.81 U	0.37 U
		48	49	15	0.57 U	0.89 U	0.41 U
		53.5	81	23	0.61 U	0.96 U	0.44 U
		56.5	66	20	0.62 U	0.97 U	0.44 U
	9/12/2012	62	440	24 U	10 U	8.1 U	28 U
	Average		46	5.8	***	***	***
211-A-019	9/12/2012	0.5	0.36 U	1.5 U	0.55 U	0.86 U	0.39 U
		9	0.37 U	1.5 U	0.57 U	0.9 U	0.41 U
		14	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		19	0.32 U	1.3 U	0.49 U	0.77 U	0.35 U
		23	0.34 U	1.4 U	0.52 U	0.82 U	0.37 U
		29.5	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		33.5	0.36 U	1.5 U	0.55 U	0.86 U	0.39 U
		39	0.36 U	4.4 J	0.55 U	0.86 U	0.39 U
		44	0.35 U	2.4 J	0.54 U	0.85 U	0.39 U
		47	0.35 U	4.5 J	0.54 U	0.84 U	0.38 U
		54	2 J	26	0.56 U	0.88 U	0.4 U
		59	2.4 J	35	0.57 U	0.89 U	0.41 U
		64	11	59	3 J	0.93 U	0.42 U
	Average		1.3	10	0.5	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-020	9/24/2012	4.5	0.43 U	1.8 U	0.67 U	1 U	0.48 U
		9	9.9 J	1.7 U	1.8 J	1 U	0.46 U
		(9)DUP	6.7 J	1.6 U	1.3 J	0.95 U	0.43 U
		11	3.9 J	1.8 U	0.7 J	1 U	0.47 U
		19	23	1.5 U	5.4 J	0.88 U	0.4 U
		20.1	12	1.9 U	3.3 J	1.1 U	0.51 U
		25.9	710	24 U	10 U	8 U	27 U
		32	210	1.9 U	4.3 J	1.1 U	0.49 U
		35.5	470	25 U	11 U	8.3 U	28 U
		40.1	770	23 U	9.8 U	7.7 U	26 U
		48	800	23 U	9.8 U	7.6 U	26 U
		53.5	300	22 U	9.4 U	7.3 U	25 U
		57	800	25 U	11 U	8.5 U	29 U
		62	180	6.7 J	3.1 J	0.95 U	0.44 U
		65.1	160	17	4.3 J	1.1 U	0.5 U
	Average		297	6.7	3.7	***	***
211-A-021	9/6/2012	0.1	0.36 U	1.5 U	0.56 U	0.88 U	0.4 U
		6.5	0.4 U	1.7 U	0.74 J	0.97 U	0.44 U
		14	0.38 U	1.6 U	1.2 J	0.92 U	0.42 U
		18.5	0.34 U	1.4 U	0.54 J	0.81 U	0.37 U
		24	0.33 U	1.4 U	0.51 U	0.79 U	0.36 U
		29.5	15	22	1.6 J	0.91 U	0.42 U
		30.5	7.7 J	7.5 J	0.73 J	0.78 U	0.36 U
		39	46	84	3.6 J	0.89 U	0.41 U
		(44)DUP	59	110	3.8 J	0.87 U	0.47 J
		44	50	95	3.5 J	0.9 U	0.41 U
		49	46	82	3.1 J	0.81 U	0.37 U
		54	30	29	3.3 J	0.86 U	0.39 U
		55.1	7.5 J	6.2 J	1.2 J	0.93 U	0.43 U
		64	6.2 J	3.4 J	0.82 J	0.99 U	0.45 U
	Average		19	32	1.8	***	0.2

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-022	9/27/2012	0.5	0.43 U	1.8 U	0.66 U	1 U	0.47 U
		6	2.7 J	1.7 U	0.7 J	0.97 U	0.44 U
		14	3.2 J	1.6 U	0.69 J	0.94 U	0.43 U
		18.5	1.6 J	1.5 U	0.54 U	0.85 U	0.39 U
		24.9	0.37 U	1.5 U	0.56 U	0.88 U	0.4 U
		27.5	0.36 U	1.5 U	0.56 U	0.88 U	0.4 U
		33.5	0.36 U	1.5 U	0.55 U	0.87 U	0.4 U
		35.1	8.5 J	6.7 J	0.85 J	0.83 U	0.38 U
		44	10	12	1 J	0.86 U	0.39 U
		49.5	6.7 J	5 J	0.68 U	1.1 U	0.49 U
		54.5	13	17	0.79 J	1.1 U	0.52 U
		56	88	1.8 J	1 J	0.89 U	0.41 U
		62	27	5.3 J	1.2 J	1 U	0.46 U
	Average		12	4.1	0.6	***	***
211-A-023	9/11/2012	1	0.4 U	1.7 U	0.62 U	0.97 U	0.44 U
		7	0.37 U	1.5 U	0.57 U	0.89 U	0.41 U
		14.9	0.36 U	1.5 U	0.56 U	0.88 U	0.4 U
		18	0.36 U	1.5 U	0.55 U	0.87 U	0.4 U
		20.1	0.33 U	1.6 J	0.51 U	0.81 U	0.37 U
		(20.1)DUP	0.36 U	7.2 J	0.56 U	0.88 U	0.4 U
		25.5	0.33 U	3.9 J	0.5 U	0.78 U	0.36 U
		34.9	0.37 U	1.5 U	0.57 U	0.89 U	0.4 U
		36.5	0.43 U	1.8 U	0.66 U	1 U	0.47 U
		43	0.39 U	7.9 J	0.6 U	0.94 U	0.43 U
		49	1.4 J	9.9	0.55 U	0.86 U	0.39 U
		53	66	8.6 J	0.87 J	0.97 U	0.45 U
		55.1	130	6.9 J	1.5 J	0.94 U	0.43 U
		62	73	11	1 J	1 U	0.46 U
	Average		19	4.4	0.5	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-024	9/10/2012	1	0.37 U	1.5 U	0.56 U	0.88 U	0.4 U
		9	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		14	0.4 U	1.6 U	0.61 U	0.96 U	0.44 U
		19	2.2 J	1.6 U	0.61 U	0.95 U	0.43 U
		24	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		26	1.8 J	1.2 U	0.46 U	0.71 U	0.33 U
		33	0.36 U	1.5 U	0.55 U	0.87 U	0.4 U
		39	0.86 J	1.8 U	0.68 U	1.1 U	0.49 U
		44	1.3 J	1.5 U	0.57 U	0.9 U	0.41 U
		49	3.4 J	1.5 U	0.56 U	0.88 U	0.4 U
		52.5	76	1.5 U	0.73 J	0.86 U	0.39 U
		56	9.2 J	1.5 U	0.56 U	0.87 U	0.4 U
		64.5	25	1.8 U	0.91 J	1.1 U	0.49 U
	Average		9	***	0.4	***	***
211-A-025	9/10/2012	3	71	1.7 U	13	0.97 U	0.45 U
		6.5	92	2.1 U	28	1.2 U	0.55 U
		11	80	1.6 U	23	0.94 U	0.43 U
		(15.5)DUP	33	1.7 U	9 J	0.97 U	0.44 U
		15.5	80	1.8 U	20	1.1 U	0.48 U
		22.5	54	1.5 U	14	0.88 U	0.4 U
		25.5	45	1.4 U	1.2 J	0.82 U	0.38 U
		32.5	63	1.6 U	1.4 J	0.95 U	0.44 U
		39.5	420	23 U	10 U	7.9 U	27 U
		44.5	1,400	23 U	44 J	7.7 U	26 U
		49.9	540	27 U	24 J	9.1 U	31 U
		50.1	27	1.5 U	0.9 J	0.88 U	0.4 U
		56.5	7 J	1.9 U	0.72 U	1.1 U	0.52 U
		64	68	1.7 U	0.65 U	1 U	0.47 U
	Average		213	***	13	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-026	9/7/2012	4	0.43 U	1.8 U	0.66 U	1 U	0.47 U
		9	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		14	0.41 U	1.7 U	0.62 U	0.98 U	0.45 U
		18.5	0.34 U	1.4 U	0.52 U	0.82 U	0.37 U
		24.9	0.35 U	1.5 U	0.55 U	0.85 U	0.39 U
		29	0.36 U	1.5 U	0.55 U	0.86 U	0.4 U
		30.5	0.41 J	1.4 U	0.51 U	0.8 U	0.37 U
		36	12	15	2.3 J	0.99 U	0.45 U
		44	12	14	4.1 J	0.88 U	0.84 J
		47	14	20	3.9 J	0.88 U	1 J
		51	7.2 J	6.6 J	2.2 J	0.96 U	0.44 U
		55.5	14	1.6 U	0.65 J	0.92 U	0.42 U
		61.5	1.2 J	1.6 U	0.59 U	0.92 U	0.42 U
	Average		4.8	4.8	1.2	***	0.3
211-A-027	9/11/2012	2	0.43 U	1.8 U	0.66 U	1 U	0.47 U
		8.5	0.53 U	2.2 U	0.81 U	1.3 U	0.58 U
	9/18/2012	14	0.4 U	1.7 U	0.62 U	0.97 U	0.44 U
		(14)DUP	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		16.5	0.35 U	1.5 U	0.55 U	0.85 U	0.39 U
		21	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		28	0.35 U	1.4 U	0.54 U	0.84 U	0.39 U
		31.5	0.46 J	1.7 J	0.51 U	0.8 U	0.36 U
		36.5	3.4 J	1.6 U	0.59 U	0.92 U	0.42 U
		44.5	47	1.4 U	0.53 U	0.83 U	0.38 U
		45.5	620	20 U	8.7 U	6.8 U	23 U
		51	51	1.7 U	0.63 U	0.99 U	0.45 U
		59	29	1.7 U	0.67 J	1 U	0.46 U
		66.5	17	1.9 J	0.86 J	1.1 U	0.48 U
	Average		55	1.6	0.7	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-028	9/24/2012	4	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		9	0.43 U	1.8 U	0.66 U	1 U	0.48 U
		14	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		19	0.76 J	55	0.57 U	0.89 U	0.41 U
		22.5	0.44 U	1.8 J	0.67 U	1.1 U	0.48 U
		26	210	290	0.92 U	1.4 U	0.66 U
		34	220 J	55 J	11 U	8.9 U	30 U
		38.5	3,700	4,200	33 J	9.1 U	31 U
		42.5	2,800	3,800	28 J	7.8 U	27 U
		48	1,600	1,800	33 J	8.1 U	27 U
		50.5	1,700	1,400	38 J	8.3 U	28 U
		55.1	42	79	4.2 J	0.95 U	0.43 U
		61	180	66	16	1.3 U	0.58 U
		Average	804	904	12	***	***
211-A-029	9/25/2012	4	0.4 U	1.7 U	0.62 U	0.97 U	0.44 U
		9	0.51 U	2.1 U	0.79 U	1.2 U	0.56 U
		14	0.4 U	1.7 U	0.62 U	0.98 U	0.45 U
		18	0.31 U	1.3 U	0.48 U	0.74 U	0.34 U
		24.9	23	18	0.54 U	0.85 U	0.39 U
		28.5	440	240	9 U	7 U	24 U
		(32)DUP	110	77	2.5 J	1.4 U	0.65 U
		32	480	360	12 U	9.4 U	32 U
		38	2,600	2,900	62 J	9.2 U	31 U
		40.5	870	880	11 U	8.2 U	28 U
		48.5	270	350	11 U	8.6 U	29 U
		50.5	22	27	0.61 U	0.96 U	0.44 U
		55.1	4 J	4.4 J	0.86 J	1 U	0.46 U
		64	100	15	9.2 J	1.1 U	0.49 U
		Average	351	348	7.0	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-030	9/25/2012	9	0.39 U	1.6 U	0.61 U	0.95 U	0.43 U
		14	0.36 U	1.5 U	0.56 U	0.87 U	0.4 U
		19	0.36 U	30	0.56 U	0.87 U	0.4 U
		23.5	21 U	29 U	13 U	9.9 U	34 U
		29.9	0.51 U	2.1 U	0.78 U	1.2 U	0.56 U
		32.5	97 J	61 J	11 U	8.9 U	30 U
		39	0.38 U	3.5 J	0.58 U	0.91 U	0.42 U
		40.1	0.38 U	1.6 U	0.59 U	0.92 U	0.42 U
		49	0.39 U	8.9 J	0.61 U	0.95 U	0.44 U
		54.5	4.8 J	2 J	0.76 J	0.91 U	0.41 U
		58	20	25	1.9 J	1 U	0.47 U
		61	12	15	1.5 J	0.93 U	0.42 U
	Average		12	14	1.5	***	***
211-A-031	9/26/2012	0.1	0.46 U	1.9 U	0.71 U	1.1 U	0.51 U
		9	0.41 U	1.7 U	0.64 U	1 U	0.46 U
		(14)DUP	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		14	0.35 U	1.4 U	0.53 U	0.83 U	0.38 U
		19	2.9 J	1.5 U	0.9 J	0.85 U	0.39 U
		23	1 J	1.6 U	0.61 U	0.95 U	0.44 U
		28	7.8 J	1.5 U	0.57 U	0.9 U	0.41 U
		34.5	35	1.9 U	0.7 U	1.1 U	0.5 U
		35.5	310	22 U	9.5 U	7.4 U	25 U
		40.5	18 U	24 U	10 U	8.1 U	28 U
		49.5	42	1.6 U	0.64 J	0.93 U	0.43 U
		50.5	29	1.8 U	0.69 U	1.1 U	0.49 U
		56.5	5.8 J	1.6 U	0.62 J	0.96 U	0.44 U
		61.5	3.5 J	1.8 U	0.67 U	1 U	0.48 U
	Average		32	***	1.1	***	***

SWMU 211-A VOC Analyes (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-032	9/28/2012	1.3	0.38 U	1.6 U	0.59 U	0.93 U	0.42 U
		9	0.41 U	1.7 U	0.64 U	1 U	0.46 U
		14	0.37 U	1.5 U	0.58 U	0.9 U	0.41 U
		19	1.1 J	1.5 U	0.57 U	0.89 U	0.41 U
		24.9	4.7 J	1.8 U	2 J	1.1 U	0.49 U
		26	6.6 J	1.5 U	1.7 J	0.9 U	0.41 U
		33	0.47 J	1.5 U	0.54 U	0.85 U	0.39 U
		38	33	1.8 U	0.68 U	1.1 U	0.48 U
		42.5	29	1.5 U	0.58 U	0.9 U	0.41 U
		49	3.3 J	1.5 U	0.57 U	0.9 U	0.41 U
		54.9	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		58.5	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		Average	6.6	***	0.6	***	***
211-A-033	10/1/2012	4	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		9	0.38 U	1.6 U	0.59 U	0.92 U	0.42 U
		14	0.37 U	1.5 U	0.58 U	0.9 U	0.41 U
		19	0.35 U	1.5 U	0.55 U	0.85 U	0.39 U
		21.5	0.33 U	1.4 U	0.51 U	0.8 U	0.37 U
		29.9	3.6 J	2.4 J	0.64 U	1 U	0.46 U
		(34)DUP	12	1.9 J	0.84 J	0.8 U	0.36 U
		34	60	16	2.1 J	0.84 U	0.38 U
		36	1,100	1,100	46 J	8 U	27 U
		44.5	700	540	29 J	7.4 U	25 U
		49.5	300	240	9.3 U	7.3 U	25 U
		50.5	130 J	58 J	12 U	9.7 U	33 U
		56.5	0.48 J	1.7 U	0.64 U	1 U	0.46 U
		62	14	3.6 J	8.4 J	0.89 U	0.41 U
		Average	166	140	7.1	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-035	10/2/2012	1.9	0.4 U	1.7 U	0.62 U	0.97 U	0.44 U
		8.6	0.39 U	1.6 U	0.61 U	0.95 U	0.44 U
		13.4	0.38 U	2.5 J	3.6 J	0.9 U	0.41 U
		18.5	1.6 J	33	12	0.87 U	0.4 U
		24	7.6 J	30	6.9 J	0.89 U	0.41 U
		27	2.1 J	1.7 J	0.53 U	0.84 U	0.38 U
		30.5	35	27	0.57 U	0.89 U	0.4 U
		37	580	590	11 U	8.3 U	28 U
		(41.5)DUP	420	350	11 U	8.2 U	28 U
		41.5	400	400	10 U	8 U	27 U
		49	210 J	26 J	11 U	8.4 U	29 U
		51.5	680	360	10 U	8.2 U	28 U
		55.5	17	1.7 U	2 J	1 U	0.46 U
		66.5	25	9.3 J	4 J	0.98 U	0.45 U
	Average		170	131	4	***	***
211-A-036	10/3/2012	0.1	0.41 U	1.7 U	0.64 U	1 U	0.46 U
		9	0.47 U	1.9 U	0.73 U	1.1 U	0.52 U
		14.7	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		19	0.67 J	2.1 J	0.57 U	0.89 U	0.41 U
		22	280 J	31 U	13 U	10 U	35 U
		26.5	810	340	9.9 U	7.8 U	26 U
		31.5	1,400	1,600	8.6 U	6.7 U	23 U
		35.5	2,800	3,700	51 J	8.2 U	28 U
		44.5	3,800	3,900	110 J	7.6 U	28 J
		47.5	4,800	3,300	77 J	8 U	27 U
		50.1	1,300	690	12 U	9.1 U	31 U
		55.5	3 J	1.5 U	0.57 U	0.89 U	0.41 U
		61	33	12	4.1 J	0.99 U	0.45 U
	Average		1,171	1,043	20	***	9

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-037	2/25/2013	4	0.4 U	1.6 U	0.61 U	0.96 U	0.44 U
		9	0.39 U	1.6 U	0.61 U	0.95 U	0.43 U
		14	0.42 U	1.7 U	0.65 U	1 U	0.47 U
		16	0.38 U	1.6 U	0.58 U	0.91 U	0.41 U
		24	0.47 U	1.9 U	0.72 U	1.1 U	0.51 U
		(24)Dup	0.53 U	2.2 U	0.81 U	1.3 U	0.58 U
		25.5	0.36 U	1.5 U	0.55 U	0.87 U	0.4 U
		34	0.51 U	2.1 U	0.78 U	1.2 U	0.56 U
		35.5	0.54 U	2.2 U	0.84 U	1.3 U	0.6 U
		44	0.37 U	2.3 J	0.57 U	0.89 U	0.41 U
		49.5	0.37 U	1.5 U	0.57 U	0.89 U	0.41 U
		54.5	2.2 J	1.7 U	0.65 U	1 U	0.47 U
		56.5	1.4 J	2.5 U	0.93 U	1.5 U	0.67 U
		62	1.2 J	1.8 U	0.67 U	1 U	0.48 U
	Average		0.5	***	***	***	***
211-A-038	2/25/2013	3	0.37 U	1.5 U	0.58 U	0.9 U	0.41 U
		7.5	20 U	27 U	12 U	9.2 U	31 U
		12	23 U	32 U	14 U	11 U	36 U
		15.5	0.41 U	1.7 U	0.64 U	1 U	0.46 U
		20.5	26	1.6 U	6.8 J	0.96 U	2.2 J
		28.5	0.36 U	1.5 U	0.55 U	0.86 U	0.39 U
		32.5	0.37 U	1.5 U	0.57 U	0.89 U	0.41 U
		39	30	1.6 U	7.5 J	0.92 U	0.42 U
		43	61	2 J	10	0.91 U	0.42 U
		49.9	0.98 J	1.6 U	0.6 U	0.93 U	0.43 U
		54.5	6.6 J	1.5 U	1.2 J	0.89 U	0.4 U
		56	20	3.6 J	6.6 J	0.97 U	0.44 U
		62	11	1.8 J	4 J	0.89 U	0.41 U
	Average		14	3.3	3.9	***	2.9

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-039	2/26/2013	9	0.41 U	1.7 U	0.62 U	0.98 U	0.45 U
		14	0.44 U	1.8 U	0.67 U	1.1 U	0.48 U
		(14)Dup	0.46 U	1.9 U	0.7 U	1.1 U	0.5 U
		19	0.36 U	1.5 U	0.55 U	0.86 U	0.4 U
		23	0.39 U	1.6 U	0.59 U	0.93 U	0.43 U
		27.5	0.44 U	1.8 U	0.68 U	1.1 U	0.49 U
		33	0.34 U	1.4 U	0.55 J	0.83 U	0.38 U
		37	0.41 U	3.4 J	1.5 J	1 U	0.46 U
		42	0.38 U	15	1.8 J	0.92 U	0.42 U
		49.5	0.34 U	12	0.53 U	0.83 U	0.38 U
		51.5	0.39 U	57	0.66 J	0.93 U	0.43 U
		56	1 J	1.5 U	0.57 U	0.89 U	0.41 U
		64	4.5 J	2.3 U	0.86 U	1.3 U	0.61 U
		Average	0.6	7.3	0.57	***	***
211-A-040	2/26/2013	3	0.4 U	1.6 U	0.61 U	0.96 U	0.44 U
		9	0.4 U	1.7 U	0.62 U	0.97 U	0.44 U
		14	0.38 U	1.6 U	0.59 U	0.92 U	0.42 U
		16.5	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		22	0.53 U	2.2 U	0.82 U	1.3 U	0.59 U
		26	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		34.5	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		36	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		(36)Dup	0.35 U	1.5 U	0.54 U	0.85 U	0.39 U
		41.5	0.4 U	1.7 U	0.62 U	0.97 U	0.44 U
		48.5	0.37 U	2.4 J	0.56 U	0.88 U	0.4 U
		51.5	0.37 U	1.5 U	0.57 U	0.89 U	0.41 U
		56	0.36 U	21	0.55 U	0.86 U	0.39 U
		61	0.38 U	3.2 J	0.58 U	0.91 U	0.42 U
		Average	***	2.5	***	***	***

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-041	2/27/2013	4	0.39 U	1.6 U	0.61 U	0.95 U	0.44 U
		9	0.41 U	1.7 U	0.63 U	0.98 U	0.45 U
		14.5	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		18.5	0.37 U	8.8 J	0.57 U	0.89 U	0.41 U
		(18.5)Dup	0.35 U	8.7 J	0.54 U	0.84 U	0.39 U
		24	0.53 U	2.2 U	0.82 U	1.3 U	0.59 U
		27	0.34 U	1.4 U	0.53 U	0.83 U	0.38 U
		34.5	1.7 J	1.6 J	2.2 J	0.86 U	1.1 J
		39	71	120	14	1 U	6.5 J
		41	76	140	11	0.86 U	6.4 J
		49	33	170	8.5 J	0.84 U	0.72 J
		50.5	18	26	4.1 J	0.98 U	0.45 U
		55.1	27	2.2 J	2.8 J	1 U	0.46 U
		63	68	21	15	0.87 U	0.4 U
		Average	21	36	4.3	***	1.2
211-A-042	2/27/2013	9	0.41 U	1.7 U	2.8 J	0.99 U	0.45 U
		14.5	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		17	0.37 U	1.5 U	0.57 U	0.89 U	0.41 U
		22.5	0.33 U	1.4 U	0.52 U	0.81 U	0.37 U
		27.5	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		31	0.38 U	1.6 U	0.59 U	0.93 U	0.42 U
		39	61	68	9.6 J	0.95 U	2 J
		42	120	94	16	0.98 U	2.4 J
		48	82	40	9 J	0.92 U	0.6 J
		54.9	40	21	5.7 J	0.88 U	0.4 U
		57	0.38 U	1.6 U	0.58 U	0.91 U	0.41 U
		62.5	27	6.4 J	5.2 J	0.98 U	0.45 U
		Average	28	20	4.2	***	0.6

SWMU 211-A VOC Analyses (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
			75	137	619	5290	570
211-A-043	3/4/2013	3.5	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		9	0.42 U	1.7 U	0.97 J	1 U	0.46 U
		14	0.39 U	1.6 U	0.6 U	0.93 U	0.43 U
		(14)Dup	0.4 U	1.6 U	0.61 U	0.96 U	0.44 U
		17.5	0.35 U	1.4 U	0.54 U	0.84 U	0.38 U
		22.5	0.32 U	1.3 U	1.2 J	0.78 U	0.36 U
		29	2.7 J	1.7 U	8.3 J	0.98 U	0.45 U
		32.5	1.8 J	1.5 U	5.2 J	0.9 U	0.41 U
		36	9.2	2 J	28	0.86 U	0.39 U
		44.9	24	13	32	0.94 U	0.43 U
		49	39	6.7 J	34	0.81 U	0.37 U
		53.5	30	1.7 U	46	0.97 U	0.44 U
		55.1	42	5.1 J	48	0.84 U	0.39 U
		62	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		Average	11	2.5	15	***	***
211-A-044	3/6/2013	4	5.5 J	1.7 U	100	1 U	78
		(4)Dup	4.2 J	1.7 U	49	1 U	62
		6	20 U	28 U	630	9.4 U	32 U
		10.5	18 U	25 U	520	8.5 U	29 U
		18.5	0.46 U	1.9 U	1.2 J	1.1 U	0.5 U
		23	5 J	1.3 U	31	0.76 U	0.96 J
		26	11	1.9 U	99	1.1 U	9.2 J
		33.5	8.5 J	1.7 U	64	1 U	3.2 J
		36.5	18	1.8 J	98	0.82 U	4.8 J
		44.5	42	2.6 J	130	0.88 U	9.9
		49	76	9.6	110	0.85 U	0.77 J
		54.5	2.7 J	1.5 U	4.8 J	0.86 U	0.39 U
		55.5	2.5 J	1.9 U	1.7 J	1.1 U	0.52 U
		62.5	0.47 U	1.9 U	0.72 U	1.1 U	0.51 U
		Average	14	3.4	131	***	14

SWMU 211-A VOC Analyses (Continued)

Notes:

1. Groundwater Protection Remediation Goals from *Remedial Design Work Plan for Solid Waste Management Units 1, 211-A, and 211-B Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky*, (DOE 2012a).
2. J—Indicates an estimated value.
3. U—Compound analyzed for but not detected at or below the lowest concentration reported.
4. DUP—Indicated that a duplicate sample was taken for the interval given in parentheses.
5. Sample depth represents the discrete depth at which an EnCore® sample was taken.
6. For "U" qualified samples a value of one half the concentration reported was used in calculating the average borehole concentration.
7. ***—Indicates average concentration not calculated as all boring samples were "U" qualified for specific VOC.
8. Yellow shading and bold text indicate an exceedance of Groundwater Protection Remediation Goals.
9. Soil boring 211-A-007 was not collected.
10. Soil boring 211-A-034 was collected and archived. Boring was not logged or screened for VOC impacts.

APPENDIX F

HYDRAULIC CONDUCTIVITY AND GRAIN SIZE TESTS

THIS PAGE INTENTIONALLY LEFT BLANK

Grain Size Analysis

ASTM D422

Advanced Terra Testing

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-05

BORING NO. 211-A-006
DEPTH 12-15.5'
SAMPLE NO. 211A006GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/26/12 KD
DATE TESTED 10/10/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No


Wt. Wet Soil & Pan (g) 40.14
Wt. Dry Soil & Pan (g) 39.59
Wt. Lost Moisture (g) 0.55
Wt. of Pan Only (g) 3.07
Wt. of Dry Soil (g) 36.52
Moisture Content % 1.5

Wt. Total Sample Wet (g) 1120.50
Weight of + #10 Before Washing (g) 0.92
Weight of + #10 After Washing (g) 0.87
Weight of - #10 Wet (g) 1119.58
Weight of - #10 Dry (g) 1103.02
Wt. Total Sample Dry (g) 1103.89

Wt. Hydrom. Sample Wet (g) 62.50
Wt. Hydrom. Sample Dry (g) 61.57

Calc. Wt. "W" (g) 61.62
Calc. Mass + #10 0.05

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	0.71	0.71	0.71	0.1	99.9
#10	0.00	0.16	0.16	0.87	0.1	99.9
#20	3.03	3.06	0.03	0.03	0.1	99.9
#40	3.11	3.19	0.08	0.10	0.2	99.8
#60	3.07	3.42	0.35	0.45	0.8	99.2
#100	3.01	4.84	1.83	2.28	3.8	96.2
#200	3.01	4.94	1.93	4.21	6.9	93.1

Data entered by: DAW
Data checked by: 
FileName: LKH0NSZ1

Date: 10/12/2012
Date: 10/12/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-05

BORING NO. 211-A-006
DEPTH 12-15.5'
SAMPLE NO. 211A006GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/26/12 KD
DATE TESTED 10/10/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	22.5
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01325
Value of "alpha"	1.00	Wt. Dry Sample "W"	61.622
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	54.75	49.75	80.7	80.7	7.31	0.0358
2.0	48.25	43.25	70.2	70.2	8.38	0.0271
5.0	39.00	34.00	55.2	55.2	9.89	0.0186
15.0	28.00	23.00	37.3	37.3	11.70	0.0117
30.0	23.00	18.00	29.2	29.2	12.52	0.0086
60.0	19.00	14.00	22.7	22.7	13.17	0.0062
120.0	17.75	12.75	20.7	20.7	13.38	0.0044
250.0	16.75	11.75	19.1	19.1	13.54	0.0031
1440.0	15.25	10.25	16.6	16.6	13.79	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: DAW
Data checked by: DAW
FileName: LKH0NSZ1

Date: 10/12/2012
Date: 10/12/12



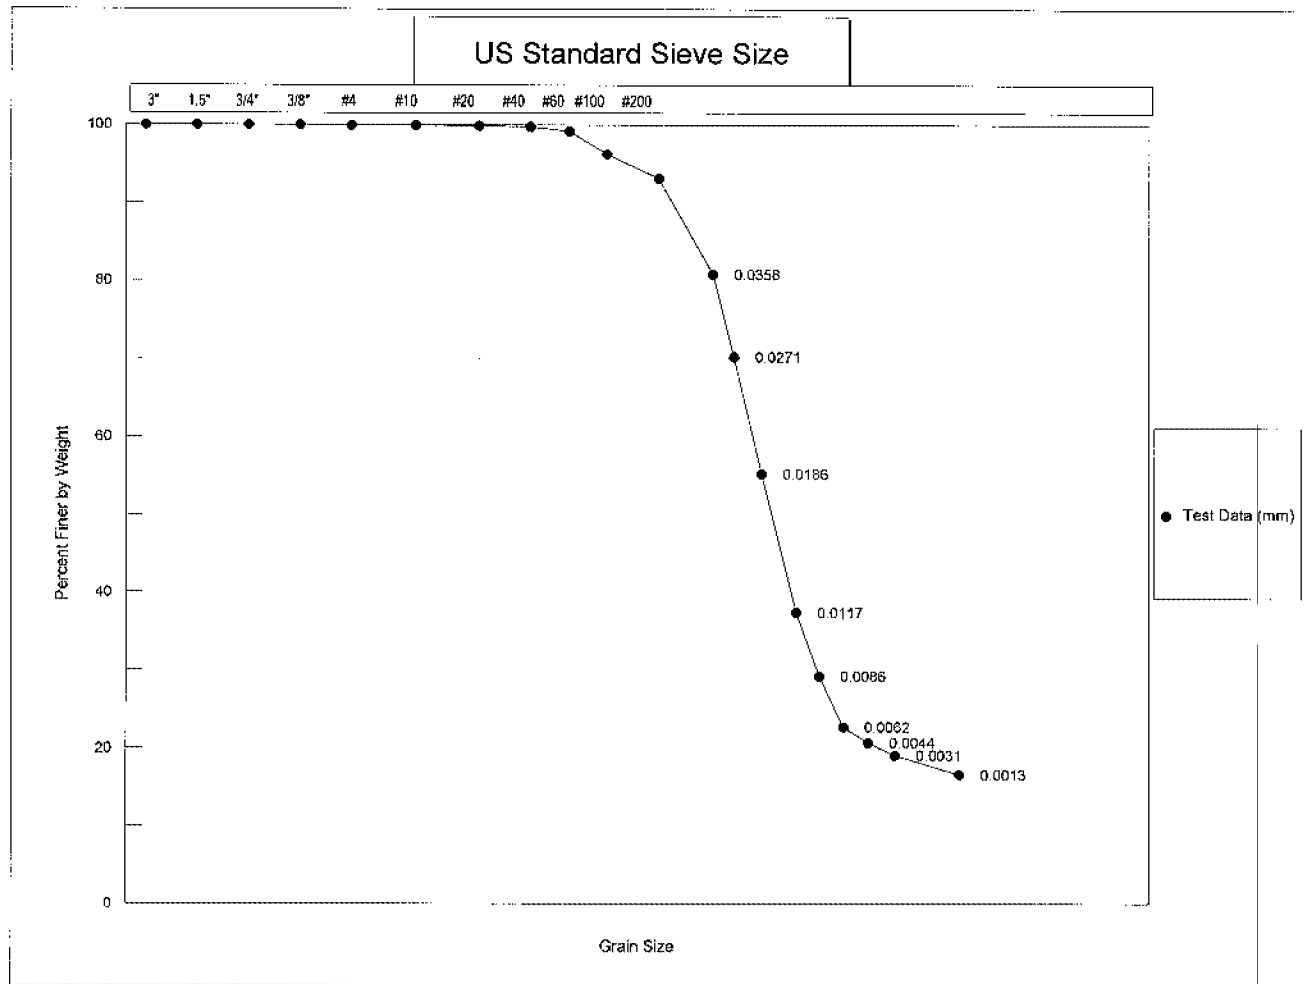

COBBLES		GRAVEL		SAND			SILT OR CLAY (mm)	
		COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL				SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky Boring No.: 211-A-006
 Job Number: 2855-05 Depth: 12-15.5'
 Classification: **Classification Not Performed**

Sample No.: 211A006GRNSZ1

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-05

BORING NO. 211-A-006
DEPTH
SAMPLE NO. 211A006GRNSZ2
SOIL DESCR. ER12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/26/12 KD
DATE TESTED 10/10/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 34.10
Wt. Dry Soil & Pan (g) 33.65
Wt. Lost Moisture (g) 0.45
Wt. of Pan Only (g) 2.42
Wt. of Dry Soil (g) 31.23
Moisture Content % 1.4

Wt. Total Sample Wet (g) 929.90
Weight of + #10 Before Washing (g) 494.76
Weight of + #10 After Washing (g) 470.13
Weight of - #10 Wet (g) 435.14
Weight of - #10 Dry (g) 453.24
Wt. Total Sample Dry (g) 923.37
Calc. Wt. "W" (g) 173.72
Calc. Mass + #10 88.45

Wt. Hydrom. Sample Wet (g) 86.50
Wt. Hydrom. Sample Dry (g) 85.27

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	42.14	42.14	42.14	4.6	95.4
3/8"	0.00	102.72	102.72	144.86	15.7	84.3
#4	0.00	174.75	174.75	319.61	34.6	65.4
#10	0.00	150.52	150.52	470.13	50.9	49.1
#20	3.05	18.15	15.10	15.10	59.6	40.4
#40	3.06	17.47	14.41	29.51	67.9	32.1
#60	3.05	15.15	12.10	41.62	74.9	25.1
#100	2.98	9.72	6.74	48.36	78.7	21.3
#200	3.08	6.90	3.82	52.17	80.9	19.1

Data entered by: DAW
Data checked by: DAW
FileName: LKH0NSZ2

Date: 10/12/2012
Date: 10/12/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-05

BORING NO. 211-A-006
DEPTH
SAMPLE NO. 211A006GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical


SAMPLED 09/26/12 KD
DATE TESTED 10/10/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer # ASTM 152 H
Sp. Gr. of Soil 2.65
Value of "alpha" 1.00
Deflocculant Sodium Hexametaphosphate
Defloc. Corr'n 5.0
Meniscus Corr'n 0.0

Temp., Deg. C 22.5
Temp. Coef. K 0.01325
Wt. Dry Sample "W" 173.718
% of Total Sample 100.0


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	36.75	31.75	18.3	18.3	10.26	0.0424
2.0	36.00	31.00	17.8	17.8	10.39	0.0302
5.0	33.00	28.00	16.1	16.1	10.88	0.0195
15.0	30.25	25.25	14.5	14.5	11.33	0.0115
30.0	29.00	24.00	13.8	13.8	11.53	0.0082
60.0	28.00	23.00	13.2	13.2	11.70	0.0058
120.0	27.25	22.25	12.8	12.8	11.82	0.0042
250.0	27.00	22.00	12.7	12.7	11.86	0.0029
1440.0	26.00	21.00	12.1	12.1	12.03	0.0012

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: DAW
Data checked by: 
FileName: LKH0NSZ2

Date: 10/12/2012
Date: 10/12/12



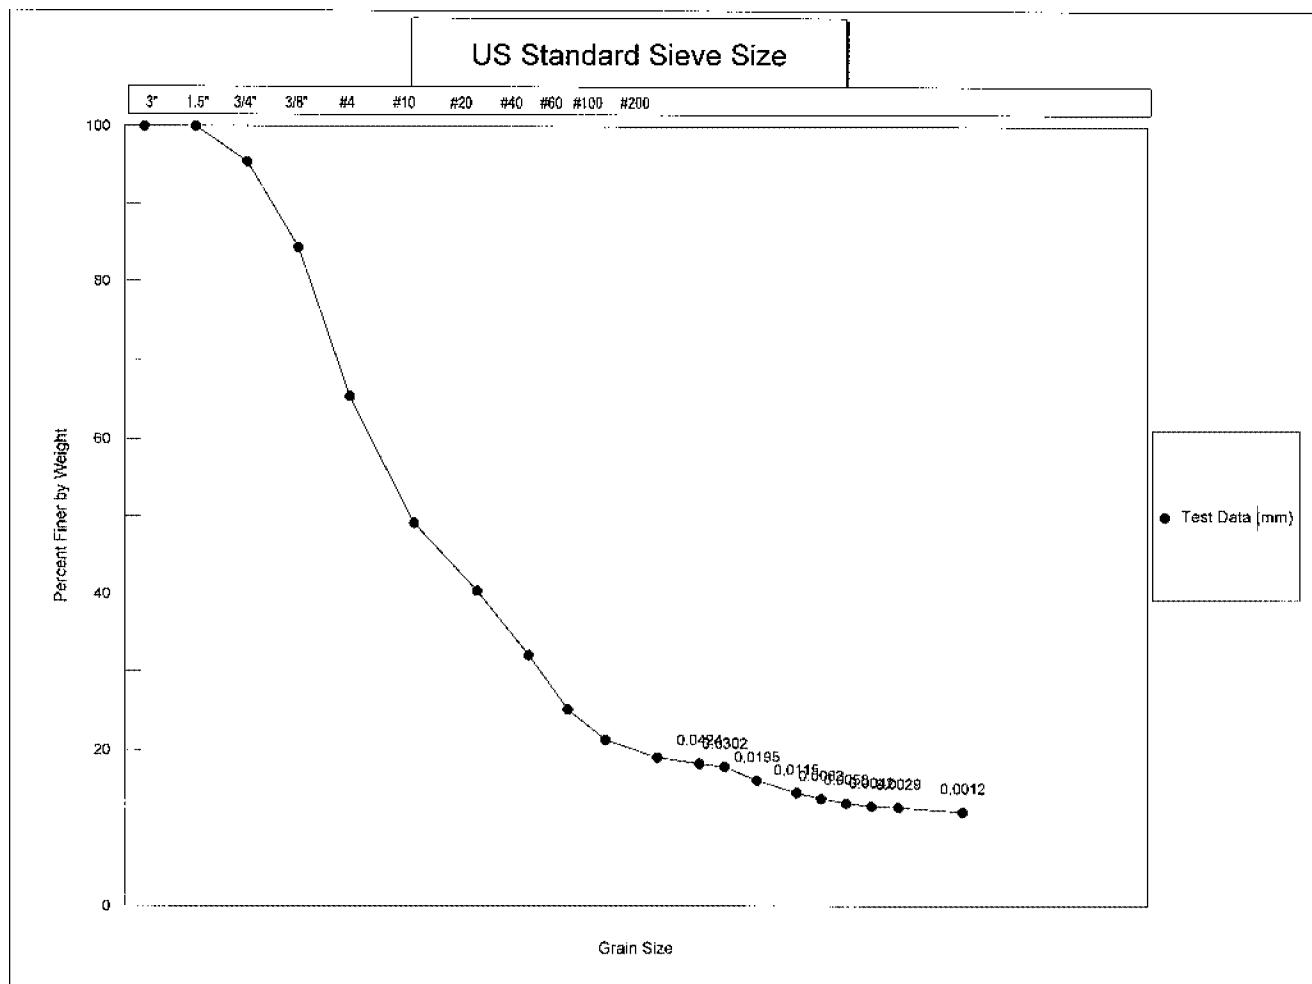

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL				SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky

Boring No.: 211-A-006

Sample No.: 211A006GRNSZ2

Job Number: 2855-05

Depth:

Classification: **Classification Not Performed**

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-05

BORING NO. 211-A-006
DEPTH
SAMPLE NO. 211A006GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/26/12 KD
DATE TESTED 10/10/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 41.26
Wt. Dry Soil & Pan (g) 40.84
Wt. Lost Moisture (g) 0.42
Wt. of Pan Only (g) 3.00
Wt. of Dry Soil (g) 37.84
Moisture Content % 1.1

Wt. Total Sample Wet (g) 1241.91
Weight of + #10 Before Washing (g) 19.21
Weight of + #10 After Washing (g) 18.33
Weight of - #10 Wet (g) 1222.70
Weight of - #10 Dry (g) 1210.15
Wt. Total Sample Dry (g) 1228.48
Calc. Wt. "W" (g) 62.93
Calc. Mass + #10 0.94

Wt. Hydrom. Sample Wet (g) 62.68
Wt. Hydrom. Sample Dry (g) 61.99

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	8.17	8.17	8.17	0.7	99.3
3/8"	0.00	4.84	4.84	13.01	1.1	98.9
#4	0.00	3.19	3.19	16.20	1.3	98.7
#10	0.00	2.13	2.13	18.33	1.5	98.5
#20	3.07	3.28	0.21	0.21	1.8	98.2
#40	3.32	4.38	1.06	1.26	3.5	96.5
#60	3.03	8.93	5.90	7.16	12.9	87.1
#100	3.08	13.97	10.89	18.06	30.2	69.8
#200	2.99	12.62	9.62	27.68	45.5	54.5

Data entered by: SAW DAW
Data checked by: SAW
FileName: LKH0NSZ3

Date: 10/12/2012
Date: 10/12/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-05


BORING NO. 211-A-006
DEPTH
SAMPLE NO. 211A006GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/26/12 KD
DATE TESTED 10/10/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	22.6
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01323
Value of "alpha"	1.00	Wt. Dry Sample "W"	62.927
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Reading		100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
	Original	Corrected "R"				
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	34.75	29.75	47.3	47.3	10.59	0.0431
2.0	33.00	28.00	44.5	44.5	10.88	0.0309
5.0	31.75	26.75	42.5	42.5	11.08	0.0197
15.0	28.25	23.25	36.9	36.9	11.66	0.0117
30.0	26.25	21.25	33.8	33.8	11.99	0.0084
60.0	24.50	19.50	31.0	31.0	12.27	0.0060
120.0	23.00	18.00	28.6	28.6	12.52	0.0043
250.0	21.50	16.50	26.2	26.2	12.76	0.0030
1440.0	20.00	15.00	23.8	23.8	13.01	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: DAW
Data checked by: 
FileName: LKH0NSZ3

Date: 10/12/2012
Date: 10/12/12



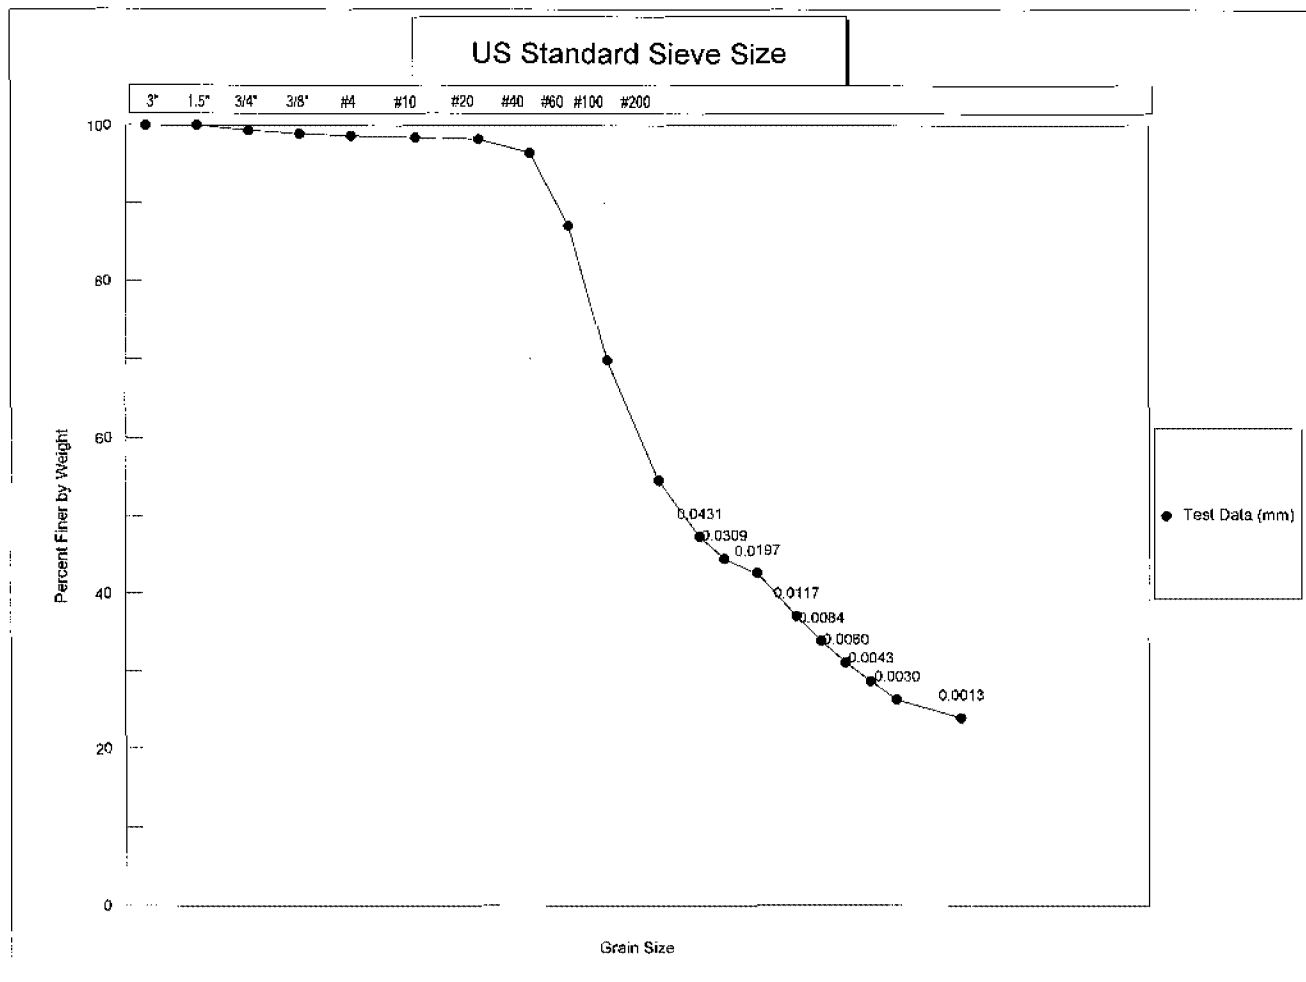

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL			SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRN	COARSE	MED	FINE	

USCS

WENTWORTH

Client: LATA Kentucky

Boring No.: 211-A-006

Sample No.: 211A006GRNSZ3

Job Number: 2855-05

Depth:

Classification: **Classification Not Performed**

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-2

BORING NO. 211-A-002
DEPTH 9-13'
SAMPLE NO. 211A002GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 8/30/12 KD
DATE TESTED 9/13/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 38.74
Wt. Dry Soil & Pan (g) 37.31
Wt. Lost Moisture (g) 1.43
Wt. of Pan Only (g) 3.04
Wt. of Dry Soil (g) 34.27
Moisture Content % 4.2

Wt. Total Sample Wet (g) 1213.18
Weight of + #10 Before Washing (g) 4.38
Weight of + #10 After Washing (g) 3.66
Weight of - #10 Wet (g) 1208.80
Weight of - #10 Dry (g) 1161.07
Wt. Total Sample Dry (g) 1164.73

Wt. Hydrom. Sample Wet (g) 77.11
Wt. Hydrom. Sample Dry (g) 74.02

Calc. Wt. "W" (g) 74.25
Calc. Mass + #10 0.23

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	1.15	1.15	1.15	0.1	99.9
#4	0.00	0.83	0.83	1.98	0.2	99.8
#10	0.00	1.68	1.68	3.66	0.3	99.7
#20	2.99	3.08	0.09	0.09	0.4	99.6
#40	2.99	3.32	0.33	0.42	0.9	99.1
#60	3.03	4.00	0.97	1.39	2.2	97.8
#100	3.12	4.66	1.54	2.93	4.3	95.7
#200	3.04	4.30	1.26	4.19	6.0	94.0

Data entered by: MLM
Data checked by: *MLM*
FileName: LKHYS21

Date: 09/17/2012
Date: 9/17/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-2

BORING NO. 211-A-002
DEPTH 9-13'
SAMPLE NO. 211A002GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 8/30/12 KD
DATE TESTED 9/13/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	23.3
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01312
Value of "alpha"	1.00	Wt. Dry Sample "W"	74.253
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	4.5		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Reading Original	Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	42.50	38.00	51.2	51.2	9.32	0.0401
2.0	39.50	35.00	47.1	47.1	9.81	0.0291
5.0	34.50	30.00	40.4	40.4	10.63	0.0191
15.0	26.50	22.00	29.6	29.6	11.94	0.0117
30.0	22.00	17.50	23.6	23.6	12.68	0.0085
60.0	19.00	14.50	19.5	19.5	13.17	0.0061
120.0	17.50	13.00	17.5	17.5	13.42	0.0044
250.0	15.25	10.75	14.5	14.5	13.79	0.0031
1440.0	13.00	8.50	11.4	11.4	14.16	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: SLW
FileName: LKHYS21

Date: 09/17/2012
Date: 9/17/12



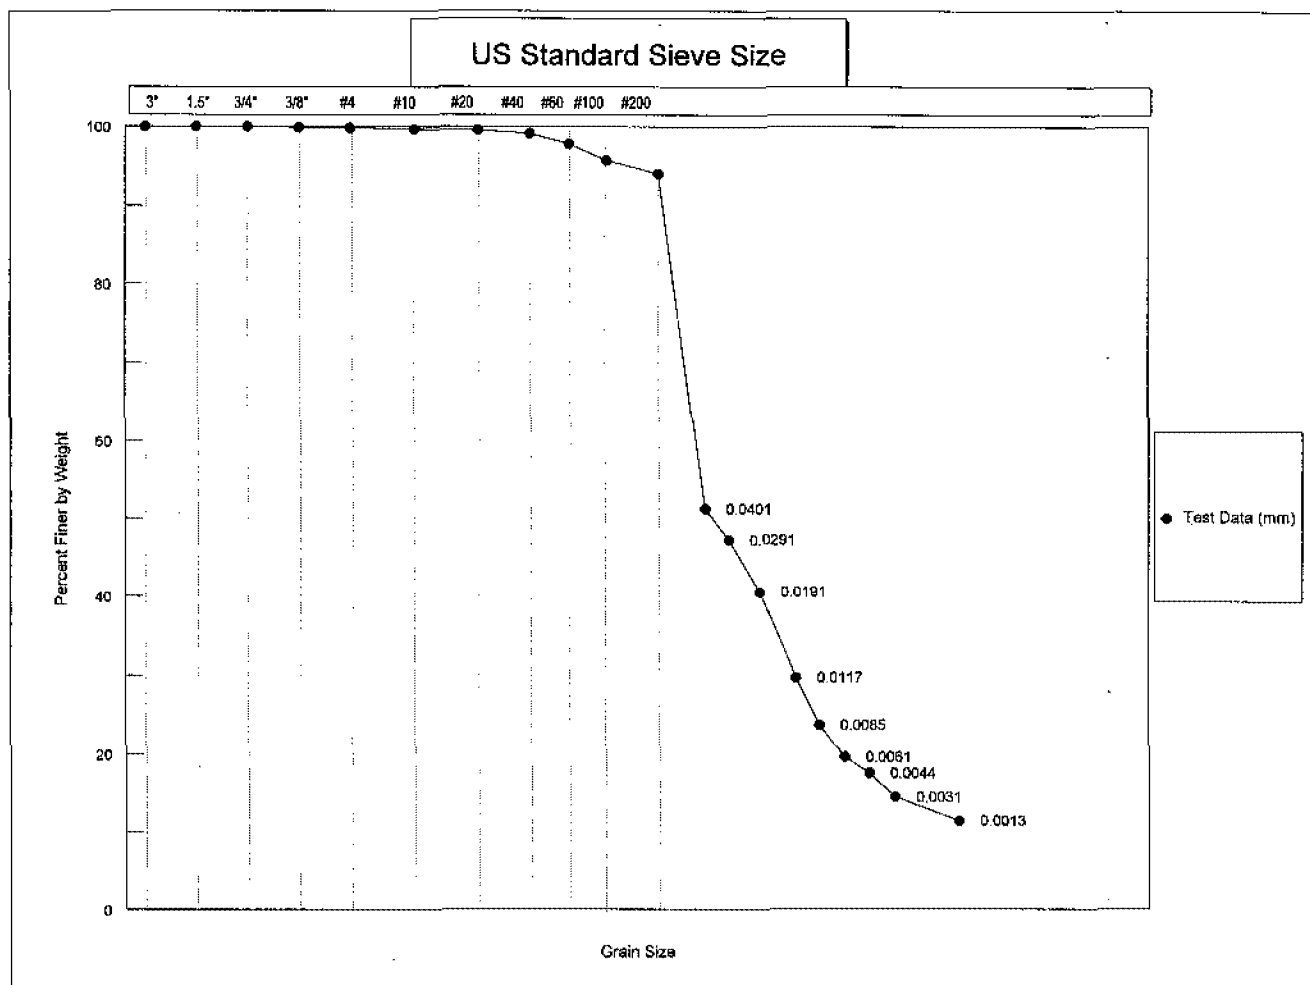

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky

Job Number: 2855-2

Classification:

Boring No.: 211-A-002

Depth: 9-13'

Classification Not Performed

Sample No.: 211A002GRNSZ1

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-2

BORING NO. 211-A-002
DEPTH 23-26'
SAMPLE NO. 211A002GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 8/30/12 KD
DATE TESTED 9/13/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 38.48
Wt. Dry Soil & Pan (g) 38.00
Wt. Lost Moisture (g) 0.48
Wt. of Pan Only (g) 3.15
Wt. of Dry Soil (g) 34.85
Moisture Content % 1.4

Wt. Total Sample Wet (g) 1087.63
Weight of + #10 Before Washing (g) 562.03
Weight of + #10 After Washing (g) 502.46
Weight of - #10 Wet (g) 525.60
Weight of - #10 Dry (g) 577.22
Wt. Total Sample Dry (g) 1079.68

Wt. Hydrom. Sample Wet (g) 91.49
Wt. Hydrom. Sample Dry (g) 90.25

Calc. Wt. "W" (g) 168.81
Calc. Mass + #10 78.56

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	17.41	17.41	17.41	1.6	98.4
3/8"	0.00	121.64	121.64	139.05	12.9	87.1
#4	0.00	184.36	184.36	323.41	30.0	70.0
#10	0.00	179.05	179.05	502.46	46.5	53.5
#20	3.02	17.88	14.87	14.87	55.3	44.7
#40	3.11	16.68	13.56	28.43	63.4	36.6
#60	3.06	18.07	15.01	43.43	72.3	27.7
#100	2.99	14.19	11.20	54.64	78.9	21.1
#200	3.09	8.81	5.72	60.36	82.3	17.7

Data entered by: MLM
Data checked by: SLM
FileName: LKHYS22

Date: 09/17/2012
Date: 9/17/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-2

BORING NO. 211-A-002
DEPTH 23-26'
SAMPLE NO. 211A002GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 8/30/12 KD
DATE TESTED 9/13/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	23.3
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01312
Value of "alpha"	1.00	Wt. Dry Sample "W"	168.807
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	4.5		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	32.25	27.75	16.4	16.4	11.00	0.0435
2.0	30.00	25.50	15.1	15.1	11.37	0.0313
5.0	28.00	23.50	13.9	13.9	11.70	0.0201
15.0	25.25	20.75	12.3	12.3	12.15	0.0118
30.0	23.50	19.00	11.3	11.3	12.44	0.0084
60.0	22.00	17.50	10.4	10.4	12.68	0.0060
120.0	21.00	16.50	9.8	9.8	12.85	0.0043
250.0	20.25	15.75	9.3	9.3	12.97	0.0030
1440.0	19.00	14.50	8.6	8.6	13.17	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: SLU
FileName: LKHYN22

Date: 09/17/2012
Date: 9/17/12



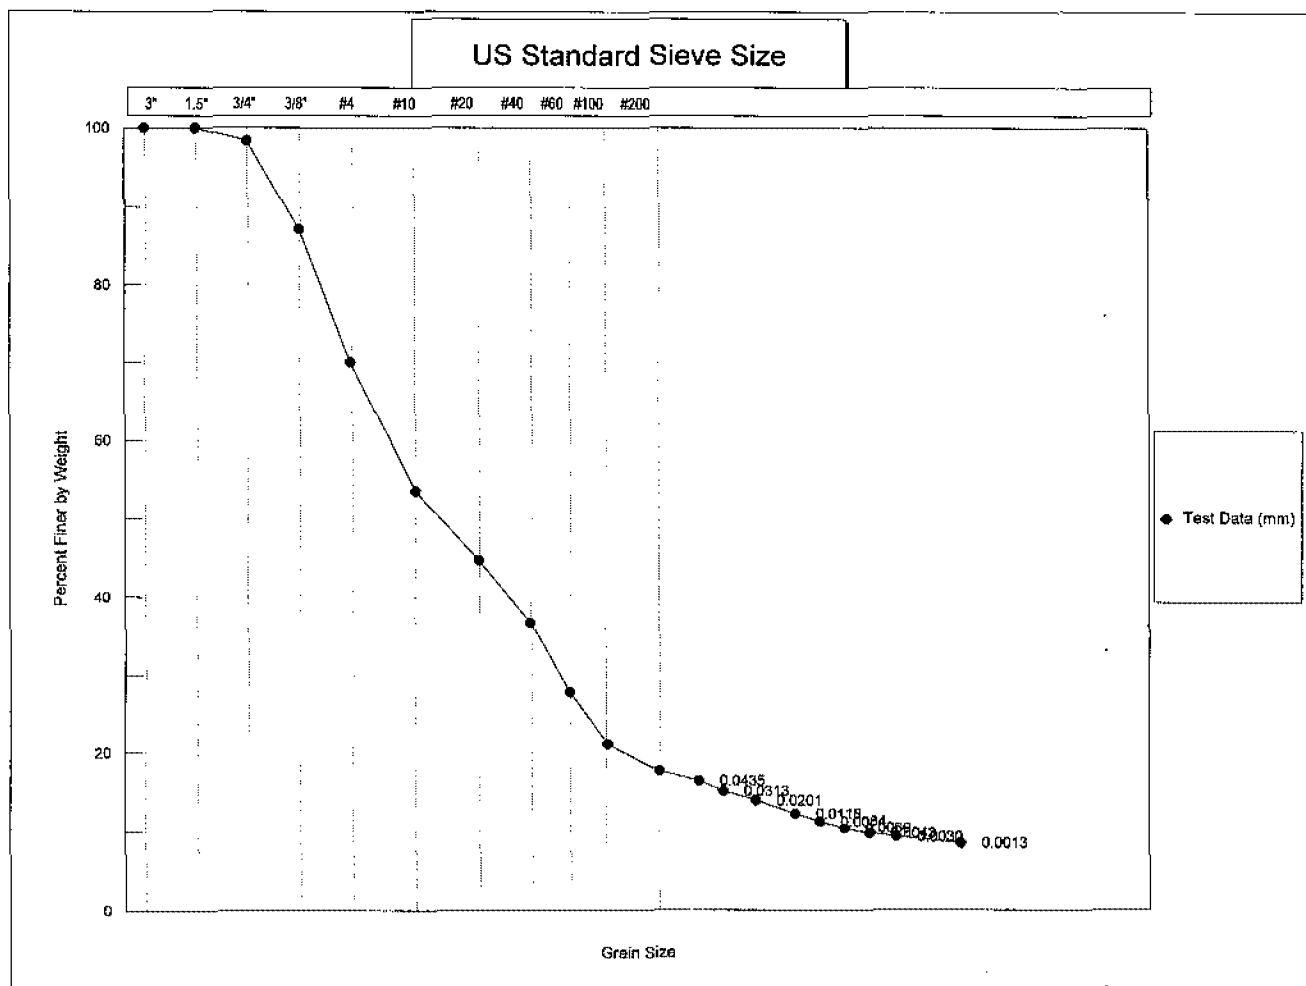

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL				SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky

Boring No.: 211-A-002

Sample No.: 211A002GRNSZ2

Job Number: 2855-2

Depth: 23-26'

Classification: **Classification Not Performed**

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-2

BORING NO. 211-A-002
DEPTH 37.4-39.0'
SAMPLE NO. 211A002GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 8/30/12 KD
DATE TESTED 9/13/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 37.39
Wt. Dry Soil & Pan (g) 36.68
Wt. Lost Moisture (g) 0.71
Wt. of Pan Only (g) 2.98
Wt. of Dry Soil (g) 33.70
Moisture Content % 2.1

Wt. Total Sample Wet (g) 842.64
Weight of + #10 Before Washing (g) 1.54
Weight of + #10 After Washing (g) 1.36
Weight of - #10 Wet (g) 841.10
Weight of - #10 Dry (g) 823.92
Wt. Total Sample Dry (g) 825.28

Wt. Hydrom. Sample Wet (g) 70.65
Wt. Hydrom. Sample Dry (g) 69.19

Calc. Wt. "W" (g) 69.31
Calc. Mass + #10 0.11

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	0.48	0.48	0.48	0.1	99.9
#10	0.00	0.88	0.88	1.36	0.2	99.8
#20	3.23	3.44	0.21	0.21	0.5	99.5
#40	3.12	4.35	1.22	1.43	2.2	97.8
#60	3.25	7.71	4.46	5.89	8.7	91.3
#100	3.05	8.12	5.07	10.96	16.0	84.0
#200	2.98	7.40	4.42	15.38	22.4	77.6

Data entered by: MLM
Data checked by: *SL*
FileName: LKHVNS23

Date: 09/17/2012
Date: 9/17/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-2

BORING NO. 211-A-002
DEPTH 37.4-39.0'
SAMPLE NO. 211A002GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 8/30/12 KD
DATE TESTED 9/13/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	23.4
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01311
Value of "alpha"	1.00	Wt. Dry Sample "W"	69.306
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	4.5		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	57.00	52.50	75.8	75.8	6.94	0.0345
2.0	53.00	48.50	70.0	70.0	7.60	0.0255
5.0	49.00	44.50	64.2	64.2	8.25	0.0168
15.0	44.00	39.50	57.0	57.0	9.07	0.0102
30.0	40.50	36.00	51.9	51.9	9.65	0.0074
60.0	37.00	32.50	46.9	46.9	10.22	0.0054
120.0	35.00	30.50	44.0	44.0	10.55	0.0039
250.0	32.50	28.00	40.4	40.4	10.96	0.0027
1440.0	27.50	23.00	33.2	33.2	11.78	0.0012

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: MLM
FileName: LKHYS23

Date: 09/17/2012
Date: 9/17/12



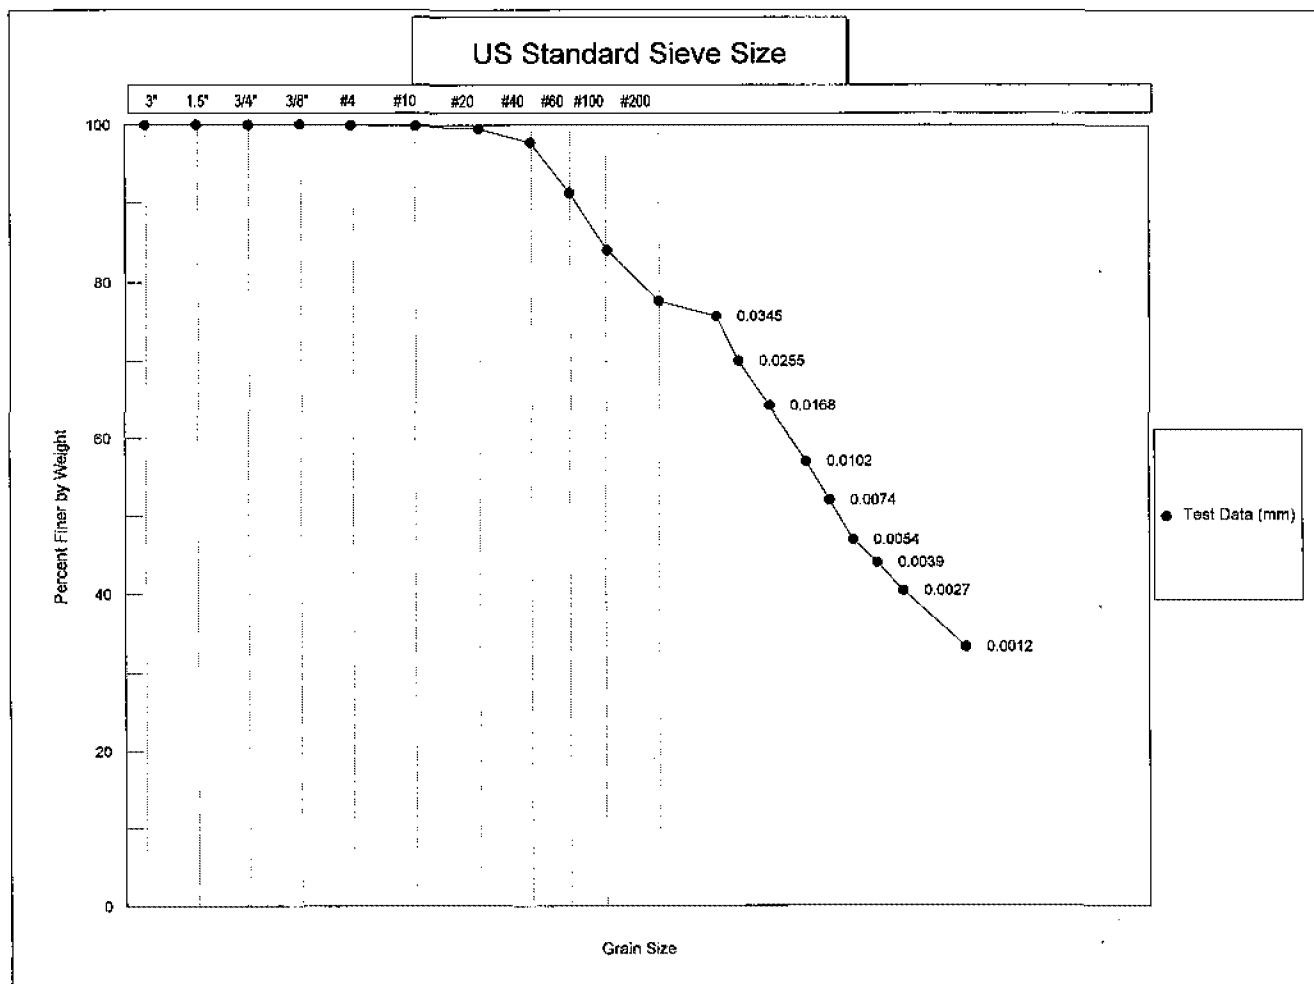

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)			
	COARSE	FINE	CRS	MEDIUM	FINE				
COBBLES	PEBBLE GRAVEL				SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky

Boring No.: 211-A-002

Sample No.: 211A002GRNSZ3

Job Number: 2855-2

Depth: 37.4-39.0'

Classification:

Classification Not Performed

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-012
DEPTH 12-15'
SAMPLE NO. 211A012GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/17/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 43.29
Wt. Dry Soil & Pan (g) 42.55
Wt. Lost Moisture (g) 0.74
Wt. of Pan Only (g) 3.03
Wt. of Dry Soil (g) 39.52
Moisture Content % 1.9

Wt. Total Sample Wet (g) 1107.23
Weight of + #10 Before Washing (g) 4.40
Weight of + #10 After Washing (g) 4.22
Weight of - #10 Wet (g) 1102.83
Weight of - #10 Dry (g) 1082.74
Wt. Total Sample Dry (g) 1086.96

Wt. Hydrom. Sample Wet (g) 66.99
Wt. Hydrom. Sample Dry (g) 65.76

Calc. Wt. "W" (g) 66.02
Calc. Mass + #10 0.26

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	2.96	2.96	2.96	0.3	99.7
#4	0.00	0.93	0.93	3.89	0.4	99.6
#10	0.00	0.33	0.33	4.22	0.4	99.6
#20	1.78	1.83	0.05	0.05	0.5	99.5
#40	1.79	2.14	0.35	0.40	1.0	99.0
#60	1.77	3.04	1.27	1.67	2.9	97.1
#100	1.80	3.62	1.82	3.49	5.7	94.3
#200	1.77	3.10	1.33	4.82	7.7	92.3

Data entered by: DAW
Data checked by: DAW
FileName: LKH01215

Date: 10/04/2012
Date: 10/4/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-012
DEPTH 12-15'
SAMPLE NO. 211A012GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/17/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	23.2
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01314
Value of "alpha"	1.00	Wt. Dry Sample "W"	66.016
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Reading		100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
	Original	Corrected "R"				
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	48.00	43.00	65.1	65.1	8.42	0.0381
2.0	45.00	40.00	60.6	60.6	8.91	0.0277
5.0	38.00	33.00	50.0	50.0	10.06	0.0186
15.0	29.00	24.00	36.4	36.4	11.53	0.0115
30.0	24.00	19.00	28.8	28.8	12.35	0.0084
60.0	21.00	16.00	24.2	24.2	12.85	0.0061
120.0	19.75	14.75	22.3	22.3	13.05	0.0043
250.0	18.25	13.25	20.1	20.1	13.30	0.0030
1440.0	17.00	12.00	18.2	18.2	13.50	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: DAW
Data checked by: DAW
FileName: LKH01215

Date: 10/04/2012
Date: 10/4/12



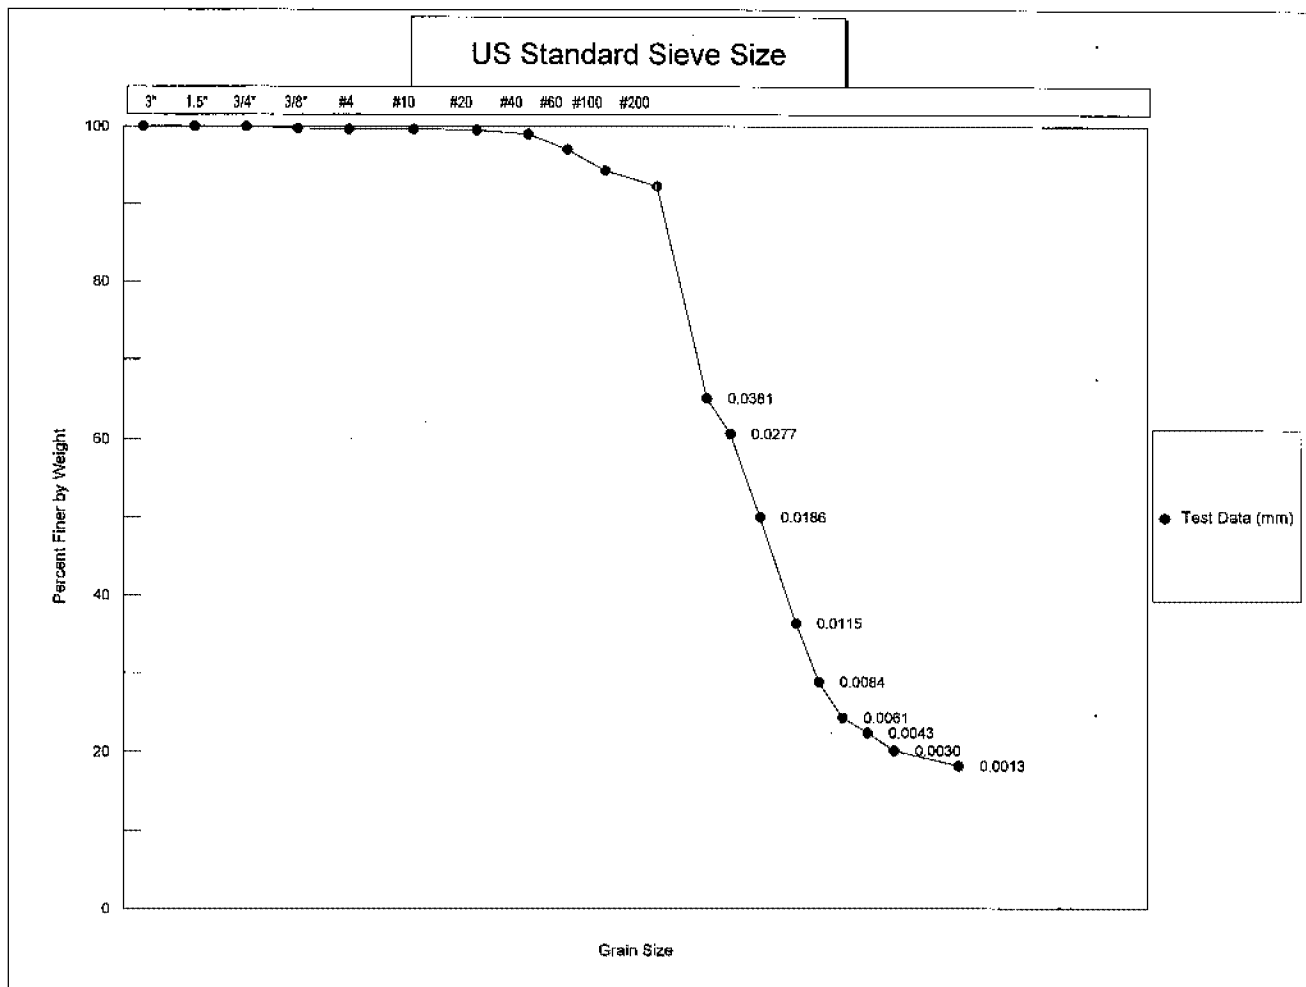

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky Boring No.: 211-A-012
 Job Number: 2855-03 Depth: 12-15'
 Classification: **Classification Not Performed**

Sample No.: 211A012GRNSZ1

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-012
DEPTH 20-23'
SAMPLE NO. 211A012 GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/17/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 35.67
Wt. Dry Soil & Pan (g) 34.93
Wt. Lost Moisture (g) 0.74
Wt. of Pan Only (g) 3.08
Wt. of Dry Soil (g) 31.85
Moisture Content % 2.3

Wt. Total Sample Wet (g) 1023.88
Weight of + #10 Before Washing (g) 122.94
Weight of + #10 After Washing (g) 85.39
Weight of - #10 Wet (g) 900.94
Weight of - #10 Dry (g) 917.18
Wt. Total Sample Dry (g) 1002.57
Calc. Wt. "W" (g) 76.75
Calc. Mass + #10 6.54

Wt. Hydrom. Sample Wet (g) 71.84
Wt. Hydrom. Sample Dry (g) 70.21

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	20.30	20.30	20.30	2.0	98.0
#4	0.00	38.42	38.42	58.72	5.9	94.1
#10	0.00	26.67	26.67	85.39	8.5	91.5
#20	1.78	3.64	1.86	1.86	10.9	89.1
#40	1.75	6.01	4.26	6.12	16.5	83.5
#60	1.76	11.75	9.99	16.11	29.5	70.5
#100	1.78	8.69	6.91	23.02	38.5	61.5
#200	1.78	4.95	3.17	26.19	42.6	57.4

Data entered by: DAW
Data checked by: slh
FileName: LKH02023

Date: 10/04/2012
Date: 10/4/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-012
DEPTH 20-23'
SAMPLE NO. 211A012 GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/17/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer # ASTM 152 H
Sp. Gr. of Soil 2.65
Value of "alpha" 1.00
Deflocculant Sodium Hexametaphosphate
Defloc. Corr'n 5.0
Meniscus Corr'n 0.0

Temp., Deg. C 23.2
Temp. Coef. K 0.01314
Wt. Dry Sample "W" 76.747
% of Total Sample 100.0


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	46.00	41.00	53.4	53.4	8.75	0.0389
2.0	43.00	38.00	49.5	49.5	9.24	0.0282
5.0	38.00	33.00	43.0	43.0	10.06	0.0186
15.0	32.75	27.75	36.2	36.2	10.92	0.0112
30.0	30.00	25.00	32.6	32.6	11.37	0.0081
60.0	28.25	23.25	30.3	30.3	11.66	0.0058
120.0	27.00	22.00	28.7	28.7	11.86	0.0041
250.0	26.00	21.00	27.4	27.4	12.03	0.0029
1440.0	24.50	19.50	25.4	25.4	12.27	0.0012

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: DAW
Data checked by: DAW
FileName: LKH02023

Date: 10/04/2012
Date: 10/4/12



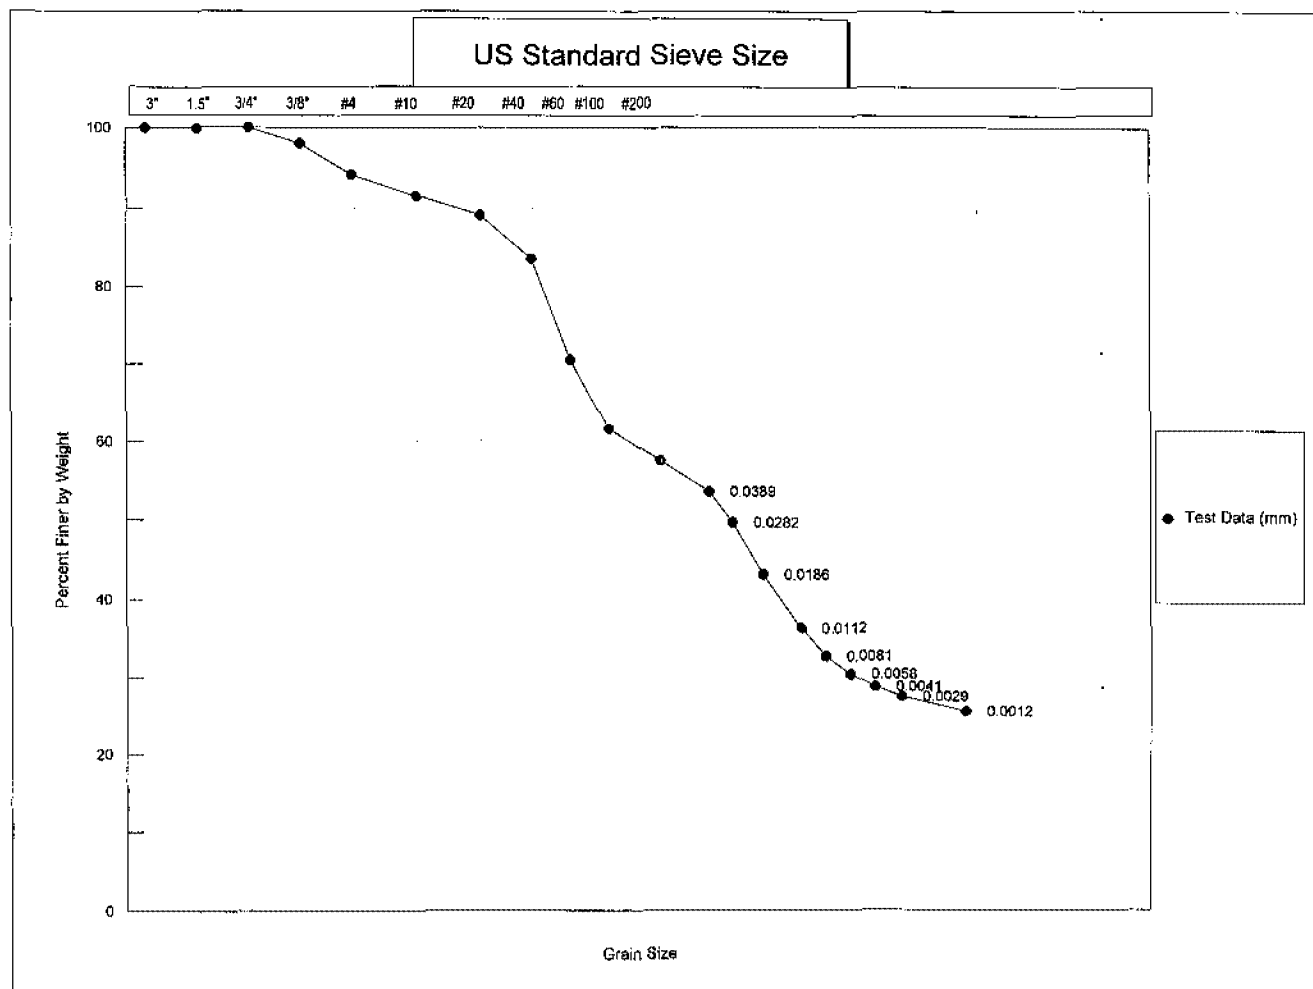

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky Boring No.: 211-A-012
 Job Number: 2855-03 Depth: 20-23'
 Classification: **Classification Not Performed**

Sample No.: 211A012 GRNSZ2

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-012
DEPTH 40-42'
SAMPLE NO. 211A012GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/17/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 35.86
Wt. Dry Soil & Pan (g) 35.35
Wt. Lost Moisture (g) 0.51
Wt. of Pan Only (g) 3.06
Wt. of Dry Soil (g) 32.29
Moisture Content % 1.6

Wt. Total Sample
Wet (g) 1243.67
Weight of + #10
Before Washing (g) 7.17
Weight of + #10
After Washing (g) 6.35
Weight of - #10
Wet (g) 1236.50
Weight of - #10
Dry (g) 1218.08
Wt. Total Sample
Dry (g) 1224.43

Wt. Hydrom. Sample Wet (g) 71.16
Wt. Hydrom. Sample Dry (g) 70.06

Calc. Wt. "W" (g) 70.42
Calc. Mass + #10 0.37

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	1.76	1.76	1.76	0.1	99.9
#10	0.00	4.59	4.59	6.35	0.5	99.5
#20	1.78	2.84	1.06	1.06	2.0	98.0
#40	1.78	5.92	4.14	5.20	7.9	92.1
#60	1.78	9.68	7.90	13.10	19.1	80.9
#100	1.79	11.09	9.30	22.40	32.3	67.7
#200	1.78	10.51	8.73	31.13	44.7	55.3

Data entered by: DAW
Data checked by: SM
FileName: LKH04042

Date: 10/04/2012
Date: 10/11/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-012
DEPTH 40-42'
SAMPLE NO. 211A012GRNSZ3
SOIL DESCR. ER112-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/17/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	23.2
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01314
Value of "alpha"	1.00	Wt. Dry Sample "W"	70.422
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Reading		100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
	Original	Corrected "R"				
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	39.00	34.00	48.3	48.3	9.89	0.0413
2.0	36.50	31.50	44.7	44.7	10.30	0.0298
5.0	33.75	28.75	40.8	40.8	10.76	0.0193
15.0	29.00	24.00	34.1	34.1	11.53	0.0115
30.0	26.00	21.00	29.8	29.8	12.03	0.0083
60.0	23.00	18.00	25.6	25.6	12.52	0.0060
120.0	21.00	16.00	22.7	22.7	12.85	0.0043
250.0	19.00	14.00	19.9	19.9	13.17	0.0030
1440.0	17.25	12.25	17.4	17.4	13.46	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: DAW
Data checked by: DAW
FileName: LKH04042

Date: 10/04/2012
Date: 10/4/12



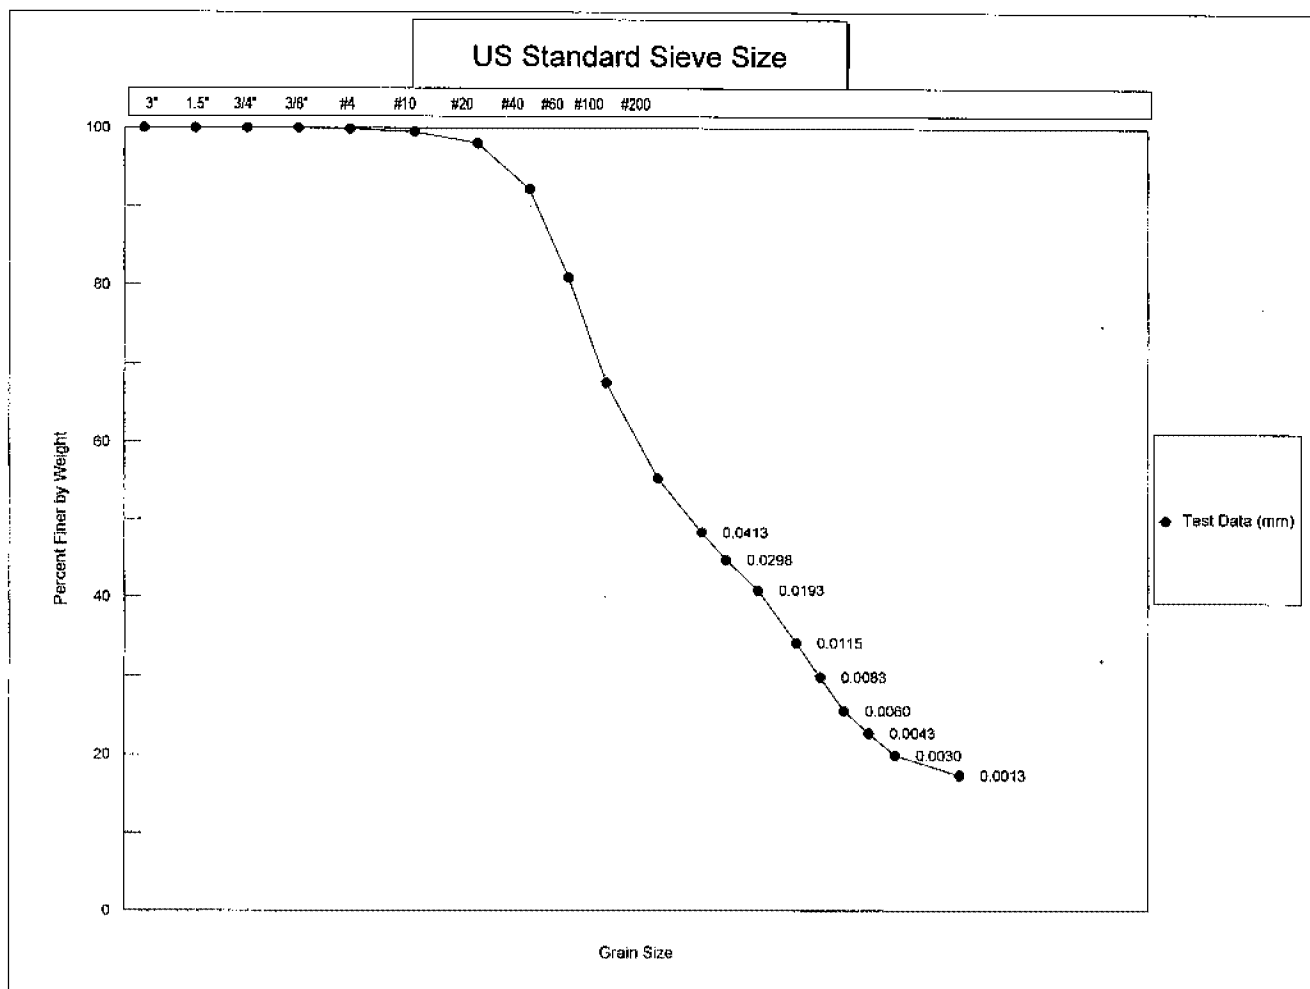

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)
	COARSE	FINE	CRS	MEDIUM	FINE	

USCS

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

WENTWORTH

Client: LATA Kentucky

Boring No.: 211-A-012

Sample No.: 211A012GRNSZ3

Job Number: 2855-03

Depth: 40-42'

Classification:

Classification Not Performed

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-027
DEPTH 12-15'
SAMPLE NO. 211A027GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/18/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 32.07
Wt. Dry Soil & Pan (g) 31.27
Wt. Lost Moisture (g) 0.80
Wt. of Pan Only (g) 3.09
Wt. of Dry Soil (g) 28.18
Moisture Content % 2.8

Wt. Total Sample
Wet (g) 1074.24
Weight of + #10
Before Washing (g) 0.34
Weight of + #10
After Washing (g) 0.29
Weight of - #10
Wet (g) 1073.90
Weight of - #10
Dry (g) 1044.30
Wt. Total Sample
Dry (g) 1044.59

Wt. Hydrom. Sample Wet (g) 66.90
Wt. Hydrom. Sample Dry (g) 65.05

Calc. Wt. "W" (g) 65.07
Calc. Mass + #10 0.02

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	0.00	0.00	0.00	0.0	100.0
#10	0.00	0.29	0.29	0.29	0.0	100.0
#20	3.01	3.09	0.08	0.08	0.1	99.9
#40	3.19	3.66	0.47	0.55	0.9	99.1
#60	3.05	5.41	2.36	2.91	4.5	95.5
#100	3.08	7.07	3.99	6.90	10.6	89.4
#200	3.07	5.54	2.47	9.37	14.4	85.6

Data entered by: slu DAW
Data checked by: slu
FileName: LKHU1215

Date: 10/05/2012
Date: 10/5/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-027
DEPTH 12-15'
SAMPLE NO. 211A027GRNSZ1
SOIL DESCR. ER12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/18/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	23.3
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01312
Value of "alpha"	1.00	Wt. Dry Sample "W"	65.069
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Reading Original	Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	53.00	48.00	73.8	73.8	7.60	0.0362
2.0	47.50	42.50	65.3	65.3	8.50	0.0271
5.0	38.25	33.25	51.1	51.1	10.02	0.0186
15.0	29.00	24.00	36.9	36.9	11.53	0.0115
30.0	24.25	19.25	29.6	29.6	12.31	0.0084
60.0	22.50	17.50	26.9	26.9	12.60	0.0060
120.0	21.00	16.00	24.6	24.6	12.85	0.0043
250.0	19.00	14.00	21.5	21.5	13.17	0.0030
1440.0	18.00	13.00	20.0	20.0	13.34	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: DAW
Data checked by: AW
FileName: LKHU1215

Date: 10/05/2012
Date: 10/5/12



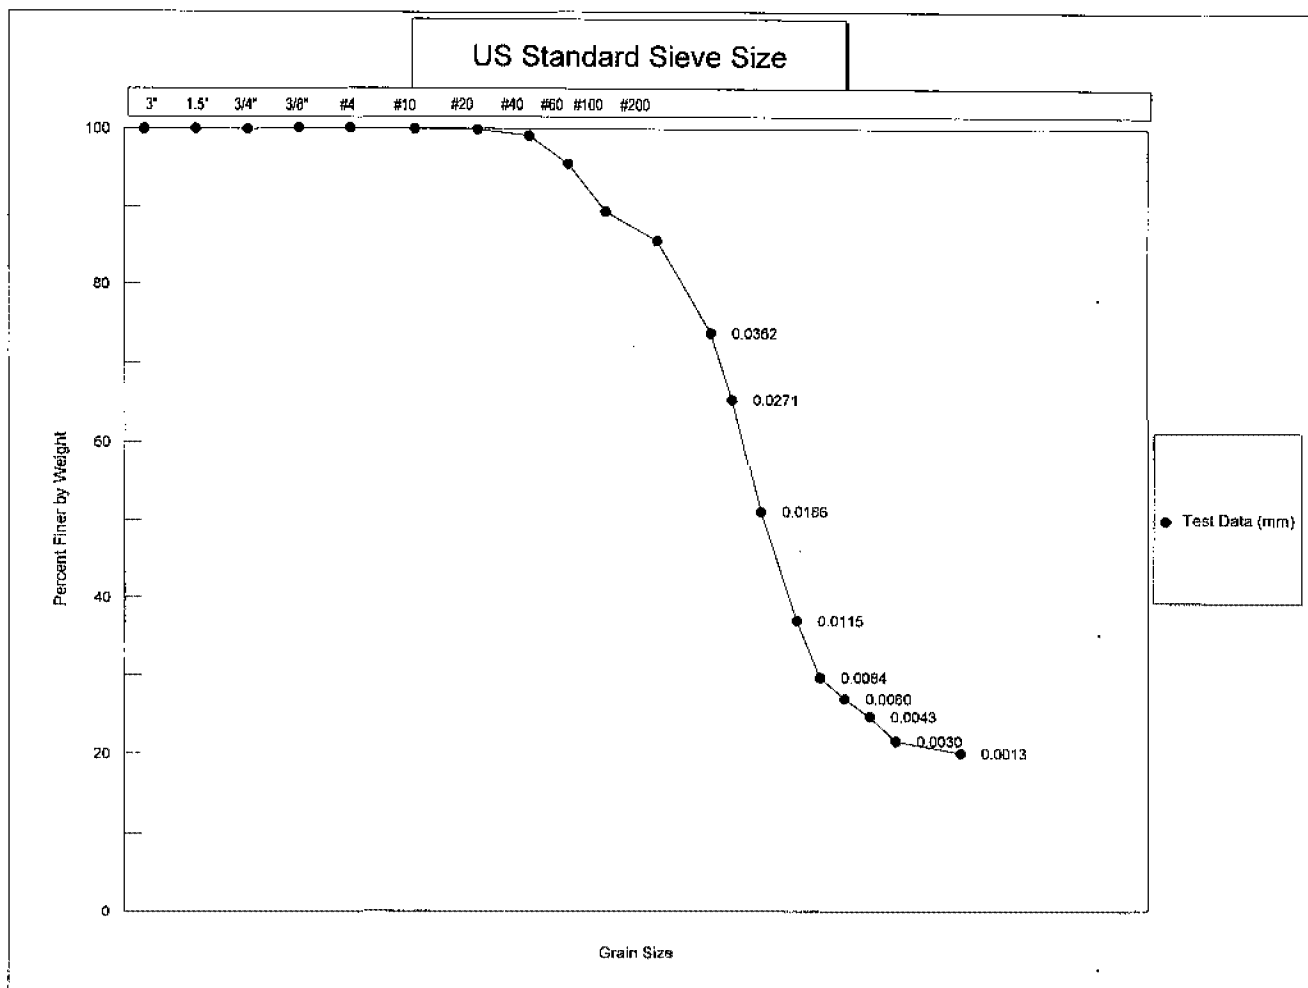

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL				SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky Boring No.: 211-A-027
 Job Number: 2855-03 Depth: 12-15'
 Classification: **Classification Not Performed**

Sample No.: 211A027GRNSZ1

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-027
DEPTH 22-25'
SAMPLE NO. 211A027GRNZ2
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/18/12 JS
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 33.43
Wt. Dry Soil & Pan (g) 32.67
Wt. Lost Moisture (g) 0.76
Wt. of Pan Only (g) 3.07
Wt. of Dry Soil (g) 29.60
Moisture Content % 2.6

Wt. Total Sample Wet (g) 745.33
Weight of + #10 Before Washing (g) 208.89
Weight of + #10 After Washing (g) 169.94
Weight of - #10 Wet (g) 536.44
Weight of - #10 Dry (g) 560.99
Wt. Total Sample Dry (g) 730.93
Calc. Wt. "W" (g) 110.41
Calc. Mass + #10 25.67

Wt. Hydrom. Sample Wet (g) 86.92
Wt. Hydrom. Sample Dry (g) 84.74

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	22.89	22.89	22.89	3.1	96.9
3/8"	0.00	48.61	48.61	71.50	9.8	90.2
#4	0.00	53.80	53.80	125.30	17.1	82.9
#10	0.00	44.64	44.64	169.94	23.2	76.8
#20	3.01	7.83	4.82	4.82	27.6	72.4
#40	3.12	12.75	9.64	14.45	36.3	63.7
#60	3.12	15.51	12.40	26.85	47.6	52.4
#100	3.05	12.36	9.31	36.16	56.0	44.0
#200	3.02	6.57	3.55	39.70	59.2	40.8

Data entered by: DAW
Data checked by: DAW
FileName: LKHU2225

Date: 10/05/2012
Date: 10/5/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-027
DEPTH 22-25'
SAMPLE NO. 211A027GRNZ2
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/18/12 JS
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	23.4
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01311
Value of "alpha"	1.00	Wt. Dry Sample "W"	110.414
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Reading		100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
	Original	Corrected "R"				
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	49.00	44.00	39.8	39.8	8.25	0.0377
2.0	44.00	39.00	35.3	35.3	9.07	0.0279
5.0	39.00	34.00	30.8	30.8	9.89	0.0184
15.0	34.50	29.50	26.7	26.7	10.63	0.0110
30.0	31.75	26.75	24.2	24.2	11.08	0.0080
60.0	30.25	25.25	22.9	22.9	11.33	0.0057
120.0	29.25	24.25	22.0	22.0	11.49	0.0041
250.0	28.00	23.00	20.8	20.8	11.70	0.0028
1440.0	27.00	22.00	19.9	19.9	11.86	0.0012

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: DAW
Data checked by: SKL
FileName: LKHU2225

Date: 10/05/2012
Date: 10/5/12



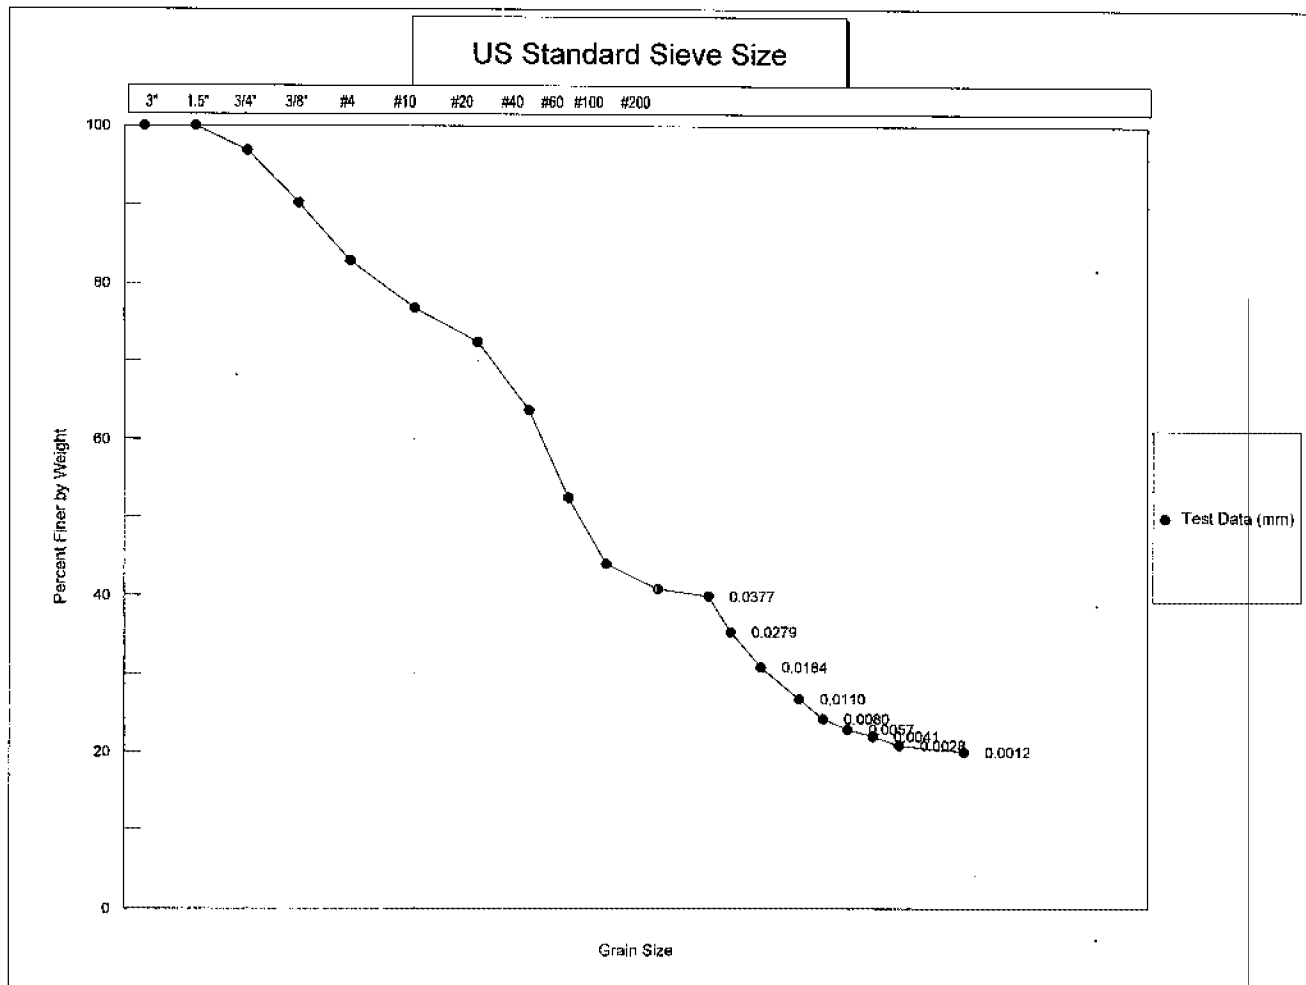

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky
 Job Number: 2855-03
 Classification:

Boring No.: 211-A-027
 Depth: 22-25'

Classification Not Performed

Sample No.: 211A027GRNZ2

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-027
DEPTH 35.5-37'
SAMPLE NO. 211A027GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/18/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No


Wt. Wet Soil & Pan (g) 34.83
Wt. Dry Soil & Pan (g) 34.66
Wt. Lost Moisture (g) 0.17
Wt. of Pan Only (g) 3.06
Wt. of Dry Soil (g) 31.60
Moisture Content % 0.5

Wt. Total Sample
Wet (g) 1121.88
Weight of + #10
Before Washing (g) 491.75
Weight of + #10
After Washing (g) 462.56
Weight of - #10
Wet (g) 630.13
Weight of - #10
Dry (g) 655.79
Wt. Total Sample
Dry (g) 1118.35

Calc. Wt. "W" (g) 151.72
Calc. Mass + #10 62.75

Wt. Hydrom. Sample Wet (g) 89.44
Wt. Hydrom. Sample Dry (g) 88.96

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	11.05	11.05	11.05	1.0	99.0
3/8"	0.00	177.82	177.82	188.87	16.9	83.1
#4	0.00	157.69	157.69	346.56	31.0	69.0
#10	0.00	116.00	116.00	462.56	41.4	58.6
#20	3.11	13.47	10.36	10.36	48.2	51.8
#40	2.96	22.16	19.20	29.56	60.8	39.2
#60	3.03	27.11	24.07	53.63	76.7	23.3
#100	2.99	17.11	14.11	67.75	86.0	14.0
#200	3.07	8.03	4.96	72.71	89.3	10.7

Data entered by: DAW
Data checked by: 
FileName: LKHU3537

Date: 10/05/2012
Date: 10/5/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-03

BORING NO. 211-A-027
DEPTH 35.5-37'
SAMPLE NO. 211A027GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211A
LOCATION SW Plume RDSI Geotechnical

SAMPLED 09/18/12 KD
DATE TESTED 10/02/12 JS
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	23.1
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01315
Value of "alpha"	1.00	Wt. Dry Sample "W"	151.715
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	0.0		
Meniscus Corr'n	5.0		


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	20.00	25.00	16.5	16.5	13.01	0.0474
2.0	18.00	23.00	15.2	15.2	13.34	0.0340
5.0	17.00	22.00	14.5	14.5	13.50	0.0216
15.0	16.00	21.00	13.8	13.8	13.67	0.0126
30.0	14.50	19.50	12.9	12.9	13.91	0.0090
60.0	14.00	19.00	12.5	12.5	13.99	0.0064
120.0	14.00	19.00	12.5	12.5	13.99	0.0045
250.0	13.50	18.50	12.2	12.2	14.08	0.0031
1440.0	13.50	18.50	12.2	12.2	14.08	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: SLH DAW
Data checked by: SLH
FileName: LKHU3537

Date: 10/05/2012
Date: 10/5/12



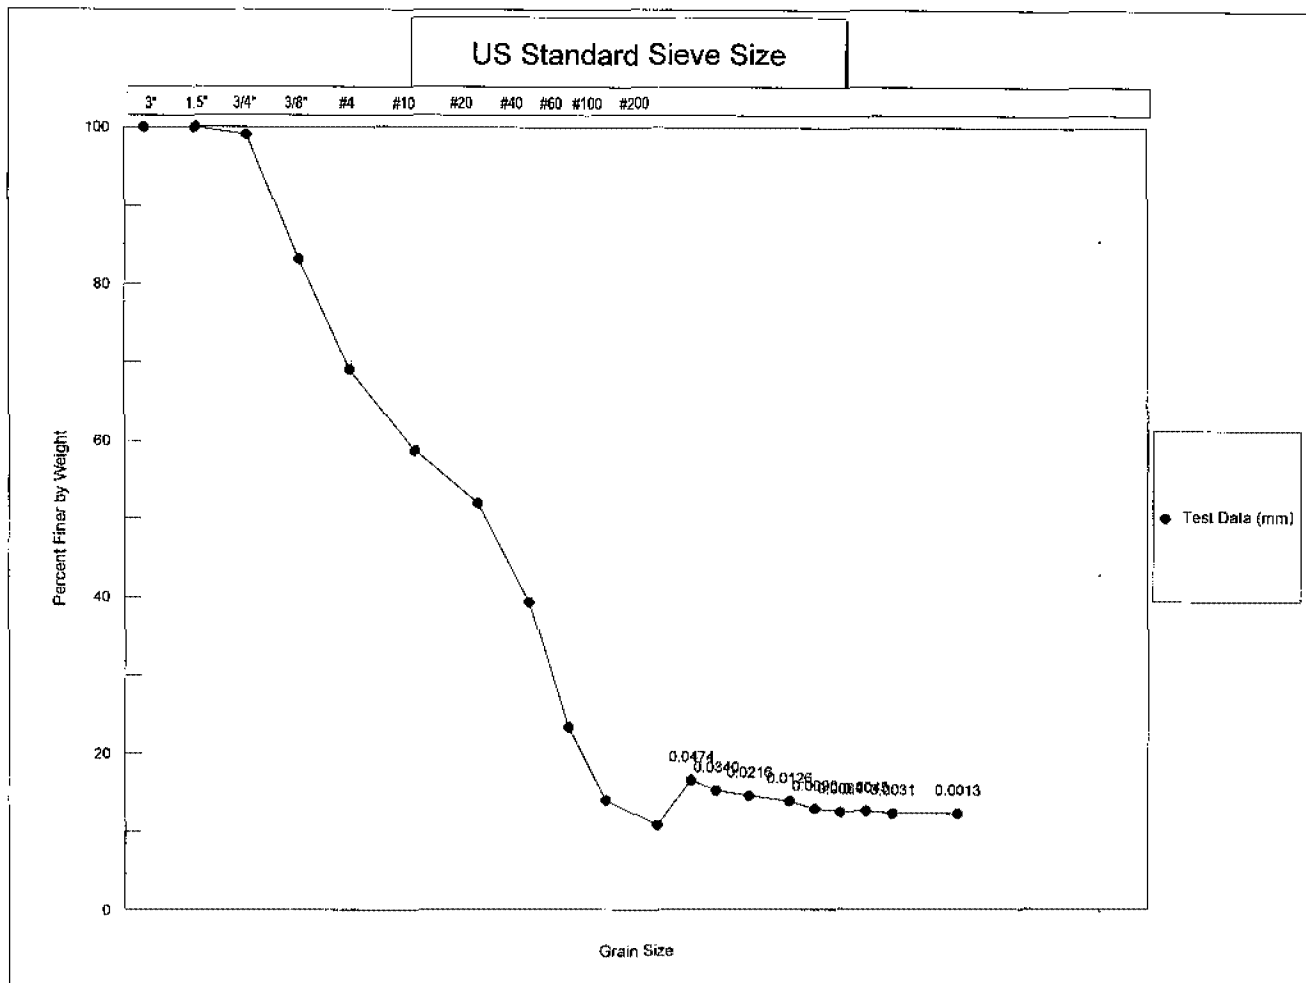

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky Boring No.: 211-A-027
 Job Number: 2855-03 Depth: 35.5-37'
 Classification: **Classification Not Performed**

Sample No.: 211A027GRNSZ3

Permeability Tests

ASTM D5084-10

Advanced Terra Testing

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT	LATA Environmental Services-Ky	JOB NO.	2855-04
BORING NO.	211-A-027	SAMPLED	9/18/12 KD
DEPTH	38-40'	TEST STARTED	10/12/12 CAL
SAMPLE NO.	211A027PERM3	TEST FINISHED	10/23/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	CELL NUMBER	14S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	5046	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	213.6	209.4	
Wt. Wet Soil & Pan (g)	220.3	216.1	
Wt. Dry Soil & Pan (g)	186.4	186.4	
Wt. Lost Moisture (g)	33.8	29.7	
Wt. of Pan Only (g)	6.7	6.7	
Wt. of Dry Soil (g)	179.8	179.8	
Moisture Content %	18.8	16.5	
Wet Density PCF	133.0	134.9	
Dry Density PCF	111.9	115.8	
Init. Diameter (in)	1.611	(cm)	4.092
Init. Area (sq in)	2.038	(sq cm)	13.152
Init. Height (in)	3.002	(cm)	7.625
Vol. Bef. Consol. (cu ft)	0.00354		
Vol. After Consol. (cu ft)	0.00342		
Porosity %	30.60		

FLOW PUMP CALCULATIONS

Pump Setting	5
Velocity CM/Sec	3.29E-05
Q (cc/s)	1.05E-06
Height	2.962
Diameter	1.595
Pressure (psi)	1.949
Area after consol. (cm*cm)	12.883
Gradient	18.214
Permeability k (cm/s)	4.5E-09
Permeability k (m/s)	4.5E-11
Back Pressure (psi)	98.0
Cell Pressure (psi)	133.0
Ave. Effective Stress (psi)	34.026
Average temperature degree C:	22.7

Data entry by: MLM Date: 10/24/2012
 Checked by: CM Date: 10/24/2012
 FileName: LKP00273



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services-Ky	JOB NO.	2855-04
BORING NO.	211-A-027	SAMPLED	9/18/12 KD
DEPTH	38-40'	TEST STARTED	10/12/12 CAL
SAMPLE NO.	211A027PERM3	TEST FINISHED	10/23/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	SETUP NO.	14S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	5046	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)		Pore Pressure (PSI)		Change	B
		Close	Open	Close	Open		
40.0	38.0	1.4	6.3				
50.0	48.0	7.8	8.6	38.5	47.5	9.0	0.90
60.0	58.0	9.3	10.0	48.4	57.3	8.9	0.89
70.0	68.0	9.9	10.7	58.7	67.6	8.9	0.89
80.0	78.0	11.0	11.7	69.0	77.8	8.8	0.88
90.0	88.0	11.9	12.6	78.9	88.3	9.4	0.94
100.0	98.0	12.8		88.8	98.1	9.3	0.93
110.0		14.0	14.1	98.4	107.9	9.5	0.95


CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.80	0.00
0.25	0.50	3.05	-2.25
0.5	0.71	3.10	-2.30
1	1.00	3.15	-2.35
2	1.41	3.25	-2.45
4	2.00	3.40	-2.60
9	3.00	3.70	-2.90
16	4.00	3.95	-3.15
30	5.48	4.40	-3.60
60	7.75	5.00	-4.20
120	10.95	5.80	-5.00
240	15.49	6.70	-5.90
360	18.97	7.40	-6.60

Initial Height (in)	3.002	Init. Vol. (CC)	100.29
Height Change (in)	0.040	Vol. Change (CC)	20.90
Ht. After Cons. (in)	2.962	Cell Exp. (CC)	17.55
Initial Area (sq in)	2.038	Net Change (CC)	3.35
Area After Cons. (sq in)	1.997	Cons. Vol. (CC)	96.94


Data entry by: MLM Date: 10/24/2012
 Checked by: CM Date: 10/24/2012
 FileName: LKP00273



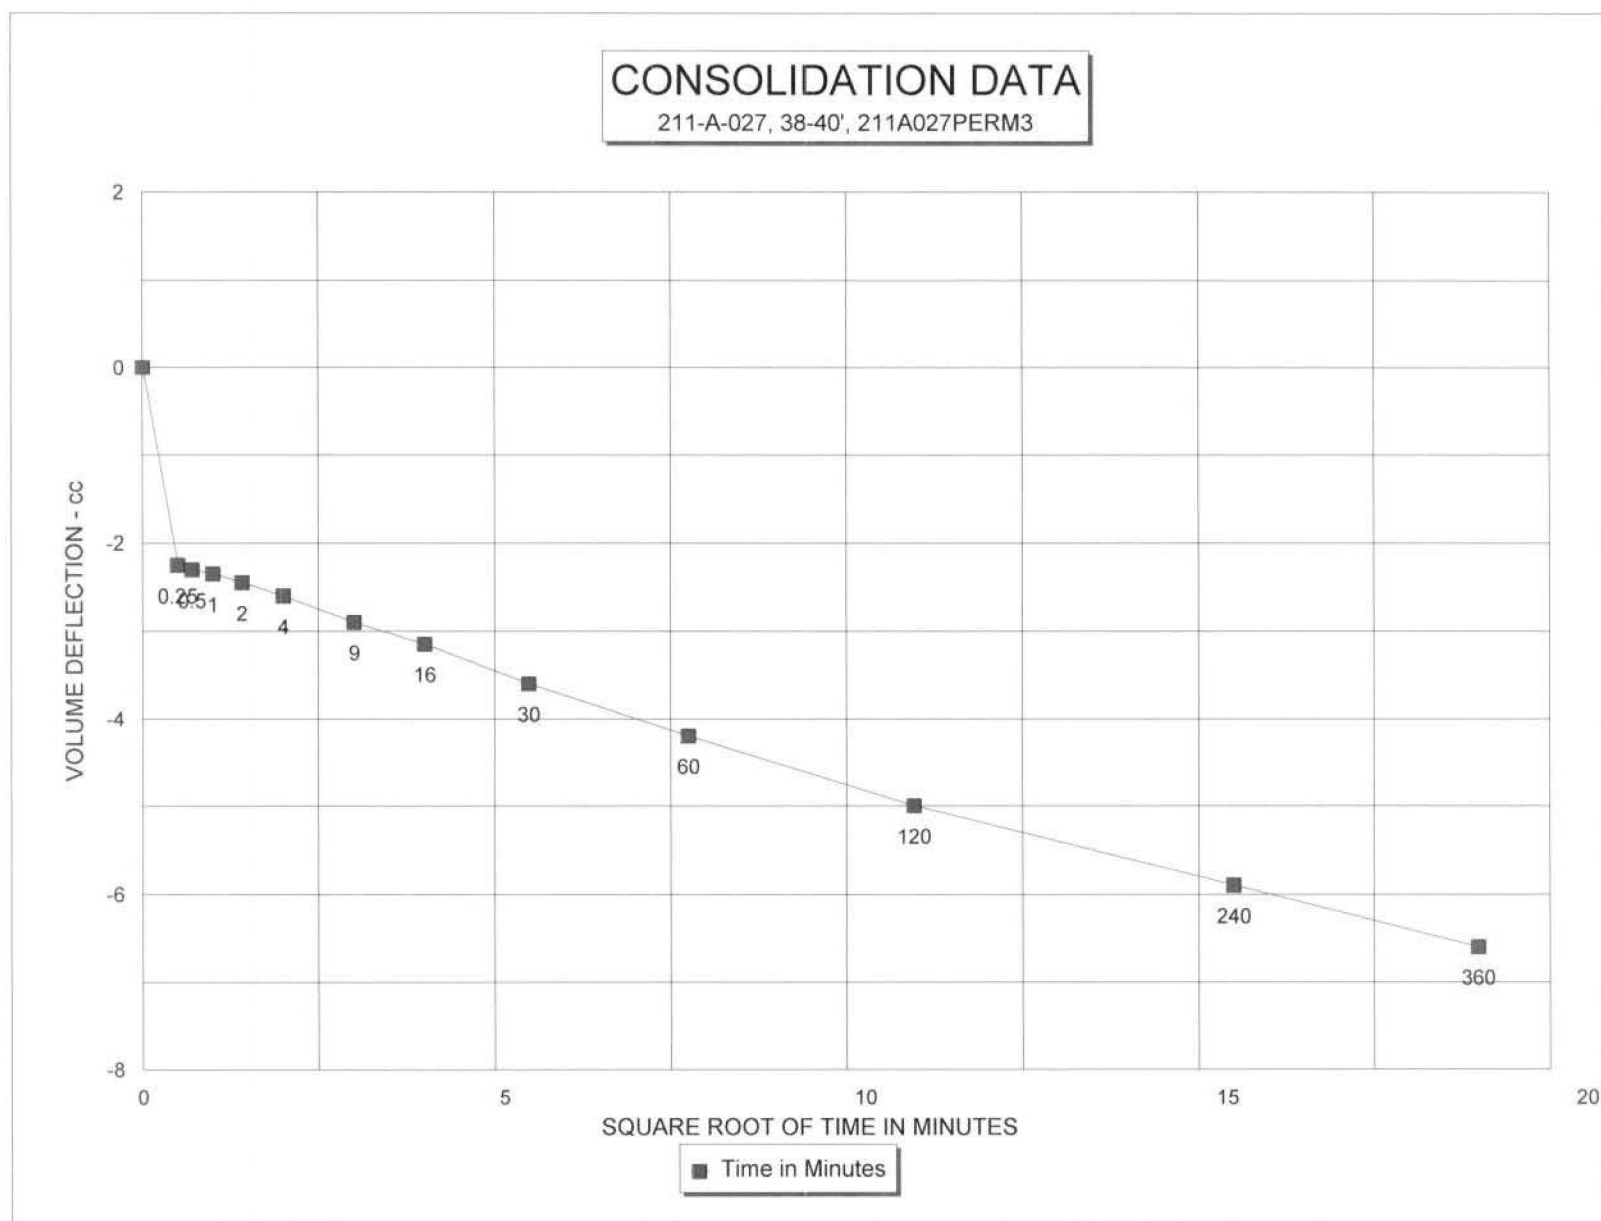

Preliminary Flow Pump Data

LATA-KY, SW Plume RDSI Geotechnical, 211A027PERM3

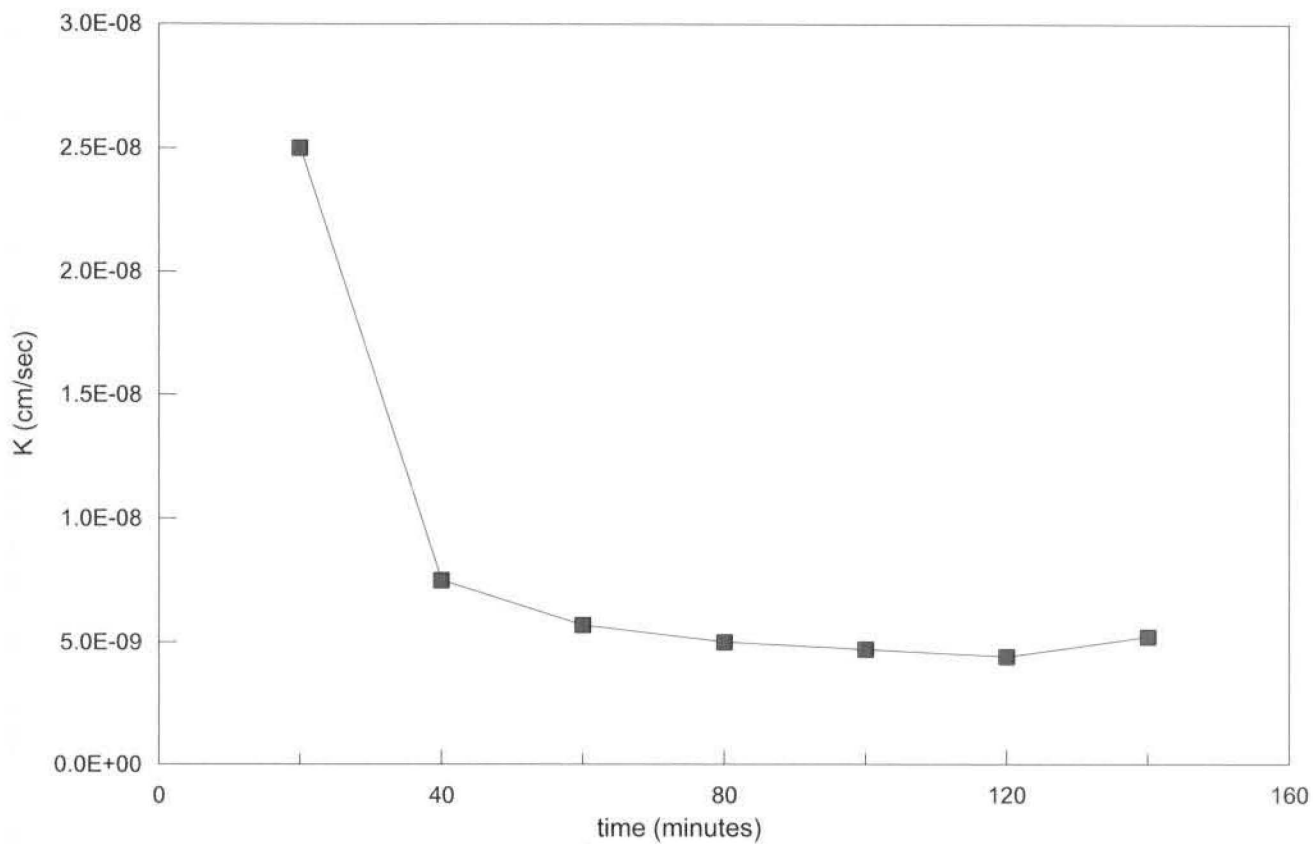


Average last 4 values
4.8E-09

Data Entered By:
Data Checked By:
File Name:

CAL
ym
LKFP0273

Date: 10/23/2012
Date Checked 10/24/12



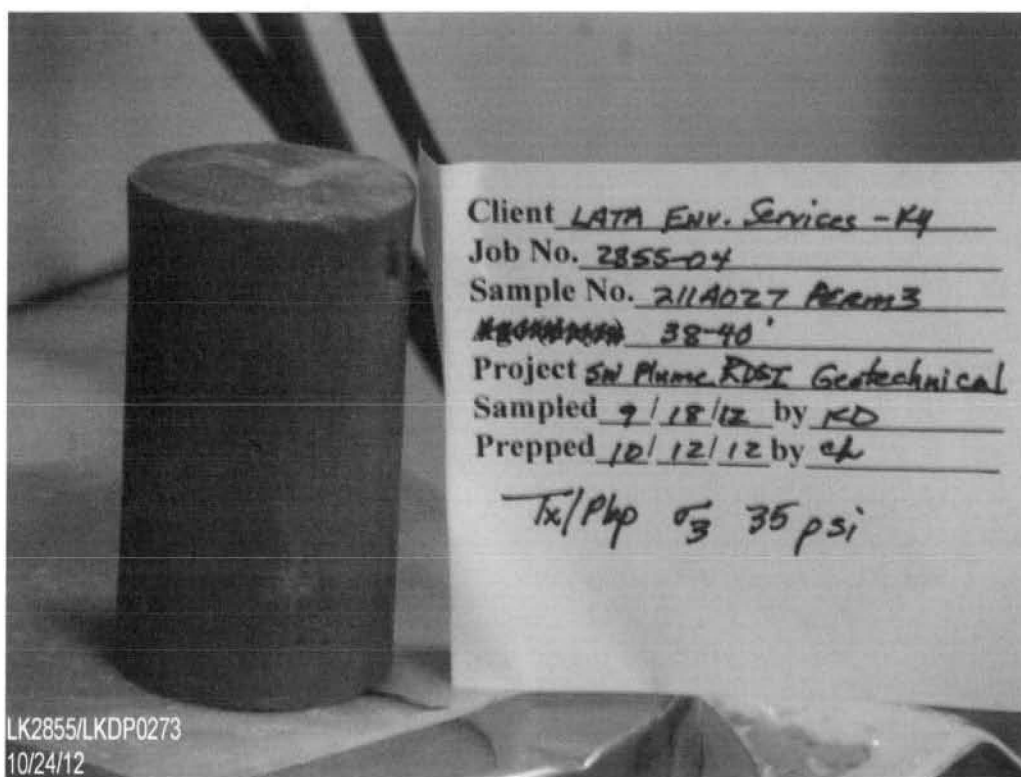

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT	LATA Environmental Services-Ky	JOB NO.	2855-04
BORING NO.	211-A-012	SAMPLED	9/17/12
DEPTH	10-12'	TEST STARTED	10/4/12 CAL
SAMPLE NO.	211A012PERM1	TEST FINISHED	10/6/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	CELL NUMBER	13S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	1423	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	202.0	196.9	
Wt. Wet Soil & Pan (g)	208.6	203.5	
Wt. Dry Soil & Pan (g)	169.4	169.4	
Wt. Lost Moisture (g)	39.2	34.1	
Wt. of Pan Only (g)	6.6	6.6	
Wt. of Dry Soil (g)	162.8	162.8	
Moisture Content %	24.1	20.9	
Wet Density PCF	126.0	132.3	
Dry Density PCF	101.5	109.4	
Init. Diameter (in)	1.618	(cm)	4.110
Init. Area (sq in)	2.056	(sq cm)	13.266
Init. Height (in)	2.971	(cm)	7.546
Vol. Bef. Consol. (cu ft)	0.00354		
Vol. After Consol. (cu ft)	0.00328		
Porosity %	36.68		

FLOW PUMP CALCULATIONS

Pump Setting	15
Velocity CM/Sec	9.85E-05
Q (cc/s)	3.15E-06
Height	2.950
Diameter	1.564
Pressure (psi)	2.180
Area after consol. (cm*cm)	12.399
Gradient	20.455
Permeability k (cm/s)	1.2E-08
Permeability k (m/s)	1.2E-10
Back Pressure (psi)	38.0
Cell Pressure (psi)	47.9
Ave. Effective Stress (psi)	8.810
Average temperature degree C:	21.8

Data entry by: MLM Date: 10/08/2012
 Checked by: GTC Date: 10/08/12
 FileName: LKP0A121



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services-Ky	JOB NO.	2855-04
BORING NO.	211-A-012	SAMPLED	9/17/12
DEPTH	10-12'	TEST STARTED	10/4/12 CAL
SAMPLE NO.	211A012PERM1	TEST FINISHED	10/6/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	SETUP NO.	13S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	1423	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	1.8	7.2		
50.0		12.0	12.2	39.0	48.5
				9.5	0.95

CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	12.20	0.00
0.25	0.50	12.85	-0.65
0.5	0.71	12.85	-0.65
1	1.00	12.90	-0.70
2	1.41	13.00	-0.80
4	2.00	13.10	-0.90
9	3.00	13.20	-1.00
16	4.00	13.40	-1.20
30	5.48	13.60	-1.40
60	7.75	14.00	-1.80
120	10.95	14.60	-2.40
240	15.49	15.20	-3.00
360	18.97	15.55	-3.35


Initial Height (in)	2.971	Init. Vol. (CC)	100.12
Height Change (in)	0.021	Vol. Change (CC)	14.80
Ht. After Cons. (in)	2.950	Cell Exp. (CC)	7.60
Initial Area (sq in)	2.056	Net Change (CC)	7.20
Area After Cons. (sq in)	1.922	Cons. Vol. (CC)	92.92

Data entry by: MLM Date: 10/08/2012
 Checked by: CHK Date: 10/11/12
 FileName: LKP0A121




CONSOLIDATION DATA

211-A-012, 10-12', 211A012PERM1

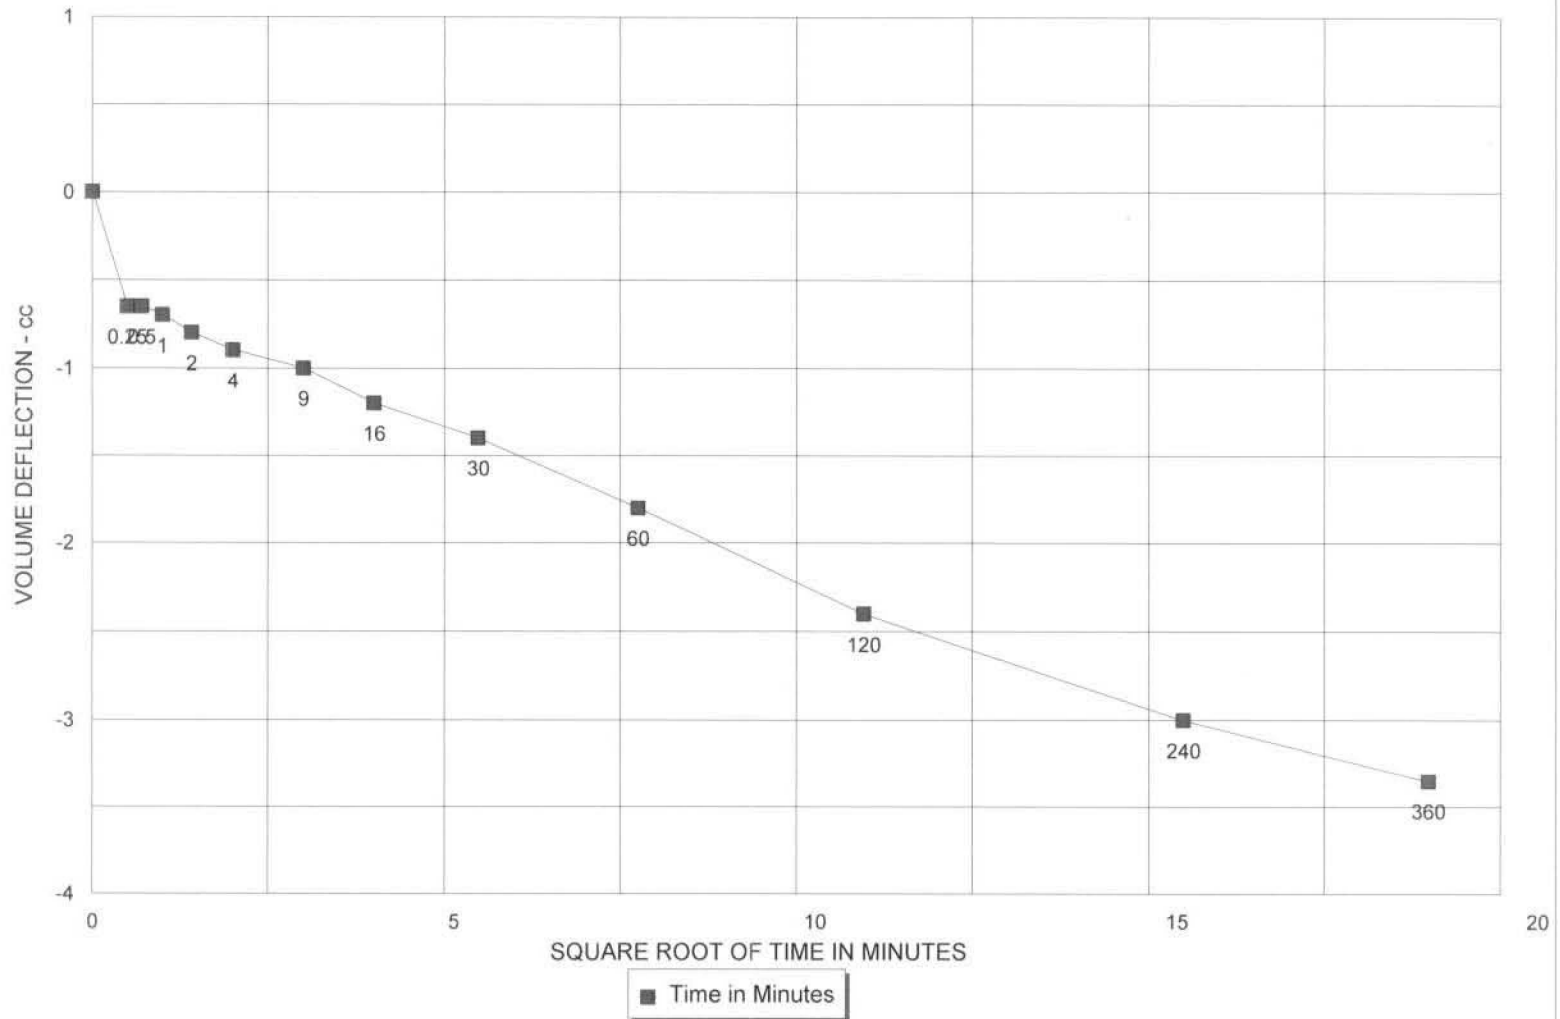

Preliminary Flow Pump Data

LATA-KY, SW Plume Geotechnical, 211A012PERM1, 10-12'

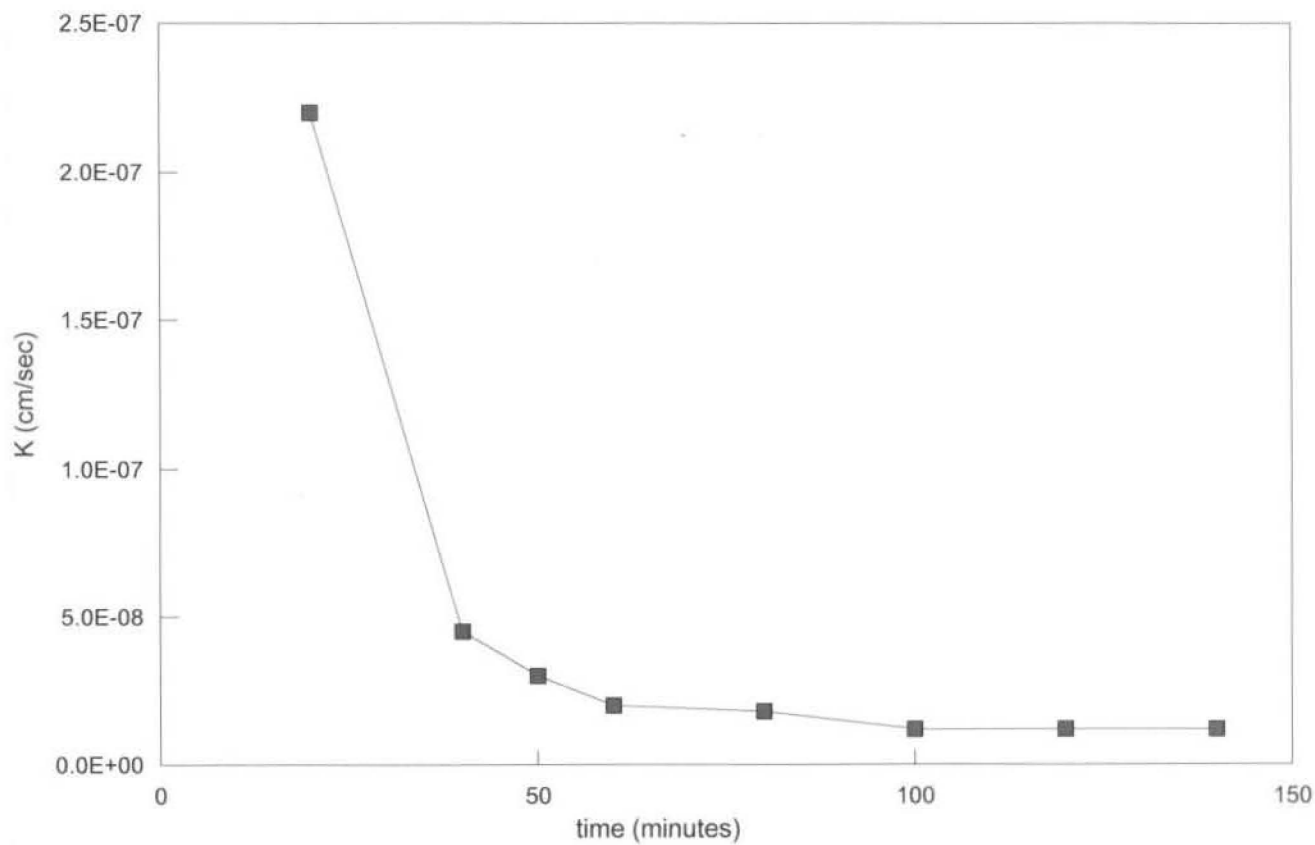


Average last 3 values
1.2E-08


Data Entered By:
Data Checked By:
File Name:

CAL
gm
LK FPA121

Date: 10/06/2012
Date Checked 10/12/12



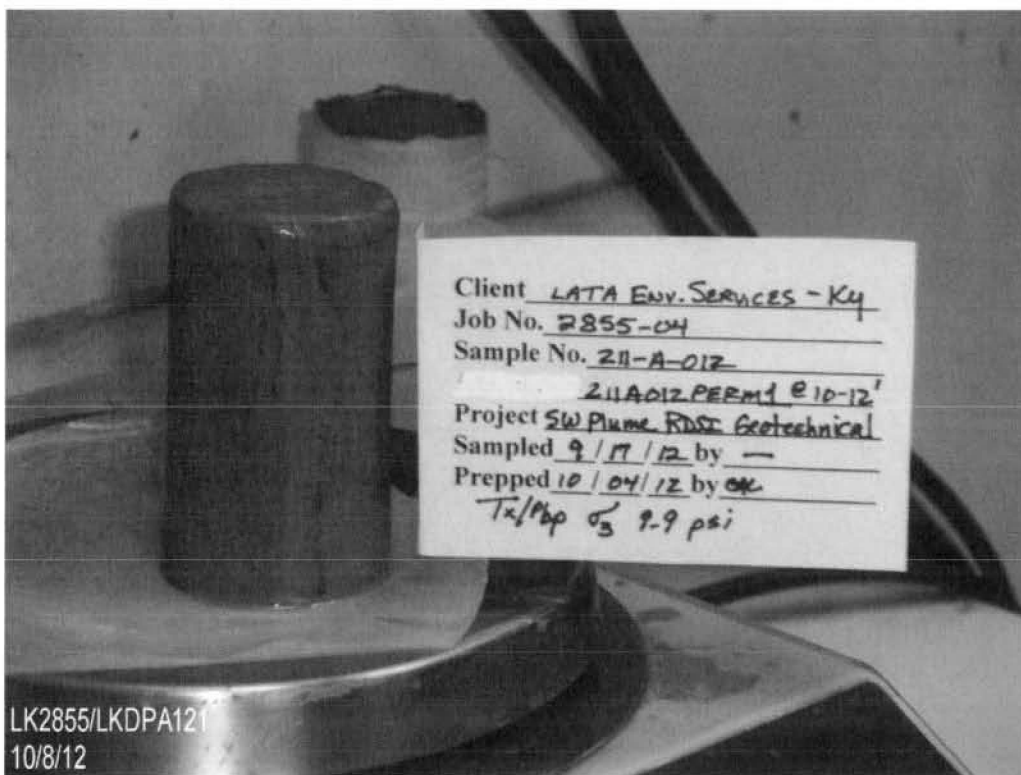

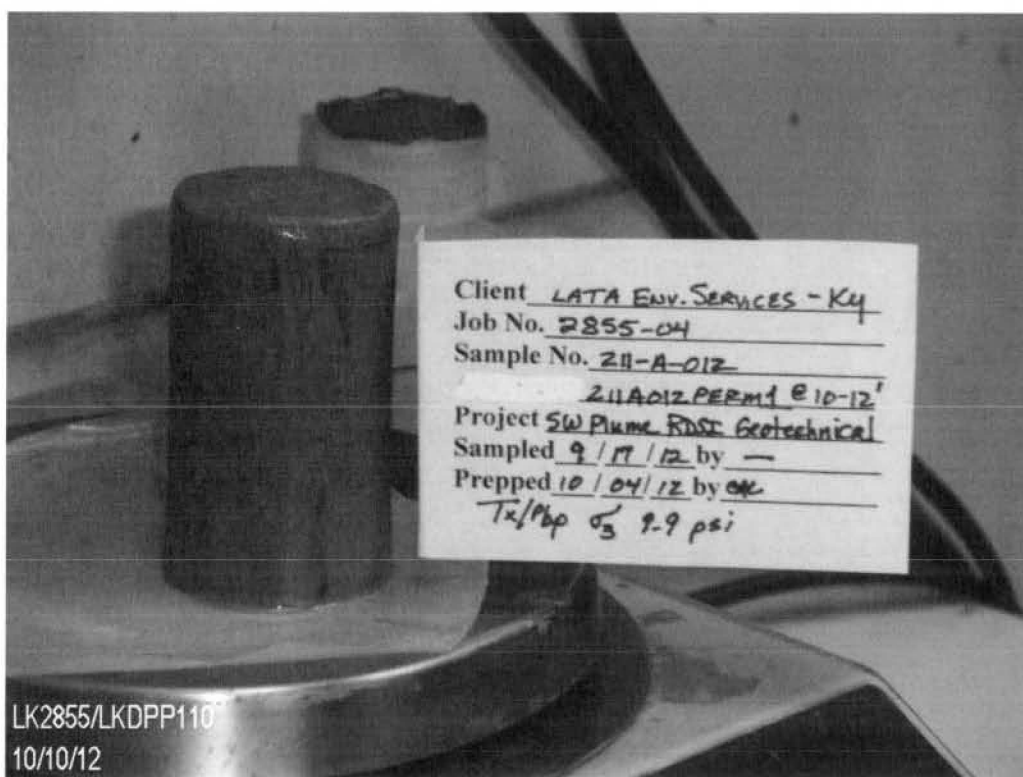

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Service-Ky

JOB NO. 2855-04

BORING NO.	211-A-012	SAMPLED	9/17/12
DEPTH	23-25'	TEST STARTED	10/04/12 CAL
SAMPLE NO.	211A012PERM2	TEST FINISHED	10/09/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	CELL NUMBER	15S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	3105	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	214.8	215.8	
Wt. Wet Soil & Pan (g)	223.0	223.9	
Wt. Dry Soil & Pan (g)	197.5	197.5	
Wt. Lost Moisture (g)	25.4	26.4	
Wt. of Pan Only (g)	8.1	8.1	
Wt. of Dry Soil (g)	189.4	189.4	
Moisture Content %	13.4	13.9	
Wet Density PCF	134.5	143.3	
Dry Density PCF	118.6	125.8	
Init. Diameter (in)	1.613	(cm)	4.097
Init. Area (sq in)	2.043	(sq cm)	13.184
Init. Height (in)	2.977	(cm)	7.562
Vol. Bef. Consol. (cu ft)	0.00352		
Vol. After Consol. (cu ft)	0.00332		
Porosity %	28.07		

FLOW PUMP CALCULATIONS

Pump Setting	5
Velocity CM/Sec	3.29E-05
Q (cc/s)	1.05E-06
Height	2.920
Diameter	1.582
Pressure (psi)	2.510
Area after consol. (cm*cm)	12.674
Gradient	23.794
Permeability k (cm/s)	3.5E-09
Permeability k (m/s)	3.5E-11
Back Pressure (psi)	48.0
Cell Pressure (psi)	69.6
Ave. Effective Stress (psi)	20.345

Average temperature degree C: 22.4

Notes: Sample diameter is less than specification for nominal particle size in sample.

Data entry by: MLM Date: 10/10/2012
 Checked by: CHE Date: 10/12/2012
 FileName: LKP0A122



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Service-Ky	JOB NO.	2855-04
BORING NO.	211-A-012	SAMPLED	9/17/12
DEPTH	23-25'	TEST STARTED	10/04/12 CAL
SAMPLE NO.	211A012PERM2	TEST FINISHED	10/09/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	SETUP NO.	15S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	3105	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)		Pore Pressure (PSI)		Change	B
		Close	Open	Close	Open		
40.0	38.0	1.8	7.3				
50.0	48.0	9.5	10.4	39.2	48.5	9.3	0.93
60.0		11.4	11.8	49.0	58.7	9.7	0.97

CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	11.80	0.00
0.25	0.50	14.25	-2.45
0.5	0.71	14.40	-2.60
1	1.00	14.60	-2.80
2	1.41	14.85	-3.05
4	2.00	15.10	-3.30
9	3.00	15.40	-3.60
16	4.00	15.60	-3.80
30	5.48	15.80	-4.00
60	7.75	16.10	-4.30
120	10.95	16.30	-4.50
240	15.49	16.50	-4.70
360	18.97	16.55	-4.75


Initial Height (in)	2.977	Init. Vol. (CC)	99.70
Height Change (in)	0.057	Vol. Change (CC)	15.20
Ht. After Cons. (in)	2.920	Cell Exp. (CC)	9.51
Initial Area (sq in)	2.043	Net Change (CC)	5.69
Area After Cons. (sq in)	1.964	Cons. Vol. (CC)	94.02

Data entry by: MLM Date: 10/10/2012
 Checked by: CLL Date: 10/12/2012
 FileName: LKP0A122




CONSOLIDATION DATA

211-A-012, 23-25', 211A012PERM2

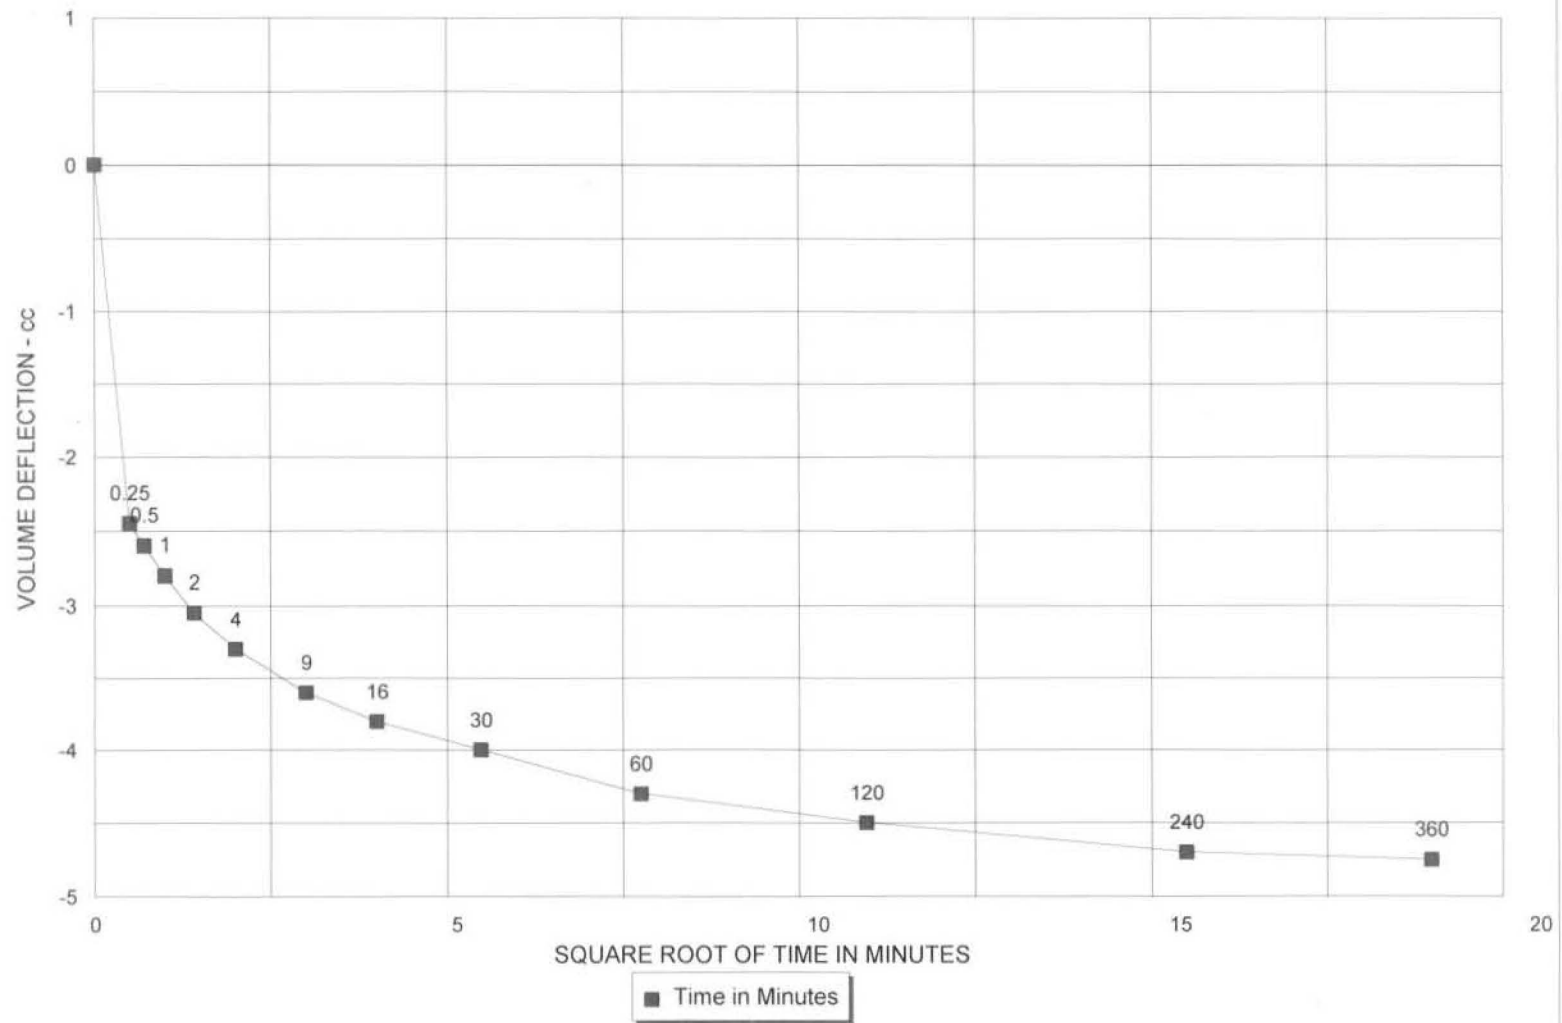

Preliminary Flow Pump Data

LATA-KY, SW Plume Geotechnical, 211A012PERM2, 23-25'

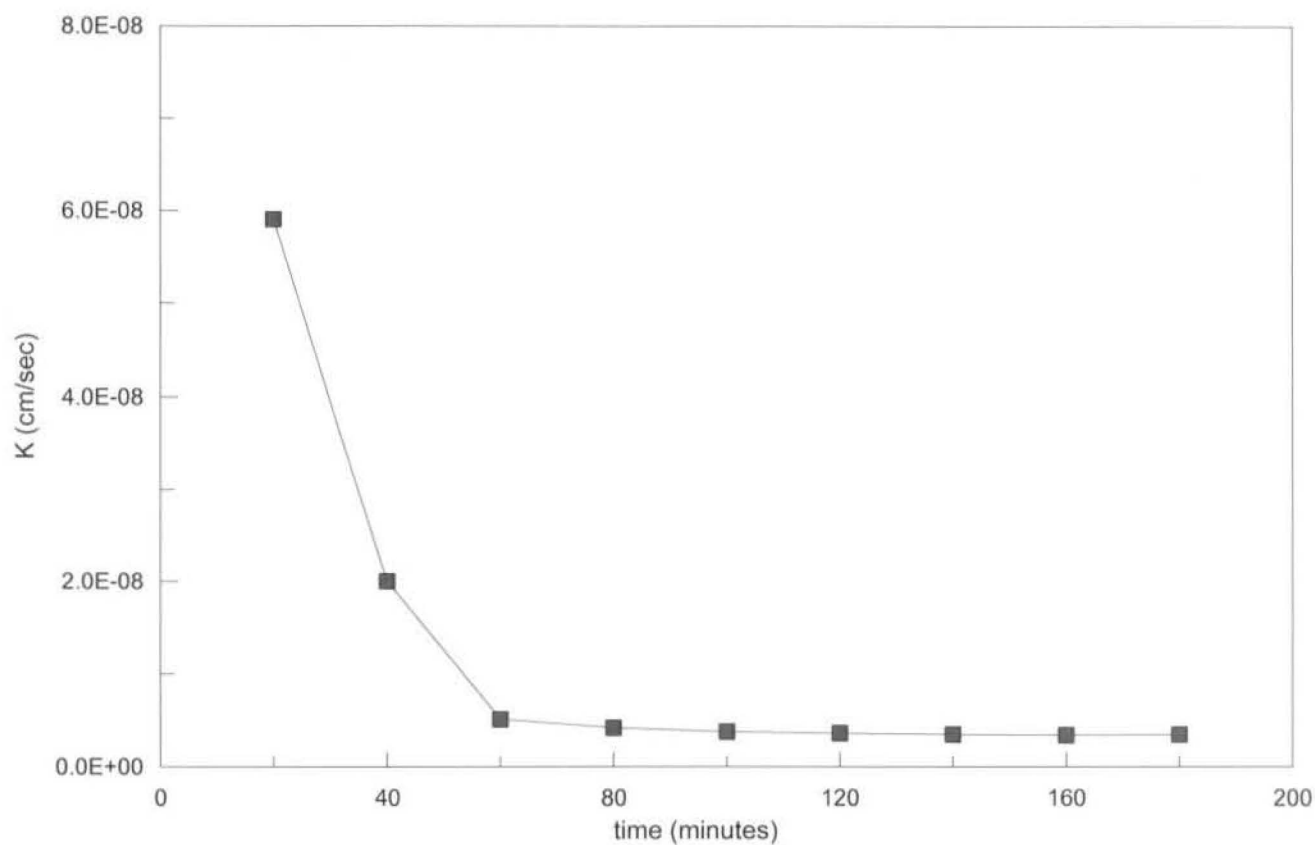


Average last 3 values
3.5E-09

Data Entered By:
Data Checked By:
File Name:

CAL
ym
LKFA122

Date: 10/09/2012
Date Checked 10/10/12



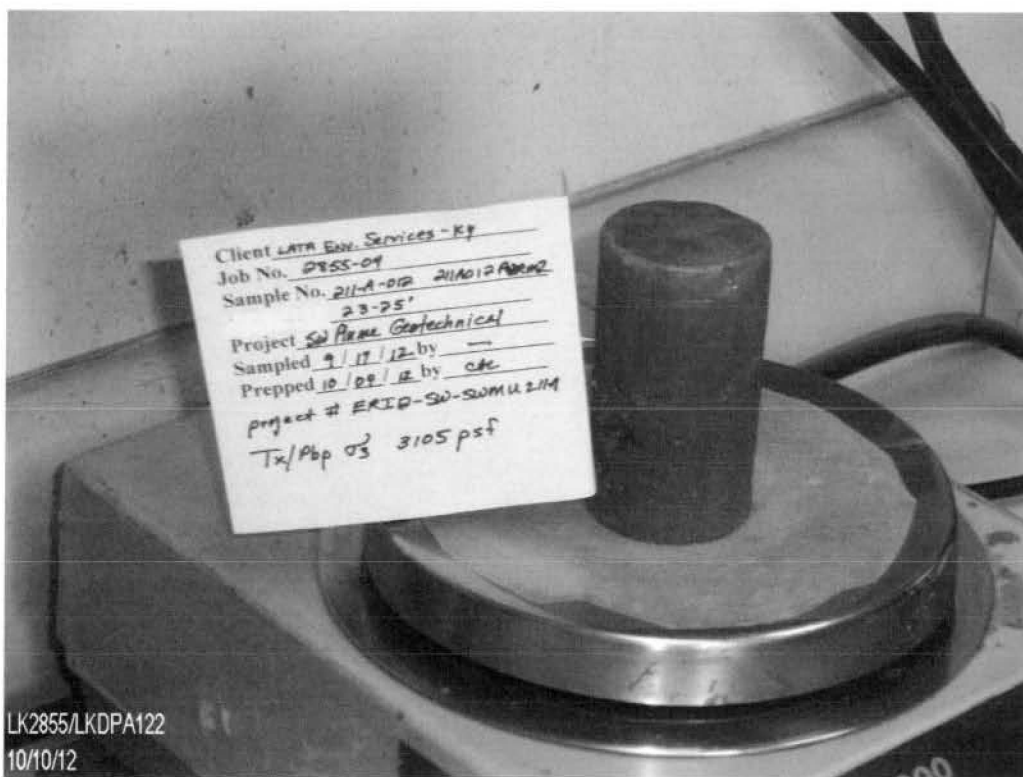

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT	LATA Environmenetal Services -KY	JOB NO.	2855-04
BORING NO.	211-A-012	SAMPLED	09/17/12
DEPTH	38-40'	TEST STARTED	10/06/12 CAL
SAMPLE NO.	211A012PERM3	TEST FINISHED	10/16/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	CELL NUMBER	13S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	5046	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	197.8	194.4	
Wt. Wet Soil & Pan (g)	206.1	202.7	
Wt. Dry Soil & Pan (g)	164.4	164.4	
Wt. Lost Moisture (g)	41.8	38.3	
Wt. of Pan Only (g)	8.3	8.3	
Wt. of Dry Soil (g)	156.0	156.0	
Moisture Content %	26.8	24.6	
Wet Density PCF	123.0	124.1	
Dry Density PCF	97.0	99.6	
Init. Diameter (in)	1.620	(cm)	4.115
Init. Area (sq in)	2.061	(sq cm)	13.299
Init. Height (in)	2.972	(cm)	7.549
Vol. Bef. Consol. (cu ft)	0.00355		
Vol. After Consol. (cu ft)	0.00345		
Porosity %	39.21		

FLOW PUMP CALCULATIONS

Pump Setting	19
Velocity CM/Sec	1.25E-04
Q (cc/s)	3.99E-06
Height	2.868
Diameter	1.627
Pressure (psi)	4.100
Area after consol. (cm*cm)	13.421
Gradient	39.571
Permeability k (cm/s)	7.5E-09
Permeability k (m/s)	7.5E-11
Back Pressure (psi)	108.0
Cell Pressure (psi)	143.0
Ave. Effective Stress (psi)	32.950
Average temperature degree C:	22.7

Data entry by: DAW Date: 10/18/2012
 Checked by: ada Date: 10/18/12
 FileName: LKP00123



TRIAxAL COMPRESSION TEST DATA

CLIENT LATA Environmenetal Services -KY

JOB NO. 2855-04

BORING NO. 211-A-012
 DEPTH 38-40'
 SAMPLE NO. 211A012PERM3
 SOIL DESCR. ERI12-SW-SWMU211A
 LOCATION SW Plume RDSI Geotechnical
 CONF. PRES. PSF 5046

SAMPLED 09/17/12
 TEST STARTED 10/06/12 CAL
 TEST FINISHED 10/16/12 CAL
 SETUP NO. 13S
 SATURATED TEST Yes
 TEST TYPE TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)		Pore Pressure (PSI)		Change	B
		Close	Open	Close	Open		
40.0	38.0	1.1	6.5				
50.0	48.0	7.4	8.2	39.0	47.3	8.3	0.83
60.0	58.0	8.0	8.7	49.0	57.9	8.9	0.89
70.0	68.0	8.9	9.6	58.9	67.3	8.4	0.84
80.0	78.0	9.7	10.4	68.9	77.7	8.8	0.88
90.0	88.0	10.7	11.4	79.0	88.0	9.0	0.90
100.0	98.0	11.5	12.1	88.9	98.1	9.2	0.92
110.0	108.0	12.5	-	98.8	108.0	9.2	0.92
120.0		13.1	13.1	108.4	117.9	9.5	0.95


CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.30	0.00
0.25	0.50	2.60	-2.30
0.5	0.71	2.70	-2.40
1	1.00	2.80	-2.50
2	1.41	2.90	-2.60
4	2.00	3.05	-2.75
9	3.00	3.30	-3.00
16	4.00	3.55	-3.25
30	5.48	3.90	-3.60
60	7.75	4.50	-4.20
120	10.95	5.10	-4.80
240	15.49	5.80	-5.50
360	18.97	6.20	-5.90

Initial Height (in)	2.972	Init. Vol. (CC)	100.40
Height Change (in)	0.104	Vol. Change (CC)	18.80
Ht. After Cons. (in)	2.868	Cell Exp. (CC)	16.19
Initial Area (sq in)	2.061	Net Change (CC)	2.61
Area After Cons. (sq in)	2.080	Cons. Vol. (CC)	97.79


Data entry by: DAW Date: 10/18/2012
 Checked by: DAW Date: 10/18/12
 FileName: LKP00123



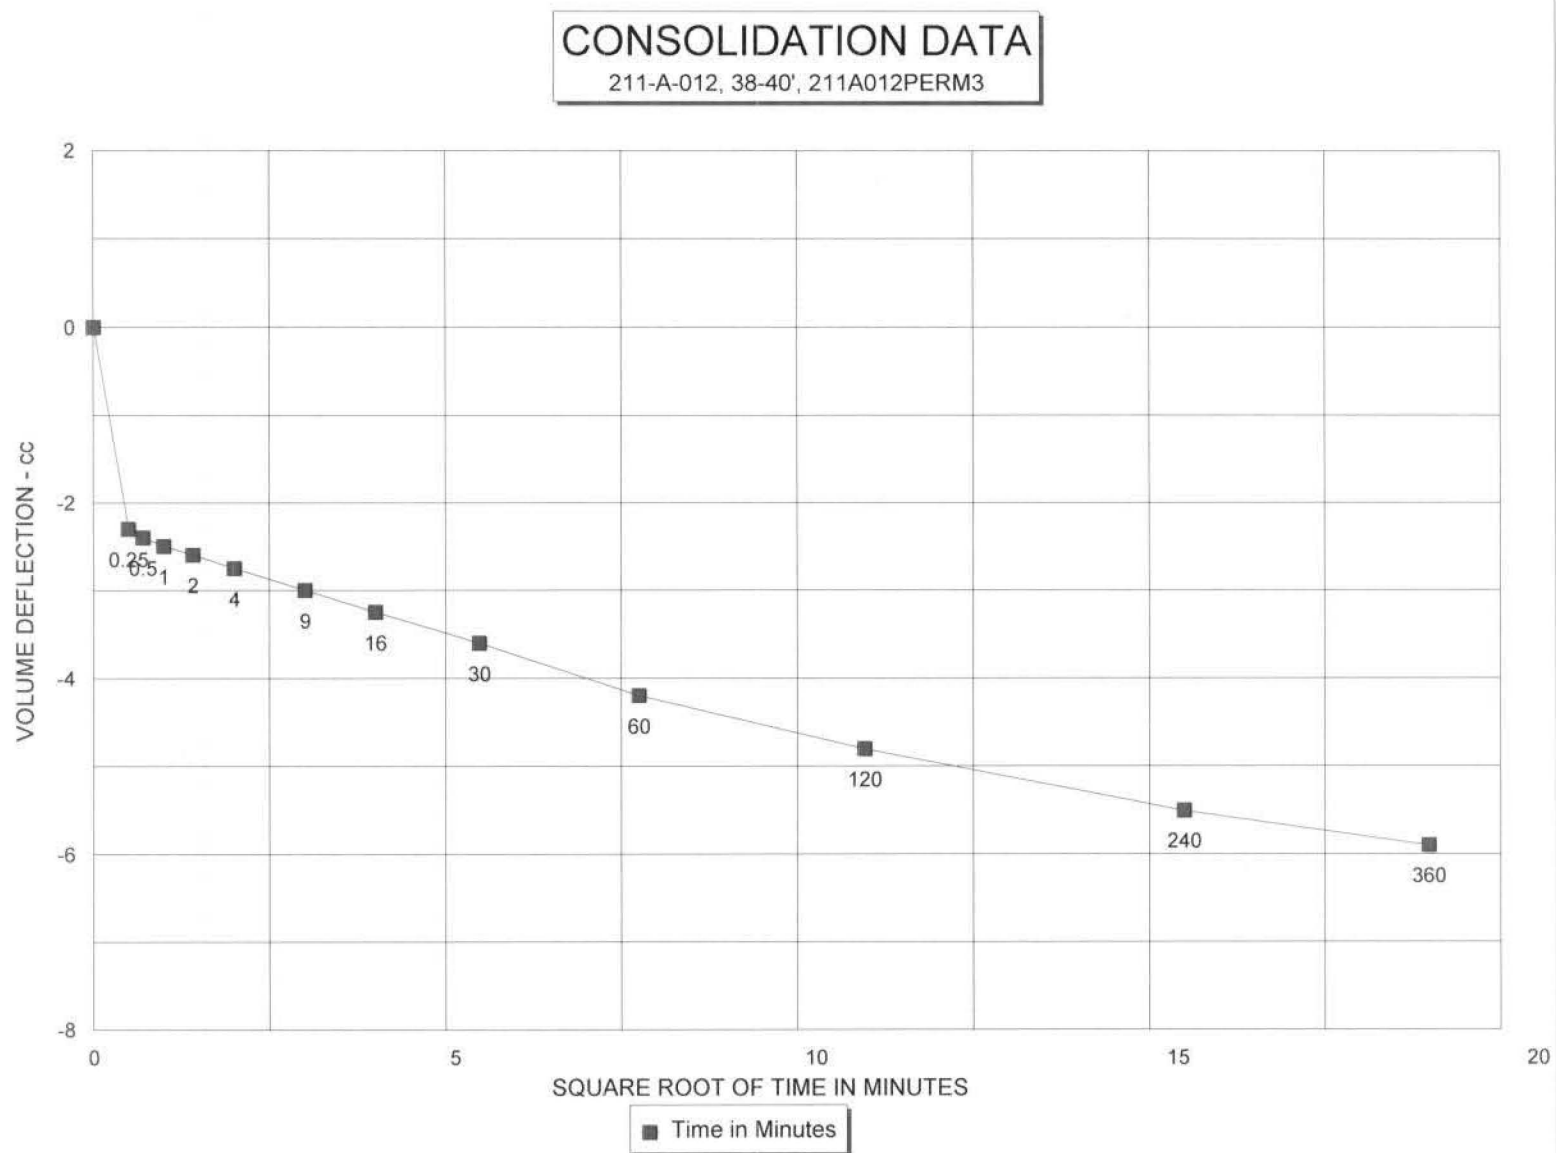

Preliminary Flow Pump Data

LATA-KY, 211-A-012 PERM3, 38-40'

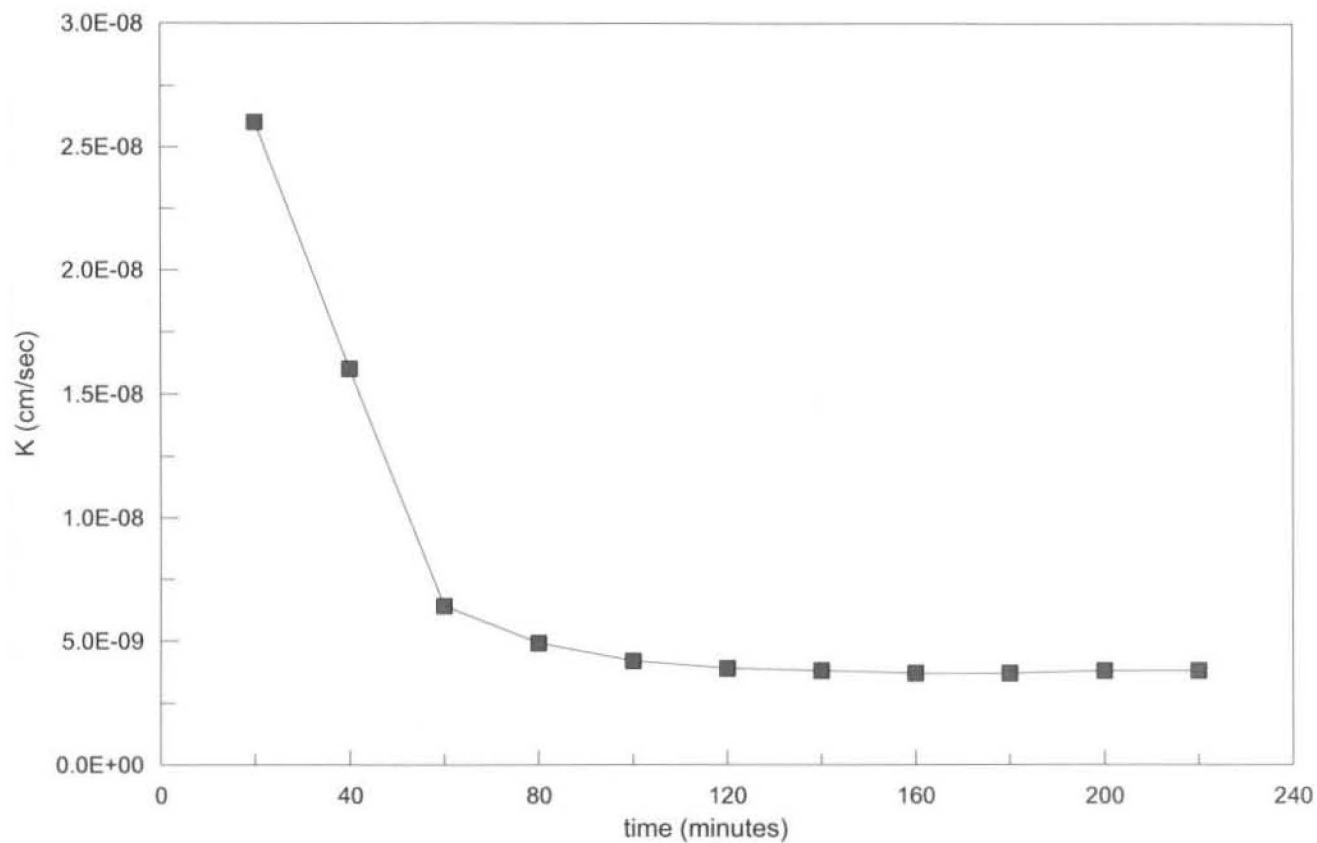


Average last 4 values
3.8E-09

Data Entered By:
Data Checked By:
File Name:

CAL
D/W
LKFP0123

Date: 10/17/2012
Date Checked 10/18/12



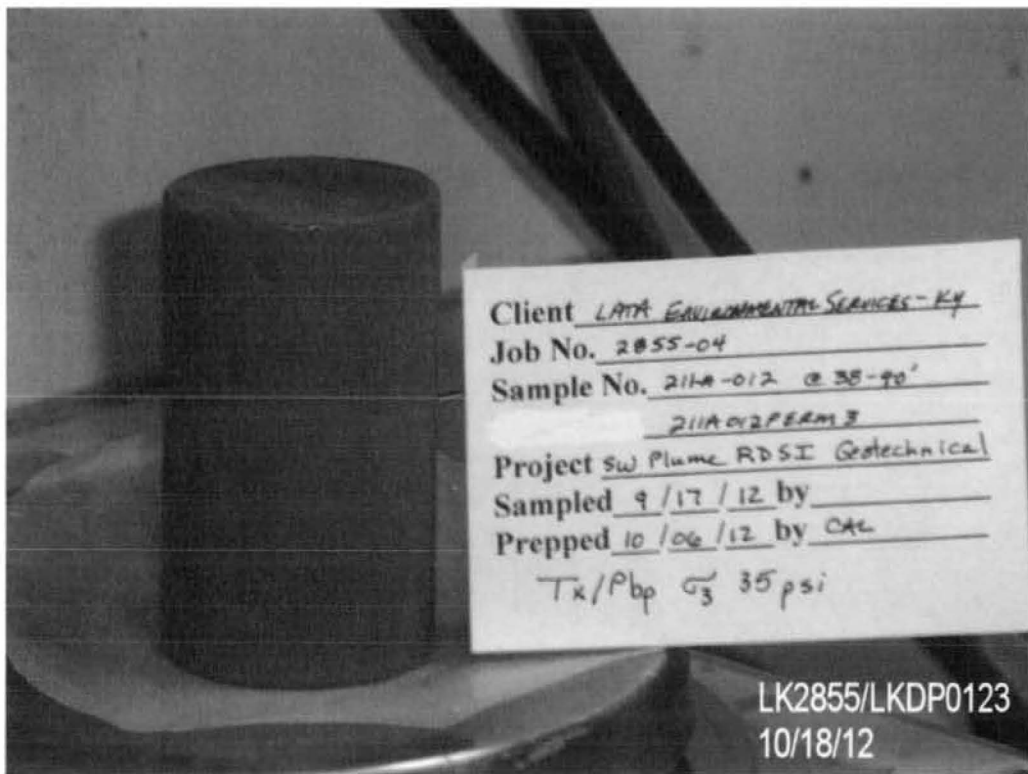

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT	LATA Environmental Services - KY	JOB NO.	2855-04
BORING NO.	211-A-027	SAMPLED	09/18/12
DEPTH	10-12'	TEST STARTED	10/04/12 CAL
SAMPLE NO.	211A027PERM1	TEST FINISHED	10/11/12 CAL
SOIL DESCR.	ER12-SW-SWMU211A	CELL NUMBER	14S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	1423	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	192.6	189.8	
Wt. Wet Soil & Pan (g)	200.8	198.0	
Wt. Dry Soil & Pan (g)	165.3	165.3	
Wt. Lost Moisture (g)	35.5	32.7	
Wt. of Pan Only (g)	8.2	8.2	
Wt. of Dry Soil (g)	157.1	157.1	
Moisture Content %	22.6	20.8	
Wet Density PCF	127.7	128.1	
Dry Density PCF	104.2	106.0	
Init. Diameter (in)	1.564	(cm)	3.973
Init. Area (sq in)	1.921	(sq cm)	12.395
Init. Height (in)	2.991	(cm)	7.597
Vol. Bef. Consol. (cu ft)	0.00333		
Vol. After Consol. (cu ft)	0.00327		
Porosity %	35.31		

FLOW PUMP CALCULATIONS

Pump Setting	15
Velocity CM/Sec	9.85E-05
Q (cc/s)	3.15E-06
Height	2.956
Diameter	1.559
Pressure (psi)	1.403
Area after consol. (cm*cm)	12.321
Gradient	13.138
Permeability k (cm/s)	1.9E-08
Permeability k (m/s)	1.9E-10
Back Pressure (psi)	68.0
Cell Pressure (psi)	77.9
Ave. Effective Stress (psi)	9.199
Average temperature degree C:	22.3

Data entry by: DAW Date: 10/12/2012
 Checked by: CA Date: 10-12-12
 FileName: LKP00271



TRIAxAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services - KY	JOB NO.	2855-04
BORING NO.	211-A-027	SAMPLED	09/18/12
DEPTH	10-12'	TEST STARTED	10/04/12 CAL
SAMPLE NO.	211A027PERM1	TEST FINISHED	10/11/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	SETUP NO.	14S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	1423	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)		Pore Pressure (PSI)		Change	B
		Close	Open	Close	Open		
40.0	38.0	2.2	8.1				
50.0	48.0	10.6	11.4	38.8	46.8	8.0	0.80
60.0	58.0	11.7	12.5	48.9	57.8	8.9	0.89
70.0	68.0	12.4	13.1	58.7	68.1	9.4	0.94
80.0		13.5	13.8	68.6	78.1	9.5	0.95


CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.20	0.00
0.25	0.50	0.85	-0.65
0.5	0.71	0.85	-0.65
1	1.00	0.90	-0.70
2	1.41	0.90	-0.70
4	2.00	1.00	-0.80
9	3.00	1.10	-0.90
16	4.00	1.25	-1.05
30	5.48	1.45	-1.25
60	7.75	1.75	-1.55
120	10.95	2.10	-1.90
240	15.49	2.50	-2.30
360	18.97	2.60	-2.40

Initial Height (in)	2.991	Init. Vol. (CC)	94.18
Height Change (in)	0.035	Vol. Change (CC)	14.40
Ht. After Cons. (in)	2.956	Cell Exp. (CC)	12.75
Initial Area (sq in)	1.921	Net Change (CC)	1.65
Area After Cons. (sq in)	1.910	Cons. Vol. (CC)	92.53


Data entry by: DAW Date: 10/12/2012
 Checked by: ape Date: 10-12-12
 FileName: LKP00271



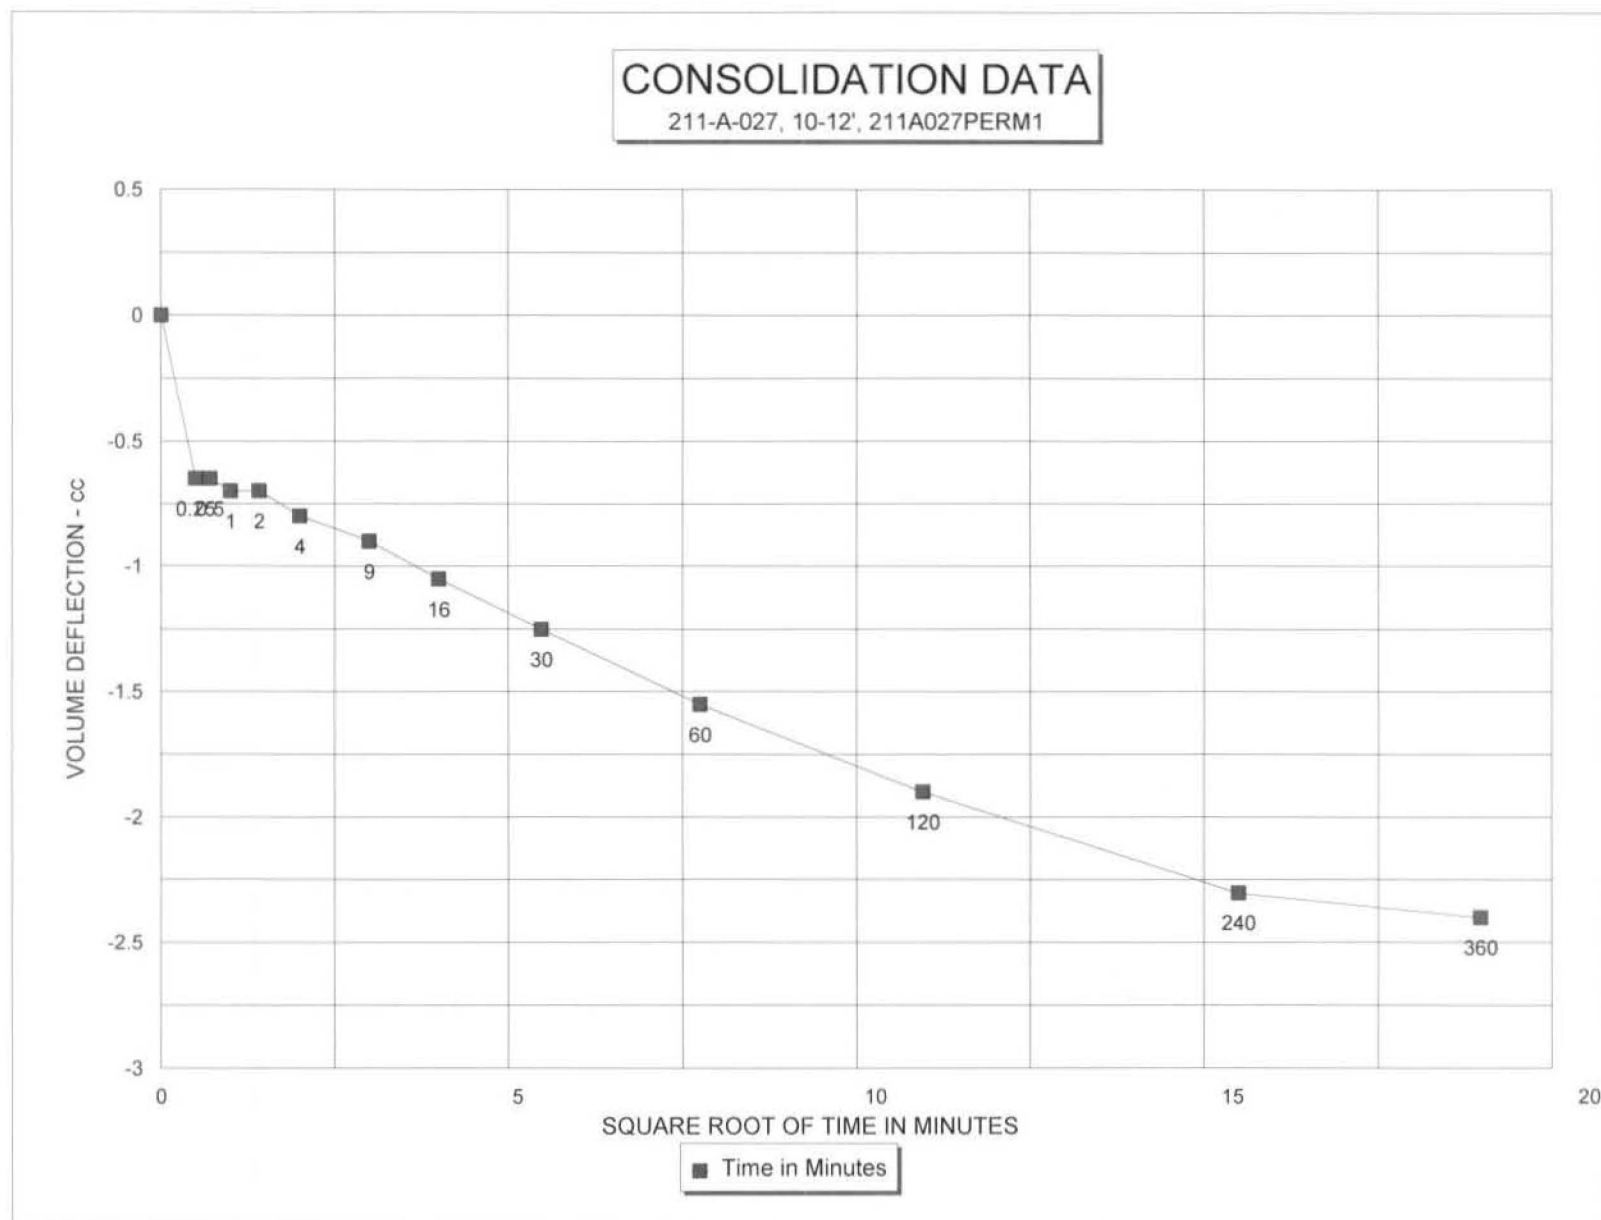

Preliminary Flow Pump Data

LATA-KY, 211A027PERM1 @ 10-12'

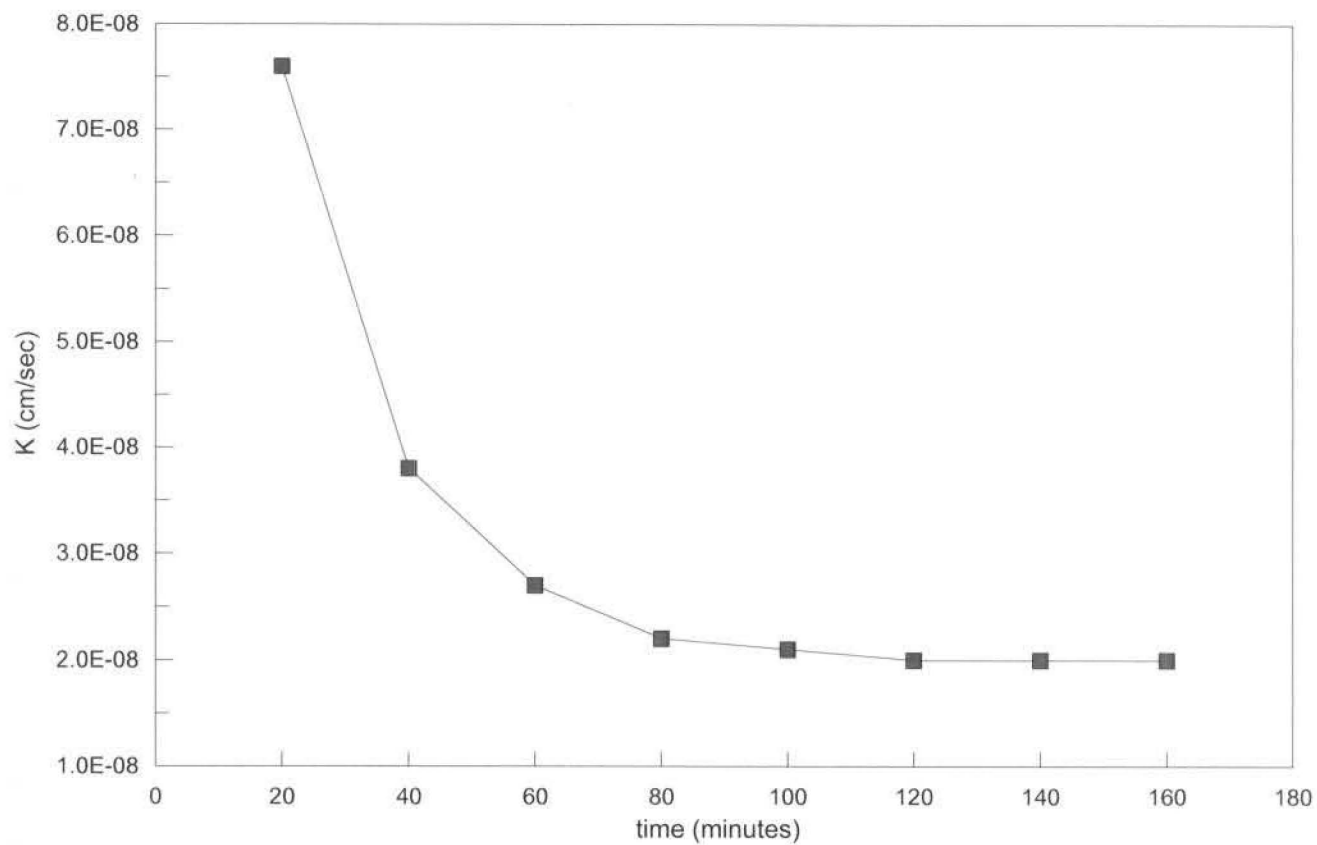


Average last 4 values
2.0E-08

Data Entered By:
Data Checked By:
File Name:

CAL
DAW
LKFP0271

Date: 10-11-2012
Date Checked 10/12/12



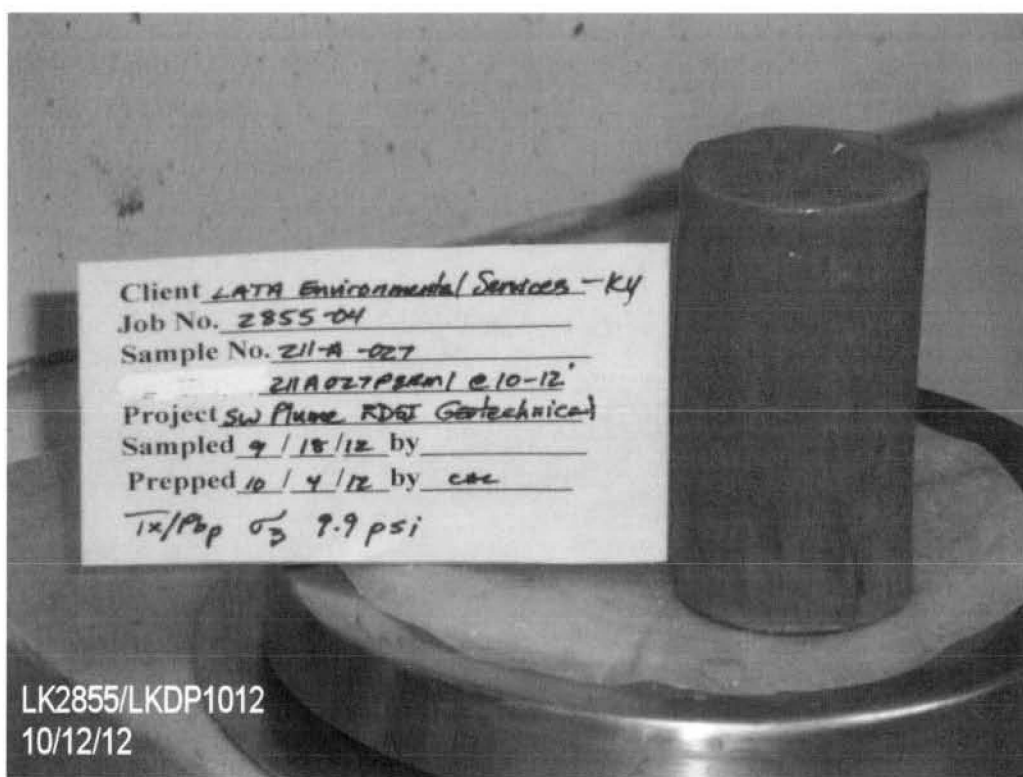

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services - KY

JOB NO. 2855-04

BORING NO.	211-A-027	SAMPLED	
DEPTH	22.5-24.5'	TEST STARTED	10/10/12 CAL
SAMPLE NO.	211A027PERM2	TEST FINISHED	10/15/12 DPM
SOIL DESCR.	ERI12-SW-SWMU211A	CELL NUMBER	15S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	2911	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST
Wt. Soil + Moisture (g)	249.3	252.1
Wt. Wet Soil & Pan (g)	255.9	258.7
Wt. Dry Soil & Pan (g)	228.6	228.6
Wt. Lost Moisture (g)	27.3	30.1
Wt. of Pan Only (g)	6.6	6.6
Wt. of Dry Soil (g)	222.0	222.0
Moisture Content %	12.3	13.6
Wet Density PCF	136.1	139.8
Dry Density PCF	121.2	123.1

Init. Diameter (in)	1.663	(cm)	4.224
Init. Area (sq in)	2.172	(sq cm)	14.014
Init. Height (in)	3.212	(cm)	8.158
Vol. Bef. Consol. (cu ft)	0.00404		
Vol. After Consol. (cu ft)	0.00397		
Porosity %	26.75		

FLOW PUMP CALCULATIONS

Pump Setting	5
Velocity CM/Sec	3.29E-05
Q (cc/s)	1.05E-06
Height	3.181
Diameter	1.658
Pressure (psi)	2.260
Area after consol. (cm*cm)	13.929
Gradient	19.666
Permeability k (cm/s)	3.8E-09
Permeability k (m/s)	3.8E-11
Back Pressure (psi)	58.0
Cell Pressure (psi)	78.2
Ave. Effective Stress (psi)	19.070
Average temperature degree C:	22.4

Data entry by: DAW Date: 10/16/2012
 Checked by: DAW Date: 10/16/12
 FileName: LKP027P2



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services - KY	JOB NO.	2855-04
BORING NO.	211-A-027	SAMPLED	
DEPTH	22.5-24.5'	TEST STARTED	10/10/12 CAL
SAMPLE NO.	211A027PERM2	TEST FINISHED	10/15/12 DPM
SOIL DESCR.	ERI12-SW-SWMU211A	SETUP NO.	15S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	2911	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	1.7 7.7			
50.0	48.0	7.7 8.7	39.1 47.6	8.5	0.85
60.0	58.0	8.9 9.7	49.2 58.2	9.0	0.90
70.0		9.8 10.0	59.1 68.6	9.5	0.95


CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	10.00	0.00
0.25	0.50	11.45	-1.45
0.5	0.71	11.50	-1.50
1	1.00	11.60	-1.60
2	1.41	11.70	-1.70
4	2.00	11.80	-1.80
9	3.00	12.00	-2.00
16	4.00	12.20	-2.20
30	5.48	12.50	-2.50
60	7.75	12.80	-2.80
120	10.95	13.00	-3.00
240	15.49	13.10	-3.10
360	18.97	13.20	-3.20

Initial Height (in)	3.212	Init. Vol. (CC)	114.35
Height Change (in)	0.031	Vol. Change (CC)	12.10
Ht. After Cons. (in)	3.181	Cell Exp. (CC)	10.32
Initial Area (sq in)	2.172	Net Change (CC)	1.78
Area After Cons. (sq in)	2.159	Cons. Vol. (CC)	112.56


Data entry by: DAW Date: 10/16/2012
 Checked by: OK Date: 10/16/12
 FileName: LKP027P2



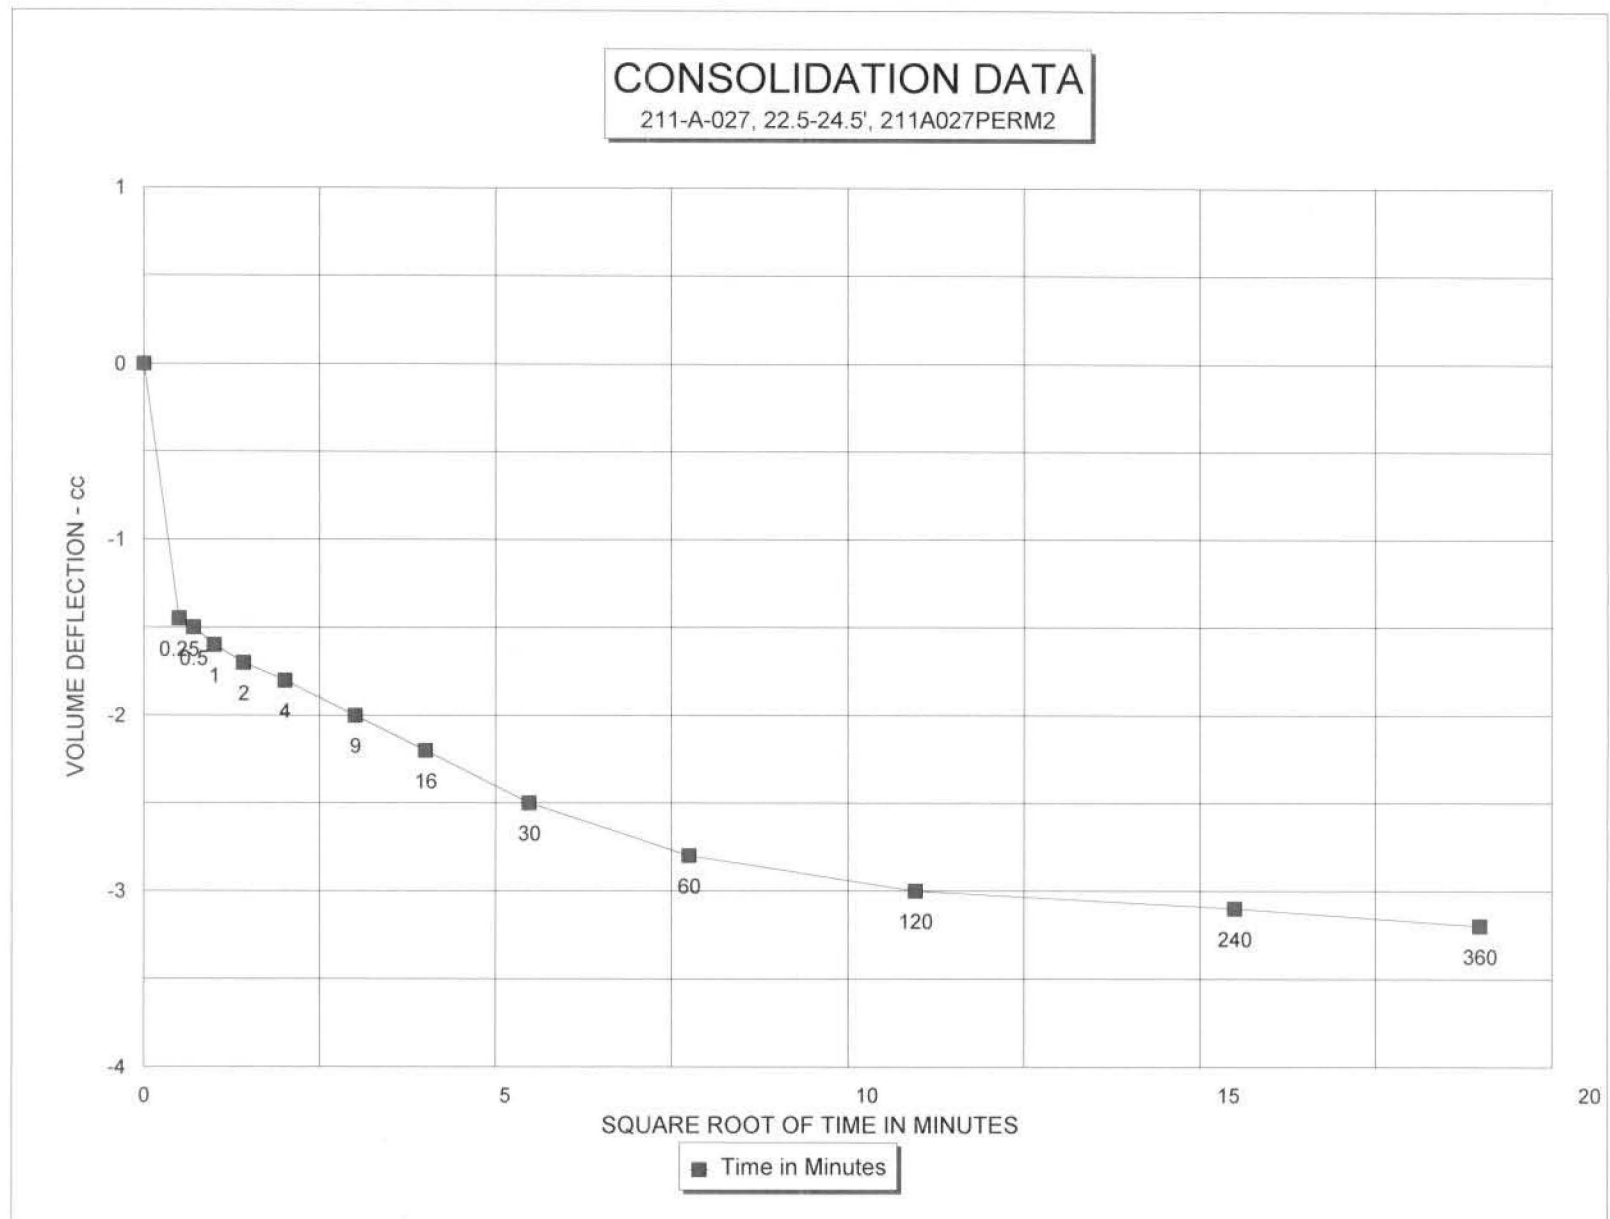


Preliminary Flow Pump Data

LATA, 211--027, 22.-24.5, 211A027PERM2

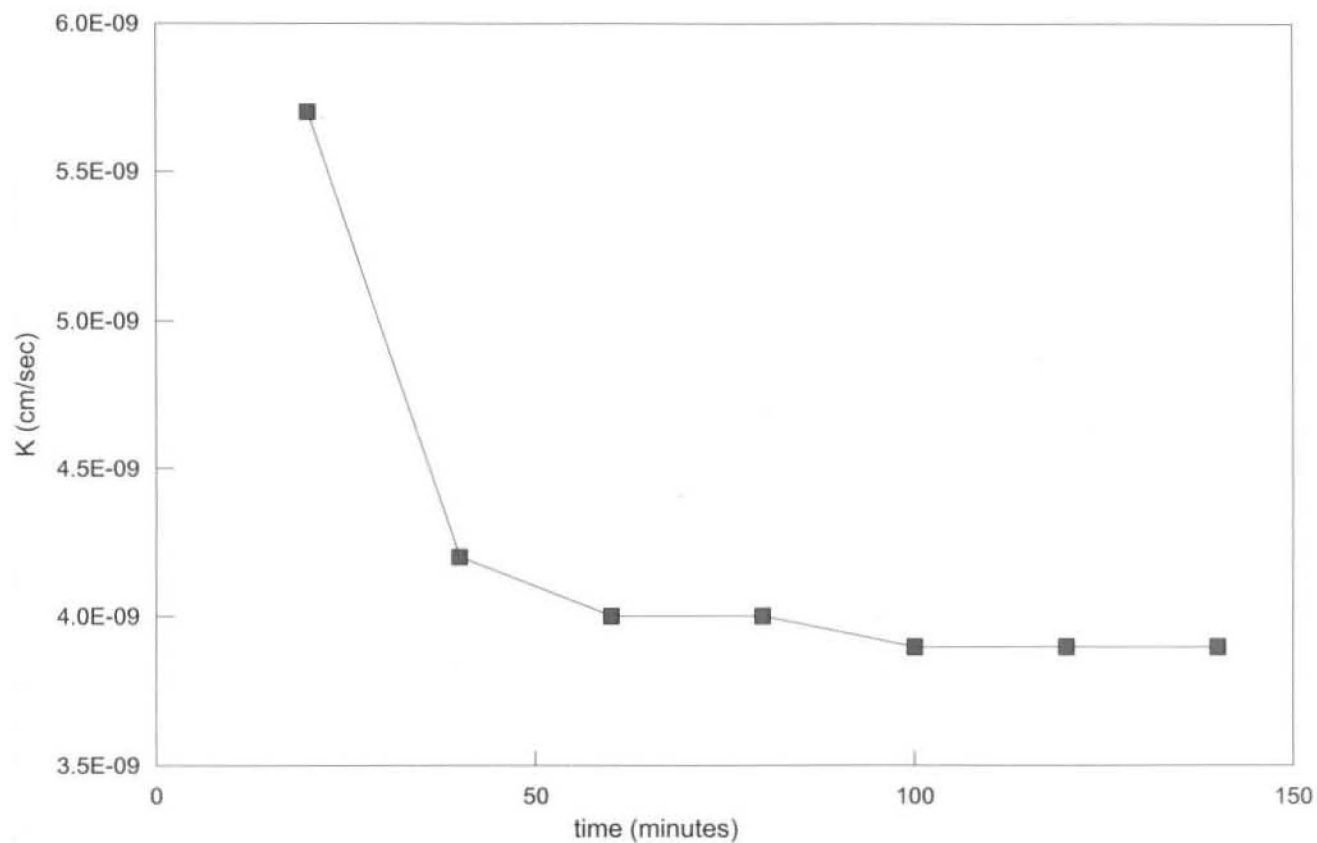

Average last 4 values
3.9E-09

Data Entered By:
Data Checked By:
File Name:

DPM

LKFP27P2

Date: 10/15/2012
Date Checked 10/16/12



Client LATA Environmental-ky
Job No. 2855-04
Boring No. 211-A-027
Depth 22.5-24.5'
Sample No. 211A027 PERM 2
Project SWP/ma RPSI Geo.
Sampled / / by
Prepped / / by
Project No. EA12-SW-SUM41211A

$T_x/P_{6p} \sigma_3 = 2911 \text{ psi}$

LK2855/LKDP27P2
10/16/12

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services - KY

JOB NO. 2855-02

BORING NO.	MW513	SAMPLED	08/27/12 KD
DEPTH	10-12'	TEST STARTED	9/15/12 CAL
SAMPLE NO.	MW513 PERM1	TEST FINISHED	9/24/12 DPM
SOIL DESCR.	ERI12-SW-SWMU211A	CELL NUMBER	15S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	1423	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	649.7	647.0	
Wt. Wet Soil & Pan (g)	664.0	661.3	
Wt. Dry Soil & Pan (g)	541.0	541.0	
Wt. Lost Moisture (g)	122.9	120.2	
Wt. of Pan Only (g)	14.2	14.2	
Wt. of Dry Soil (g)	526.8	526.8	
Moisture Content %	23.3	22.8	
Wet Density PCF	127.0	129.8	
Dry Density PCF	103.0	105.7	
Init. Diameter (in)	2.839	(cm)	7.211
Init. Area (sq in)	6.330	(sq cm)	40.843
Init. Height (in)	3.078	(cm)	7.818
Vol. Bef. Consol. (cu ft)	0.01128		
Vol. After Consol. (cu ft)	0.01099		
Porosity %	38.64		

FLOW PUMP CALCULATIONS

Pump Setting (gear number)	11
Percentage of Pump setting	100
Q (cc/s)	5.71E-05
Height	3.052
Diameter	2.814
Pressure (psi)	0.429
Area after consol. (cm*cm)	40.129
Gradient	3.891
Permeability k (cm/s)	3.7E-07
Permeability k (m/s)	3.7E-09
Back Pressure (psi)	38.0
Cell Pressure (psi)	47.9
Ave. Effective Stress (psi)	9.686
Average temperature degree C:	22.5

Data entry by: DAW Date: 09/25/2012
 Checked by: OK Date: 9/26/12
 FileName: LKP05131



TRIAXIAL COMPRESSION TEST DATA

CLIENT LATA Environmental Services - KY

JOB NO. 2855-02

BORING NO.	MW513	SAMPLED	08/27/12 KD
DEPTH	10-12'	TEST STARTED	9/15/12 CAL
SAMPLE NO.	MW513 PERM1	TEST FINISHED	9/24/12 DPM
SOIL DESCR.	ERI12-SW-SWMU211A	SETUP NO.	15S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	1423	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close	Open		
40.0	38.0	3.7	10.7		
50.0		11.7	12.0	39.1	49.1
				10.0	1.00

CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	12.10	0.00
0.25	0.50	13.35	-1.25
0.5	0.71	13.50	-1.40
1	1.00	13.80	-1.70
2	1.41	14.20	-2.10
4	2.00	14.70	-2.60
9	3.00	15.60	-3.50
16	4.00	16.50	-4.40
31	5.57	17.40	-5.30
60	7.75	17.90	-5.80
120	10.95	18.20	-6.10
240	15.49	18.30	-6.20
360	18.97	18.40	-6.30


Initial Height (in)	3.078	Init. Vol. (CC)	319.35
Height Change (in)	0.026	Vol. Change (CC)	15.70
Ht. After Cons. (in)	3.052	Cell Exp. (CC)	7.49
Initial Area (sq in)	6.330	Net Change (CC)	8.21
Area After Cons. (sq in)	6.220	Cons. Vol. (CC)	311.14

Data entry by: DAW Date: 09/25/2012
 Checked by: OK Date: 9/26/12
 FileName: LKP05131




CONSOLIDATION DATA

MW513, 10-12', MW513 PERM1

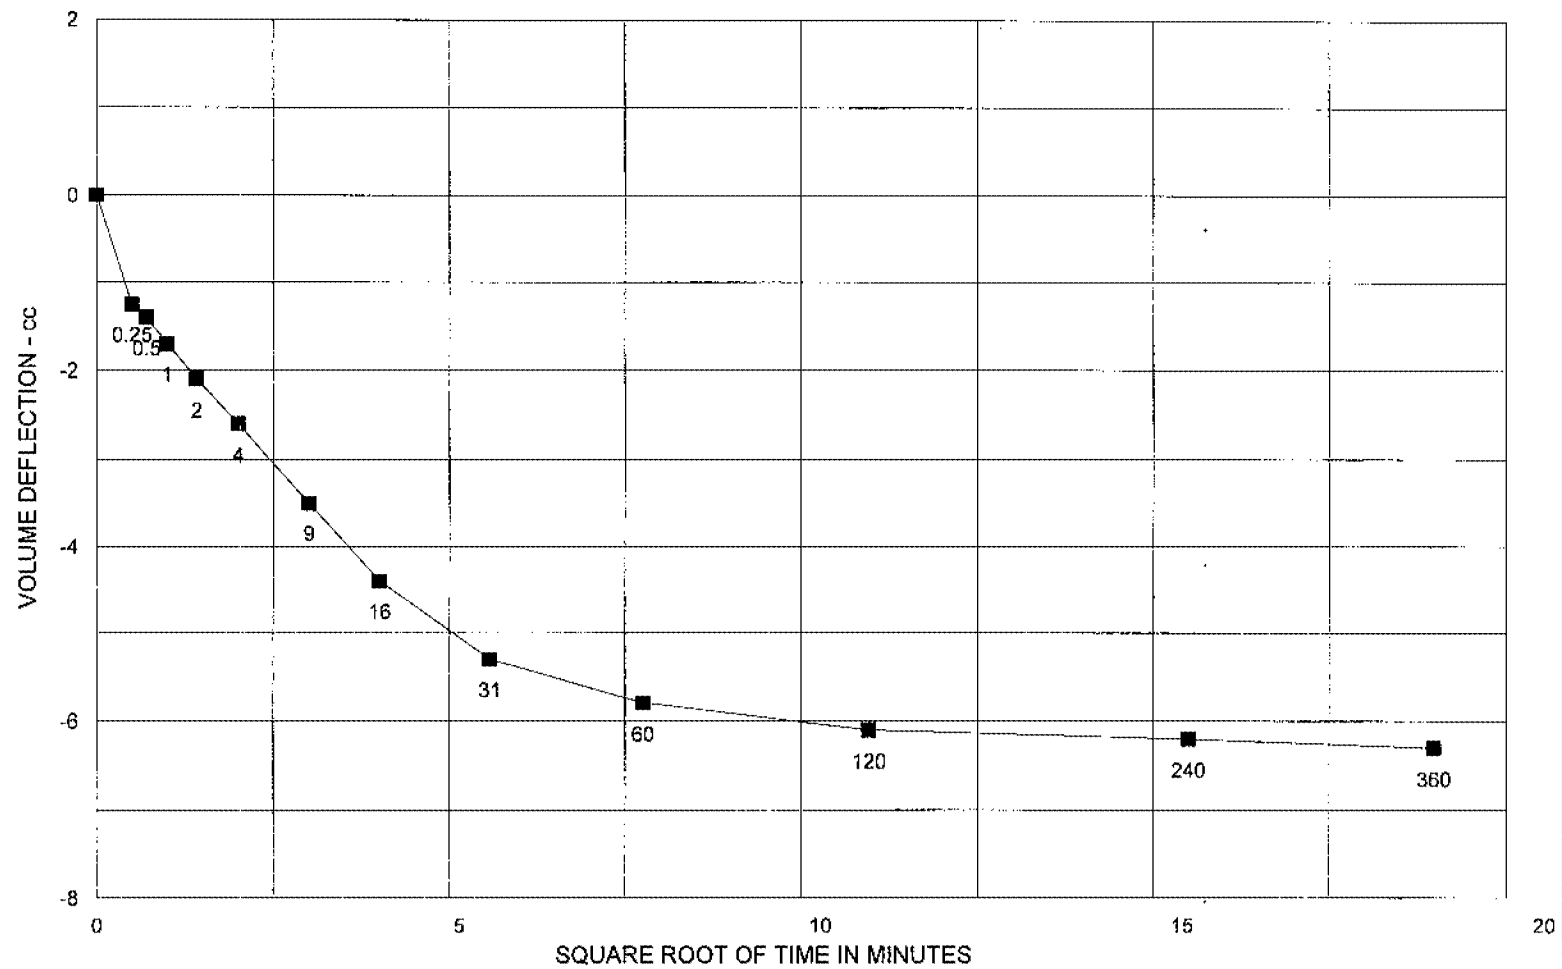

■ Time in Minutes

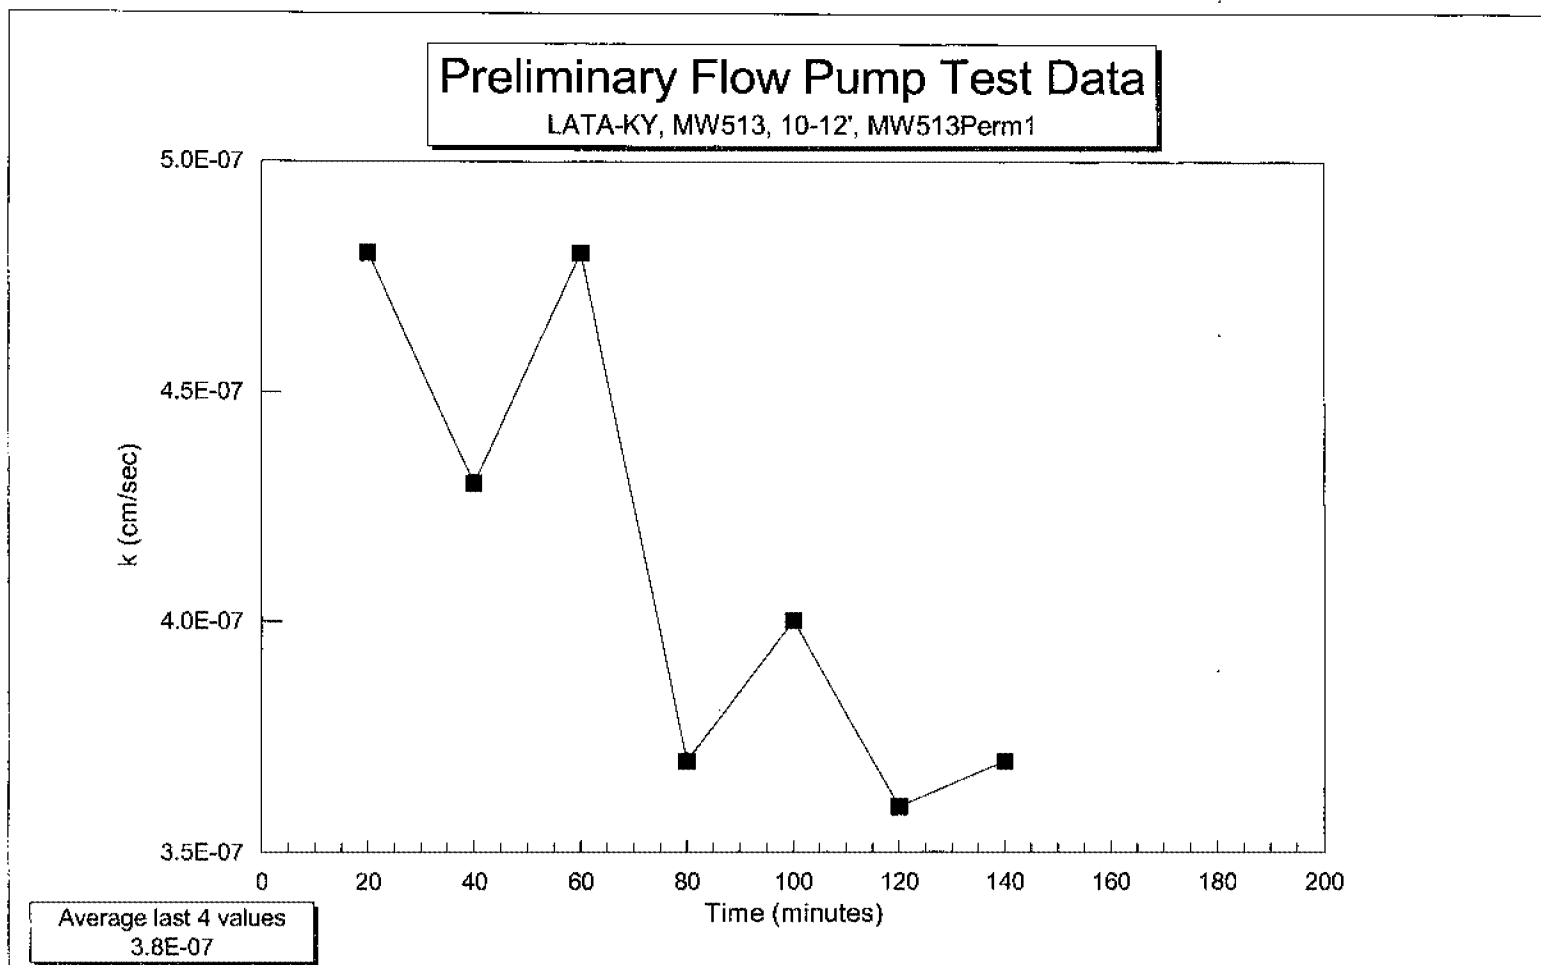

Data Entered By: DPM
Data Checked By: DPM
File Name: LKFP5131

Date: 09/24/2012
Date Checked: 9/25/12



PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services-Ky

JOB NO. 2855-02

BORING NO.	MW513	SAMPLED	8/27/12 KD
DEPTH	20-21'	TEST STARTED	9/15/12 CAL
SAMPLE NO.	MW513Perm2	TEST FINISHED	9/29/12 CAL
PROJECT NO.	ERI12-SW-SWMU211A	CELL NUMBER	11P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	3299	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST
Wt. Soil + Moisture (g)	677.3	686.4
Wt. Wet Soil & Pan (g)	692.8	701.9
Wt. Dry Soil & Pan (g)	590.0	590.0
Wt. Lost Moisture (g)	102.8	112.0
Wt. of Pan Only (g)	15.5	15.5
Wt. of Dry Soil (g)	574.5	574.5
Moisture Content %	17.9	19.5
Wet Density PCF	133.0	146.4
Dry Density PCF	112.8	122.5

Init. Diameter (in)	2.830	(cm)	7.188
Init. Area (sq in)	6.290	(sq cm)	40.584
Init. Height (in)	3.085	(cm)	7.836
Vol. Bef. Consol. (cu ft)	0.01123		
Vol. After Consol. (cu ft)	0.01034		
Porosity %	38.24		

FLOW PUMP CALCULATIONS

Pump Setting	5
Velocity CM/Sec	3.29E-05
Q (cc/s)	1.05E-06
Height	3.051
Diameter	2.730
Pressure (psi)	5.490
Area after consol. (cm*cm)	37.769
Gradient	49.808
Permeability k (cm/s)	5.6E-10
Permeability k (m/s)	5.6E-12
Back Pressure (psi)	88.0
Cell Pressure (psi)	111.0
Ave. Effective Stress (psi)	20.255
Average temperature degree C:	23.4

Data entry by: MLM Date: 10/01/2012
 Checked by: cal Date: 10/02/12
 FileName: LKP05132



TRIAxAL COMPRESSION TEST DATA

CLIENT LATA Environmental Services-Ky

JOB NO. 2855-02

BORING NO.	MW513	SAMPLED	8/27/12 KD
DEPTH	20-21'	TEST STARTED	9/15/12 CAL
SAMPLE NO.	MW513Perm2	TEST FINISHED	9/29/12 CAL
PROJECT NO.	ERI12-SW-SWMU211A	SETUP NO.	11P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	.3299	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	4.7 13.7			
50.0	48.0	15.5 18.0	38.5 46.6	8.1	0.81
60.0	58.0	22.7 24.1	48.4 57.5	9.1	0.91
70.0	68.0	26.9 27.8	58.7 68.0	9.3	0.93
80.0	78.0	28.3 29.1	68.5 77.8	9.3	0.93
90.0	88.0	29.8 30.5	78.4 87.8	9.4	0.94
100.0		31.1 31.1	88.5 98.0	9.5	0.95

CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.50	0.00
0.25	0.50	2.60	-2.10
0.5	0.71	2.70	-2.20
1	1.00	2.80	-2.30
2	1.41	3.00	-2.50
4	2.00	3.20	-2.70
9	3.00	3.60	-3.10
16	4.00	3.90	-3.40
30	5.48	4.35	-3.85
60	7.75	5.05	-4.55
120	10.95	5.90	-5.40
240	15.49	7.10	-6.60
360	18.97	7.95	-7.45


Initial Height (in)	3.085	Init. Vol. (CC)	318.05
Height Change (in)	0.034	Vol. Change (CC)	40.85
Ht. After Cons. (in)	3.051	Cell Exp. (CC)	15.55
Initial Area (sq in)	6.290	Net Change (CC)	25.30
Area After Cons. (sq in)	5.854	Cons. Vol. (CC)	292.75

Data entry by: MLM Date: 10/01/2012
 Checked by: CM Date: 10/02/12
 FileName: LKP05132




CONSOLIDATION DATA

MW513, 20-21', MW513Perm2

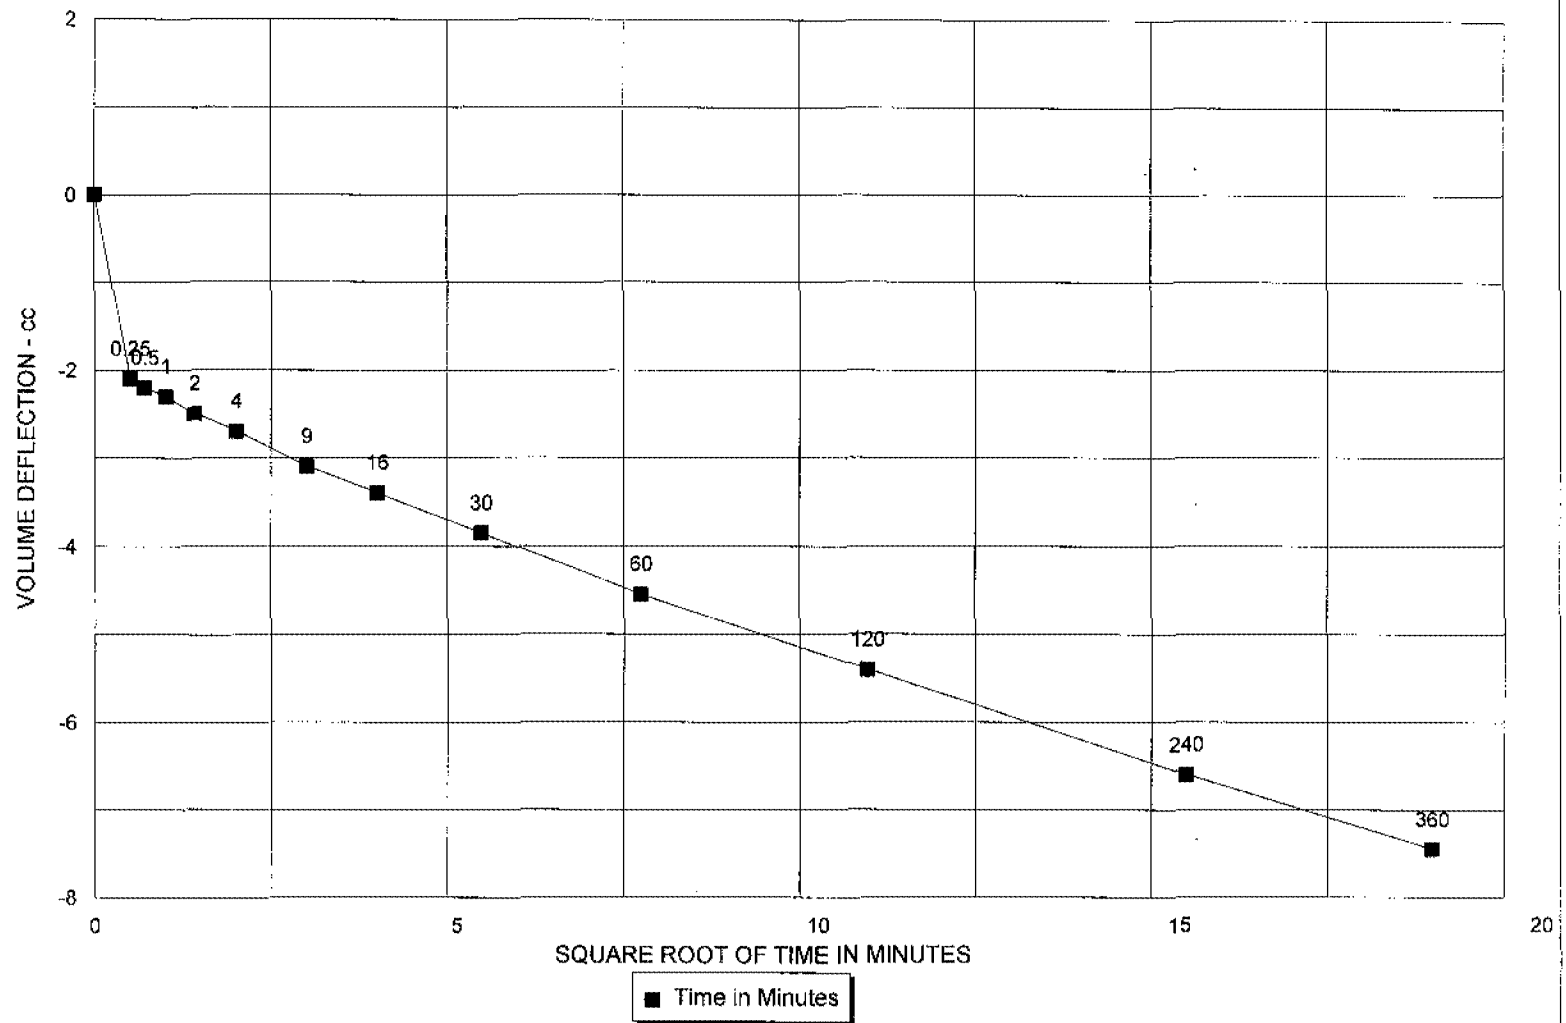

Preliminary Flow Pump Data

LATA-KY, MW513PERM2, 20-21'

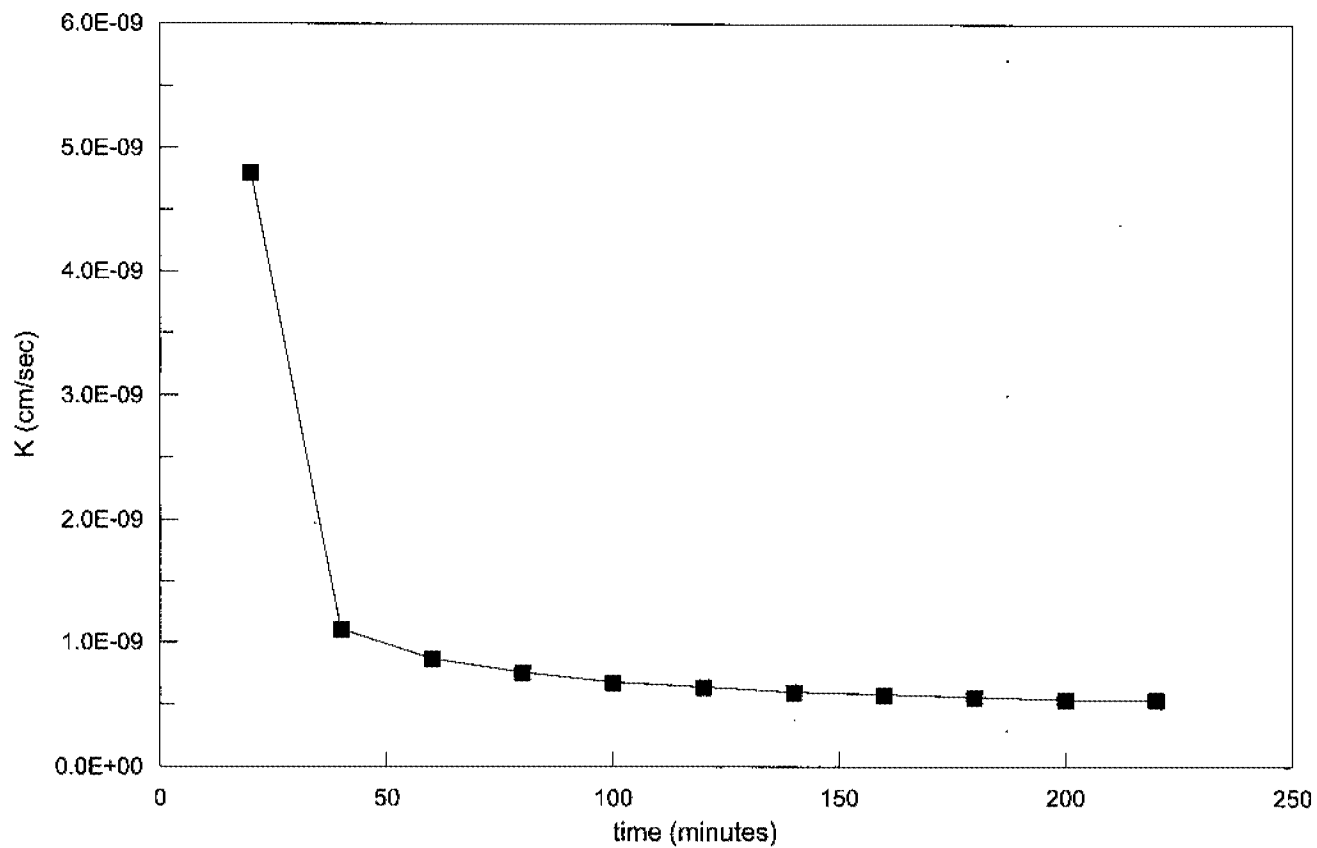

Average last 4 values
5.5E-10

Data Entered By:
Data Checked By:
File Name:

CAL
[Signature]
LKFP5132

Date: 9/29/2012
Date Checked 10/01/12



PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services - KY

JOB NO. 2855-02

BORING NO.	MW513	SAMPLED	08/23/12 KD
DEPTH	40-42'	TEST STARTED	09/15/12 CAL
SAMPLE NO.	MW513PERM3	TEST FINISHED	09/26/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	CELL NUMBER	1P
LOCATION	SW Plume RDS/ Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	5305	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	657.4	659.7	
Wt. Wet Soil & Pan (g)	664.1	666.5	
Wt. Dry Soil & Pan (g)	540.4	540.4	
Wt. Lost Moisture (g)	123.7	126.1	
Wt. of Pan Only (g)	6.7	6.7	
Wt. of Dry Soil (g)	533.7	533.7	
Moisture Content %	23.2	23.6	
Wet Density PCF	126.7	136.8	
Dry Density PCF	102.8	110.6	
Init. Diameter (in)	2.857	(cm)	7.257
Init. Area (sq in)	6.411	(sq cm)	41.362
Init. Height (in)	3.084	(cm)	7.833
Vol. Bef. Consol. (cu ft)	0.01144		
Vol. After Consol. (cu ft)	0.01064		
Porosity %	41.86		

FLOW PUMP CALCULATIONS

Pump Setting (gear number)	11
Percentage of Pump setting	100
Q (cc/s)	5.71E-05
Height	3.057
Diameter	2.767
Pressure (psi)	0.850
Area after consol. (cm*cm)	38.786
Gradient	7.697
Permeability k (cm/s)	1.9E-07
Permeability k (m/s)	1.9E-09
Back Pressure (psi)	48.0
Cell Pressure (psi)	84.8
Ave. Effective Stress (psi)	36.375
Average temperature degree C:	22.5

Data entry by: DAW Date: 09/27/2012
 Checked by: CA Date: 9/27/2012
 FileName: LKP05133



TRIAXIAL COMPRESSION TEST DATA

CLIENT LATA Environmental Services - KY

JOB NO. 2855-02

BORING NO.	MW513	SAMPLED	08/23/12 KD
DEPTH	40-42'	TEST STARTED	09/15/12 CAL
SAMPLE NO.	MW513PERM3	TEST FINISHED	09/26/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211A	SETUP NO.	1P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	5305	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	4.2	15.6		
50.0	48.0	20.9	24.6	38.8	45.3 6.5 0.65
60.0		24.3	25.5	48.9	58.7 9.8 0.98

CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.10	0.00
0.25	0.50	4.95	-4.85
0.5	0.71	5.20	-5.10
1	1.00	5.60	-5.50
2	1.41	6.20	-6.10
4	2.00	7.00	-6.90
9	3.00	8.40	-8.30
16	4.00	9.60	-9.50
30	5.48	10.70	-10.60
64	8.00	11.50	-11.40
120	10.95	11.85	-11.75
240	15.49	12.10	-12.00
360	18.97	12.20	-12.10


Initial Height (in)	3.084	Init. Vol. (CC)	324.04
Height Change (in)	0.027	Vol. Change (CC)	36.40
Ht. After Cons. (in)	3.057	Cell Exp. (CC)	13.57
Initial Area (sq in)	6.411	Net Change (CC)	22.83
Area After Cons. (sq in)	6.012	Cons. Vol. (CC)	301.22


Data entry by: DAW Date: 09/27/2012
 Checked by: CA Date: 9/27/2012
 FileName: LKP05133



CONSOLIDATION DATA

MW513, 40-42', MW513PERM3

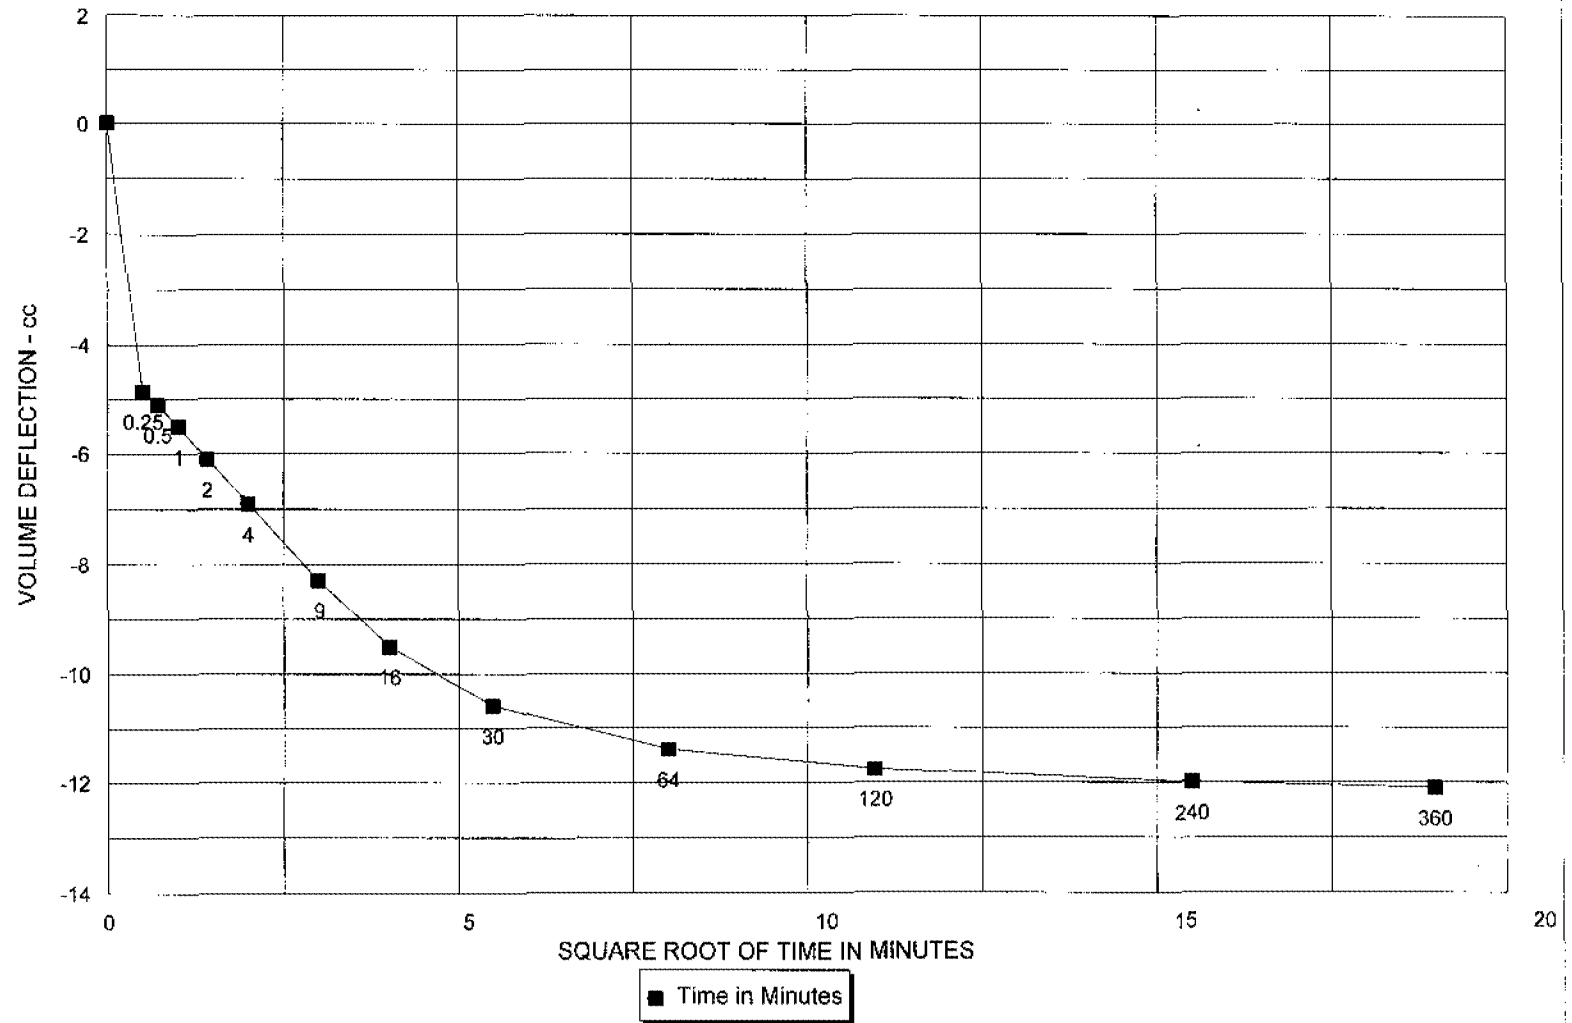

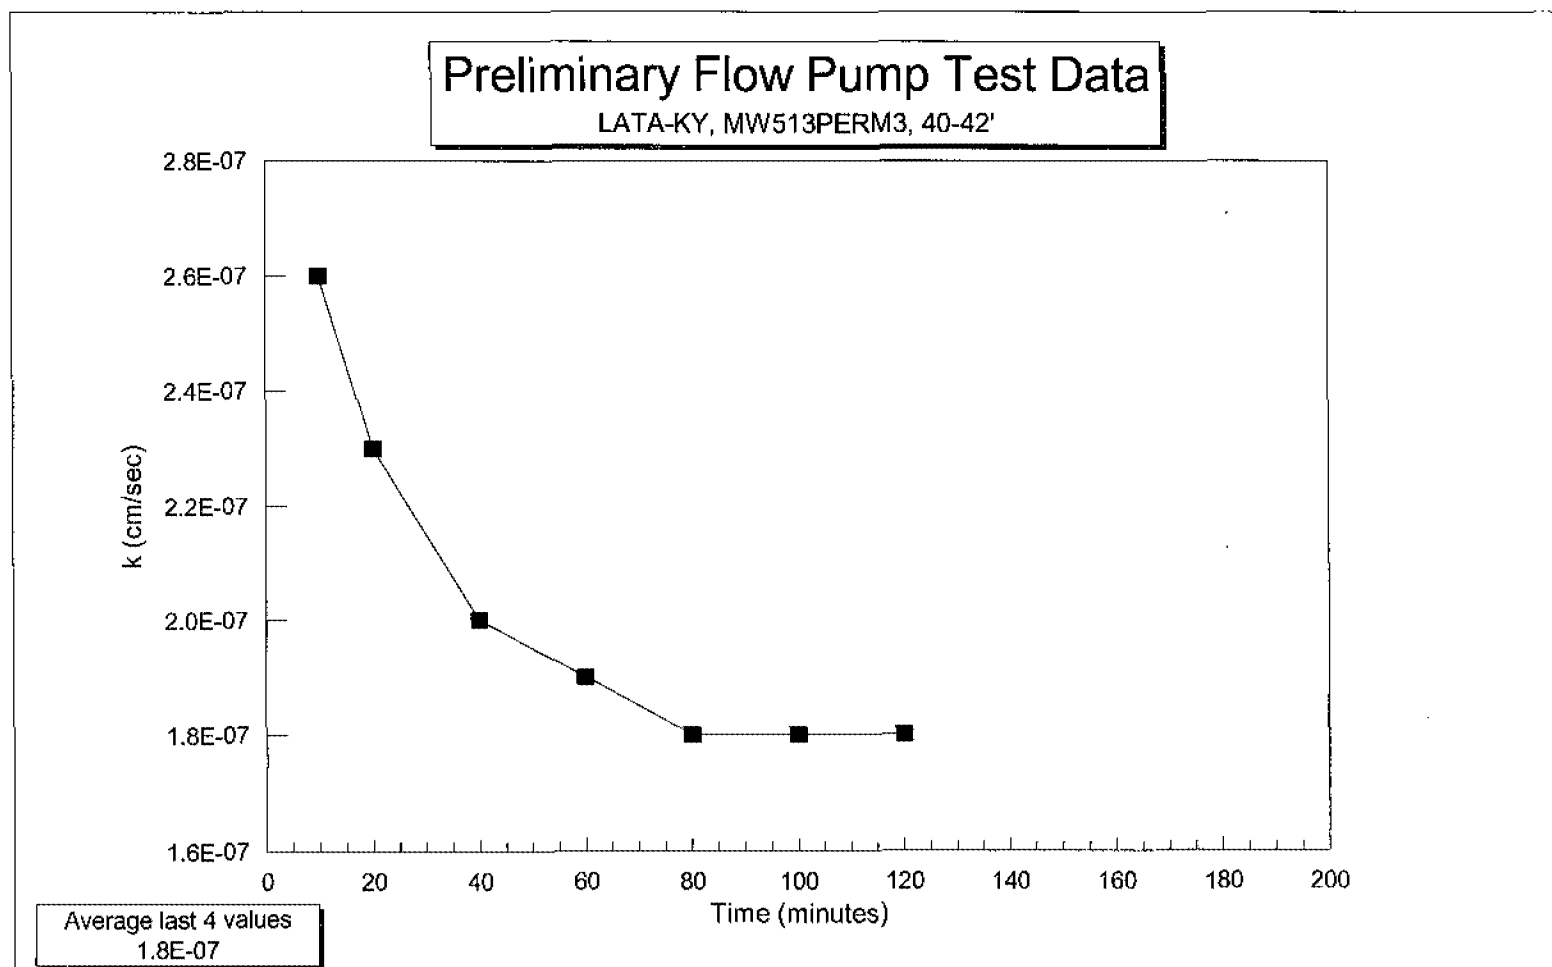

Data Entered By: CAL
Data Checked By: cal
File Name: LKFP5133

Date: 9/26/2012
Date Checked: 9/27/2012



Grain Size Analysis

ASTM D422

Advanced Terra Testing

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-06

BORING NO. 211-B-007
DEPTH 8.0-12.0'
SAMPLE NO. 211B007GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/16/12 KD
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No


Wt. Wet Soil & Pan (g) 185.05
Wt. Dry Soil & Pan (g) 182.81
Wt. Lost Moisture (g) 2.24
Wt. of Pan Only (g) 6.53
Wt. of Dry Soil (g) 176.28
Moisture Content % 1.3


Wt. Total Sample Wet (g) 973.66
Weight of + #10 Before Washing (g) 0.00
Weight of + #10 After Washing (g) 0.00
Weight of - #10 Wet (g) 973.66
Weight of - #10 Dry (g) 961.44
Wt. Total Sample Dry (g) 961.44

Wt. Hydrom. Sample Wet (g) 66.01
Wt. Hydrom. Sample Dry (g) 65.18

Calc. Wt. "W" (g) 65.18
Calc. Mass + #10 0.00

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	0.00	0.00	0.00	0.0	100.0
#10	0.00	0.00	0.00	0.00	0.0	100.0
#20	3.18	3.33	0.15	0.15	0.2	99.8
#40	3.02	3.30	0.29	0.44	0.7	99.3
#60	3.12	4.59	1.47	1.91	2.9	97.1
#100	3.17	6.77	3.60	5.52	8.5	91.5
#200	3.02	5.61	2.59	8.11	12.4	87.6

Data entered by: MLM
Data checked by: 
FileName: LKHY07Z1

Date: 11/12/2012
Date: 



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-06


BORING NO. 211-B-007
DEPTH 8.0-12.0'
SAMPLE NO. 211B007GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/16/12 KD
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	22.6
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01323
Value of "alpha"	1.00	Wt. Dry Sample "W"	65.178
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	56.00	51.00	78.2	78.2	7.11	0.0499
1.0	52.00	47.00	72.1	72.1	7.76	0.0369
2.0	47.00	42.00	64.4	64.4	8.58	0.0274
5.0	37.00	32.00	49.1	49.1	10.22	0.0189
15.0	27.00	22.00	33.8	33.8	11.86	0.0118
30.0	23.00	18.00	27.6	27.6	12.52	0.0085
60.0	19.75	14.75	22.6	22.6	13.05	0.0062
120.0	18.00	13.00	19.9	19.9	13.34	0.0044
250.0	17.00	12.00	18.4	18.4	13.50	0.0031
1440.0	16.00	11.00	16.9	16.9	13.67	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: 
FileName: LKHY07Z1

Date: 11/12/2012
Date: 11/12/12



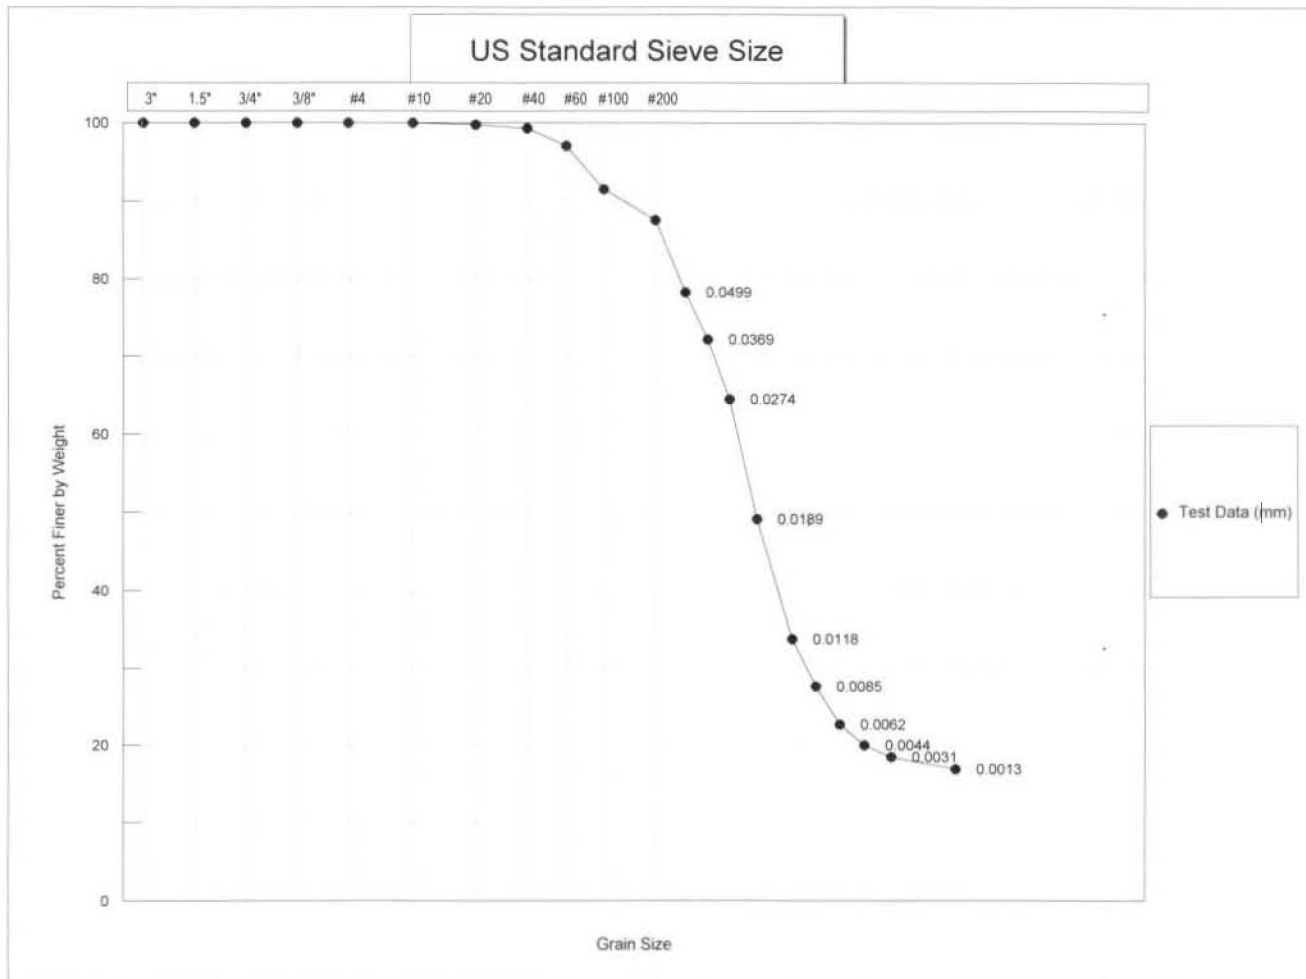

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

USCS

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

WENTWORTH

Client: LATA Kentucky

Boring No.: 211-B-007

Sample No.: 211B007GRNSZ1

Job Number: 2855-06

Depth: 8.0-12.0'

Classification:

Classification Not Performed

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-06

BORING NO. 211-B-007
DEPTH 27.5-31.5
SAMPLE NO. 211B007GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/16/12 KD
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No


Wt. Wet Soil & Pan (g) 113.21
Wt. Dry Soil & Pan (g) 111.93
Wt. Lost Moisture (g) 1.28
Wt. of Pan Only (g) 8.34
Wt. of Dry Soil (g) 103.59
Moisture Content % 1.2

Wt. Total Sample Wet (g) 863.29
Weight of + #10 Before Washing (g) 2.64
Weight of + #10 After Washing (g) 2.49
Weight of - #10 Wet (g) 860.65
Weight of - #10 Dry (g) 850.29
Wt. Total Sample Dry (g) 852.78

Wt. Hydrom. Sample Wet (g) 67.71
Wt. Hydrom. Sample Dry (g) 66.89

Calc. Wt. "W" (g) 67.08
Calc. Mass + #10 0.20

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	1.23	1.23	1.23	0.1	99.9
#10	0.00	1.26	1.26	2.49	0.3	99.7
#20	3.02	3.24	0.22	0.22	0.6	99.4
#40	3.10	4.19	1.09	1.32	2.3	97.7
#60	3.00	7.60	4.60	5.92	9.1	90.9
#100	3.07	11.15	8.08	13.99	21.1	78.9
#200	3.21	12.13	8.92	22.92	34.5	65.5

Data entered by: MLM
Data checked by: 
FileName: LKHY07Z2

Date: 11/12/2012
Date: 11/12/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-06


BORING NO. 211-B-007
DEPTH 27.5-31.5
SAMPLE NO. 211B007GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/16/12 KD
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	22.6
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01323
Value of "alpha"	1.00	Wt. Dry Sample "W"	67.083
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	45.00	40.00	59.6	59.6	8.91	0.0559
1.0	42.00	37.00	55.2	55.2	9.40	0.0406
2.0	39.75	34.75	51.8	51.8	9.77	0.0292
5.0	36.50	31.50	47.0	47.0	10.30	0.0190
15.0	33.00	28.00	41.7	41.7	10.88	0.0113
30.0	30.50	25.50	38.0	38.0	11.29	0.0081
60.0	28.50	23.50	35.0	35.0	11.62	0.0058
120.0	26.50	21.50	32.0	32.0	11.94	0.0042
250.0	25.00	20.00	29.8	29.8	12.19	0.0029
1440.0	22.00	17.00	25.3	25.3	12.68	0.0012

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: 
FileName: LKHY07Z2

Date: 11/12/2012
Date: 11/12/12



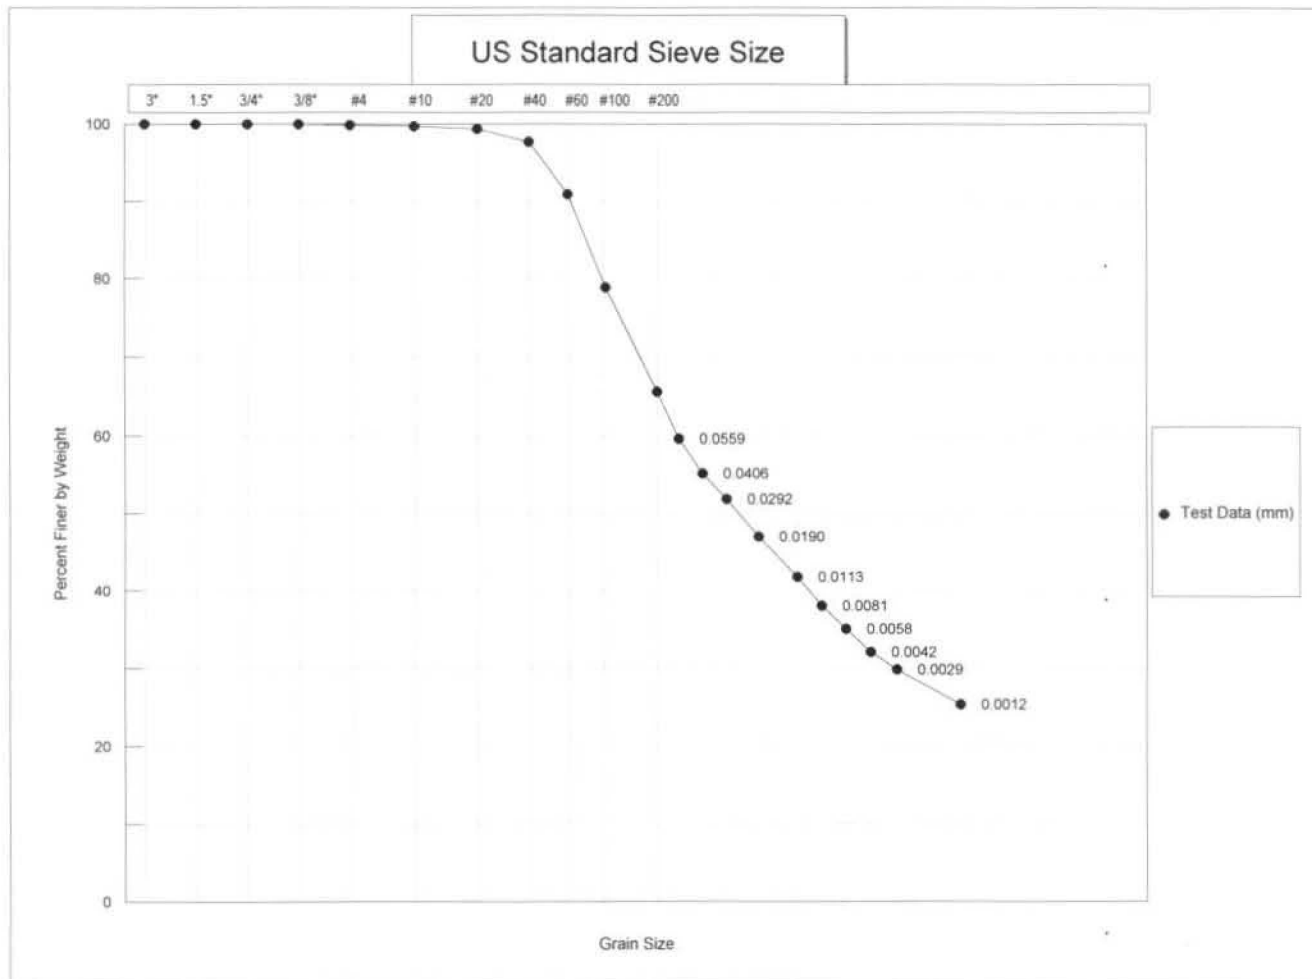

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL				SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky
 Job Number: 2855-06
 Classification:

Boring No.: 211-B-007
 Depth: 27.5-31.5

Sample No.: 211B007GRNSZ2

Classification Not Performed

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-06

BORING NO. 211-B-007
DEPTH 42.5-44.0
SAMPLE NO. 211B007GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/16/12 KD
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No


Wt. Wet Soil & Pan (g) 108.24
Wt. Dry Soil & Pan (g) 107.11
Wt. Lost Moisture (g) 1.13
Wt. of Pan Only (g) 8.21
Wt. of Dry Soil (g) 98.90
Moisture Content % 1.1


Wt. Total Sample
Wet (g) 890.19
Weight of + #10
Before Washing (g) 476.93
Weight of + #10
After Washing (g) 463.85
Weight of - #10
Wet (g) 413.26
Weight of - #10
Dry (g) 421.52
Wt. Total Sample
Dry (g) 885.37

Wt. Hydrom. Sample Wet (g) 67.25
Wt. Hydrom. Sample Dry (g) 66.49

Calc. Wt. "W" (g) 139.65
Calc. Mass + #10 73.16

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	19.48	19.48	19.48	2.2	97.8
3/8"	0.00	139.98	139.98	159.46	18.0	82.0
#4	0.00	167.21	167.21	326.67	36.9	63.1
#10	0.00	137.18	137.18	463.85	52.4	47.6
#20	3.25	15.75	12.50	12.50	61.3	38.7
#40	3.08	14.50	11.42	23.93	69.5	30.5
#60	3.29	14.99	11.70	35.62	77.9	22.1
#100	3.12	10.27	7.16	42.78	83.0	17.0
#200	2.98	6.45	3.47	46.25	85.5	14.5

Data entered by: MLM
Data checked by: 
FileName: LKHY07Z3

Date: 11/12/2012
Date: 



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-06

BORING NO. 211-B-007
DEPTH 42.5-44.0
SAMPLE NO. 211B007GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/16/12 KD
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No


Hydrometer #	ASTM 152 H	Temp., Deg. C	22.6
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01323
Value of "alpha"	1.00	Wt. Dry Sample "W"	139.649
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		

T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	25.00	20.00	14.3	14.3	12.19	0.0653
1.0	24.00	19.00	13.6	13.6	12.35	0.0465
2.0	23.00	18.00	12.9	12.9	12.52	0.0331
5.0	23.00	18.00	12.9	12.9	12.52	0.0209
15.0	22.00	17.00	12.2	12.2	12.68	0.0122
30.0	21.00	16.00	11.5	11.5	12.85	0.0087
60.0	20.25	15.25	10.9	10.9	12.97	0.0062
120.0	19.50	14.50	10.4	10.4	13.09	0.0044
250.0	19.00	14.00	10.0	10.0	13.17	0.0030
1442.0	19.00	14.00	10.0	10.0	13.17	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM Date: 11/12/2012
Data checked by: Date: 11/12/12
FileName: LKHY07Z3



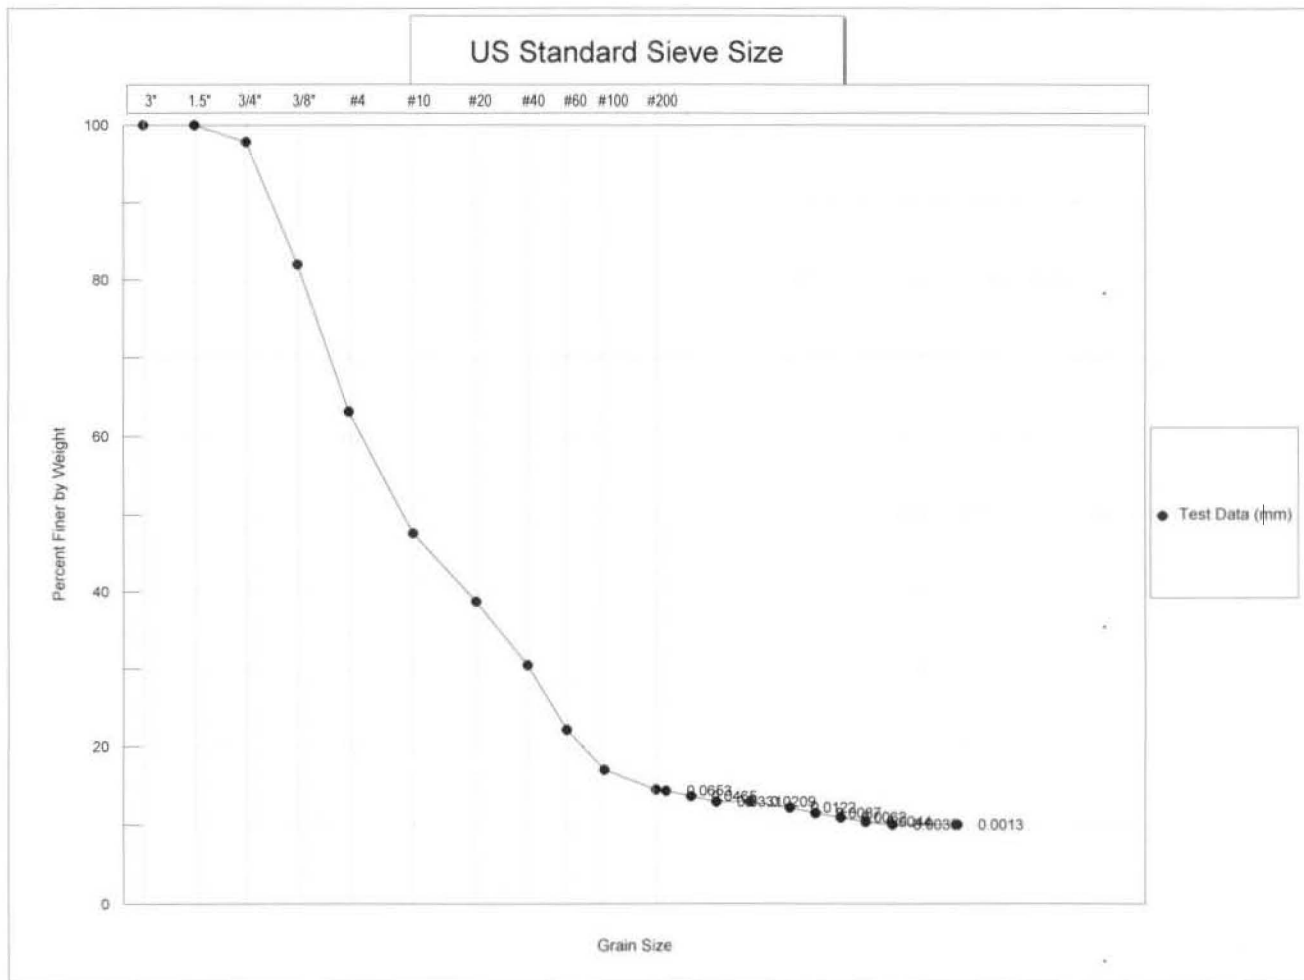

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL			SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRAN	COARSE	MED	FINE	

USCS

WENTWORTH

Client: LATA Kentucky Boring No.: 211-B-007
 Job Number: 2855-06 Depth: 42.5-44.0
 Classification: **Classification Not Performed**

Sample No.: 211B007GRNSZ3

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-004
DEPTH 5-7.5'
SAMPLE NO. 211B004GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/11/12 KD
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 33.59
Wt. Dry Soil & Pan (g) 33.24
Wt. Lost Moisture (g) 0.35
Wt. of Pan Only (g) 3.04
Wt. of Dry Soil (g) 30.20
Moisture Content % 1.2

Wt. Total Sample Wet (g) 1085.85
Weight of + #10 Before Washing (g) 2.34
Weight of + #10 After Washing (g) 1.85
Weight of - #10 Wet (g) 1083.51
Weight of - #10 Dry (g) 1071.58
Wt. Total Sample Dry (g) 1073.43

Wt. Hydrom. Sample Wet (g) 70.23
Wt. Hydrom. Sample Dry (g) 69.42

Calc. Wt. "W" (g) 69.54
Calc. Mass + #10 0.12

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	0.83	0.83	0.83	0.1	99.9
#10	0.00	1.02	1.02	1.85	0.2	99.8
#20	3.00	3.26	0.25	0.25	0.5	99.5
#40	3.00	3.32	0.31	0.56	1.0	99.0
#60	3.08	3.98	0.91	1.47	2.3	97.7
#100	2.97	4.73	1.76	3.24	4.8	95.2
#200	3.08	4.22	1.14	4.38	6.5	93.5

Data entered by: MLM
Data checked by: SKL
FileName: LKHY04Z1

Date: 11/12/2012
Date: 11/12/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-004
DEPTH 5-7.5'
SAMPLE NO. 211B004GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical


SAMPLED 10/11/12 KD
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

Hydrometer # ASTM 152 H
Sp. Gr. of Soil 2.65
Value of "alpha" 1.00
Deflocculant Sodium Hexametaphosphate
Defloc. Corr'n 5.0
Meniscus Corr'n 0.0

Temp., Deg. C 22.7
Temp. Coef. K 0.01322
Wt. Dry Sample "W" 69.543
% of Total Sample 100.0


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	58.75	53.75	77.3	77.3	6.66	0.0341
2.0	52.75	47.75	68.7	68.7	7.64	0.0258
5.0	42.00	37.00	53.2	53.2	9.40	0.0181
15.0	30.75	25.75	37.0	37.0	11.25	0.0114
30.0	26.00	21.00	30.2	30.2	12.03	0.0084
60.0	22.00	17.00	24.4	24.4	12.68	0.0061
120.0	21.00	16.00	23.0	23.0	12.85	0.0043
250.0	19.00	14.00	20.1	20.1	13.17	0.0030
1440.0	17.00	12.00	17.3	17.3	13.50	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: 
FileName: LKHY04Z1

Date: 11/12/2012
Date: 11/12/12



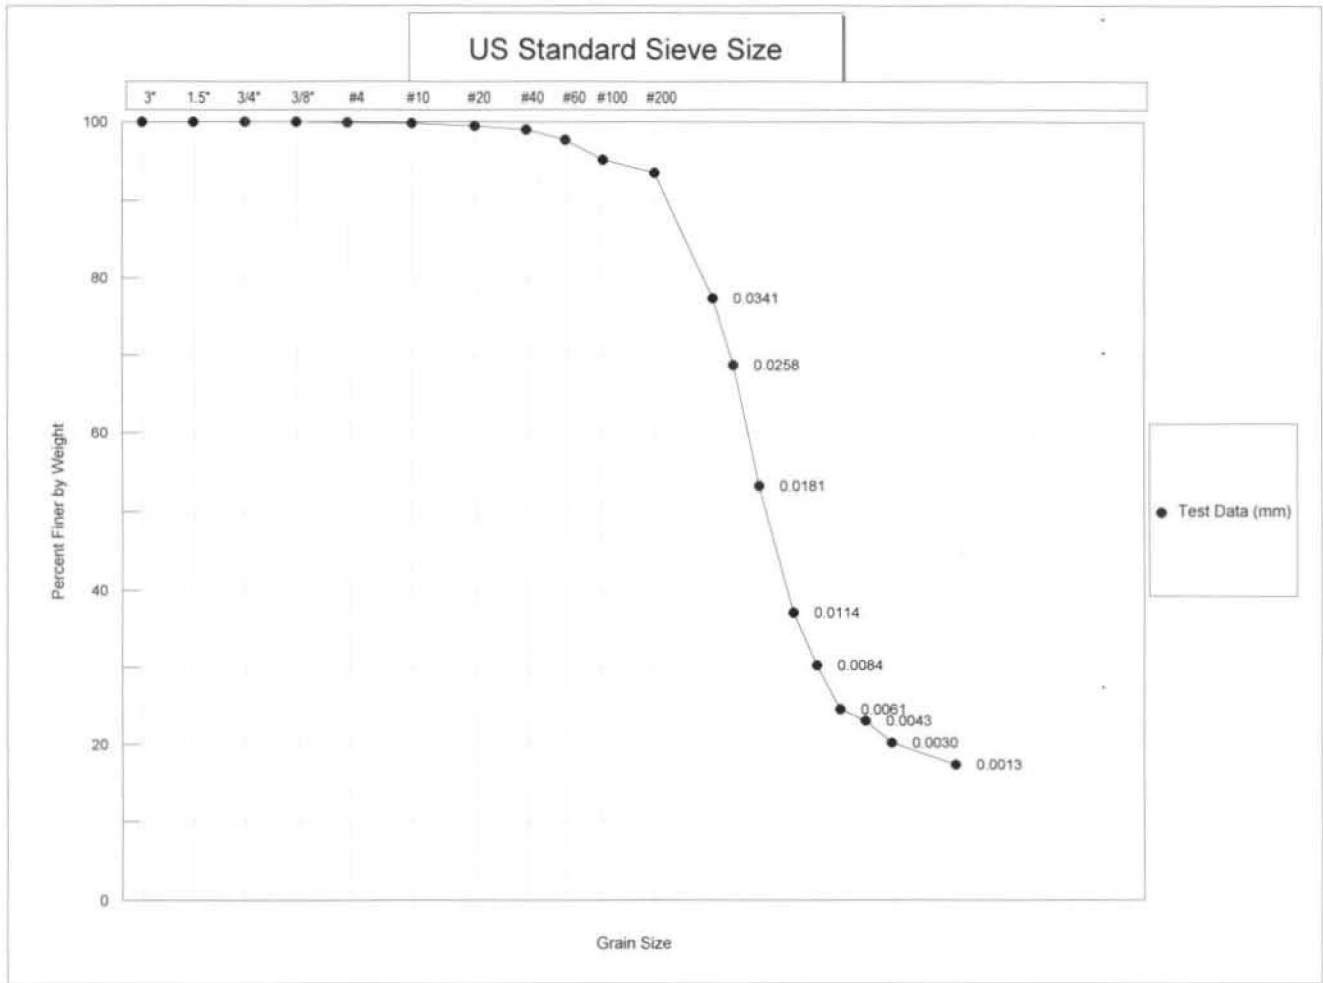

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL				SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky Boring No.: 211-B-004 Sample No.: 211B004GRNSZ1
Job Number: 2855-6 Depth: 5-7.5'
Classification: **Classification Not Performed**

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-004
DEPTH 21.1-23.5'
SAMPLE NO. 211B004GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/11/12 KD
DATE TESTED 11/5/12 SKL
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes


NATURAL No

Wt. Wet Soil & Pan (g) 74.00
Wt. Dry Soil & Pan (g) 73.31
Wt. Lost Moisture (g) 0.69
Wt. of Pan Only (g) 3.13
Wt. of Dry Soil (g) 70.18
Moisture Content % 1.0

Wt. Total Sample Wet (g) 1098.78
Weight of + #10 Before Washing (g) 530.91
Weight of + #10 After Washing (g) 507.08
Weight of - #10 Wet (g) 567.87
Weight of - #10 Dry (g) 585.94
Wt. Total Sample Dry (g) 1093.02
Calc. Wt. "W" (g) 132.39
Calc. Mass + #10 61.42

Wt. Hydrom. Sample Wet (g) 71.67
Wt. Hydrom. Sample Dry (g) 70.97

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	13.47	13.47	13.47	1.2	98.8
3/8"	0.00	124.78	124.78	138.25	12.6	87.4
#4	0.00	202.57	202.57	340.82	31.2	68.8
#10	0.00	166.26	166.26	507.08	46.4	53.6
#20	3.05	16.65	13.59	13.59	56.7	43.3
#40	3.19	20.53	17.33	30.92	69.8	30.2
#60	2.99	13.21	10.22	41.14	77.5	22.5
#100	3.05	7.42	4.37	45.52	80.8	19.2
#200	3.24	6.24	3.00	48.51	83.0	17.0

Data entered by: MLM
Data checked by: 
FileName: LKHY04Z2

Date: 11/07/2012
Date: 11/7/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT	LATA Kentucky	JOB NO.	2855-6
BORING NO.	211-B-004	SAMPLED	10/11/12 KD
DEPTH	21.1-23.5'	DATE TESTED	11/5/12 SKL
SAMPLE NO.	211B004GRNSZ2	WASH SIEVE	Yes
SOIL DESCR.	ERI12-SW-SWMU211B	DRY SIEVE	No
LOCATION	SW Plume RDSI Geotechnical		
Hydrometer #	ASTM 152 H	Temp., Deg. C	22.7
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01322
Value of "alpha"	1.00	Wt. Dry Sample "W"	132.394
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Reading		100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
	Original	Corrected "R"				
0.0	--	--	--	--	--	--
0.5	25.00	20.00	15.1	15.1	12.19	0.0653
1.0	23.50	18.50	14.0	14.0	12.44	0.0466
2.0	23.00	18.00	13.6	13.6	12.52	0.0331
5.0	22.00	17.00	12.8	12.8	12.68	0.0210
15.0	19.50	14.50	11.0	11.0	13.09	0.0123
30.0	18.00	13.00	9.8	9.8	13.34	0.0088
60.0	17.00	12.00	9.1	9.1	13.50	0.0063
120.0	16.00	11.00	8.3	8.3	13.67	0.0045
250.0	15.50	10.50	7.9	7.9	13.75	0.0031
1440.0	15.00	10.00	7.6	7.6	13.83	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: MLM
FileName: LKHY04Z2

Date: 11/07/2012
Date: 11/7/12



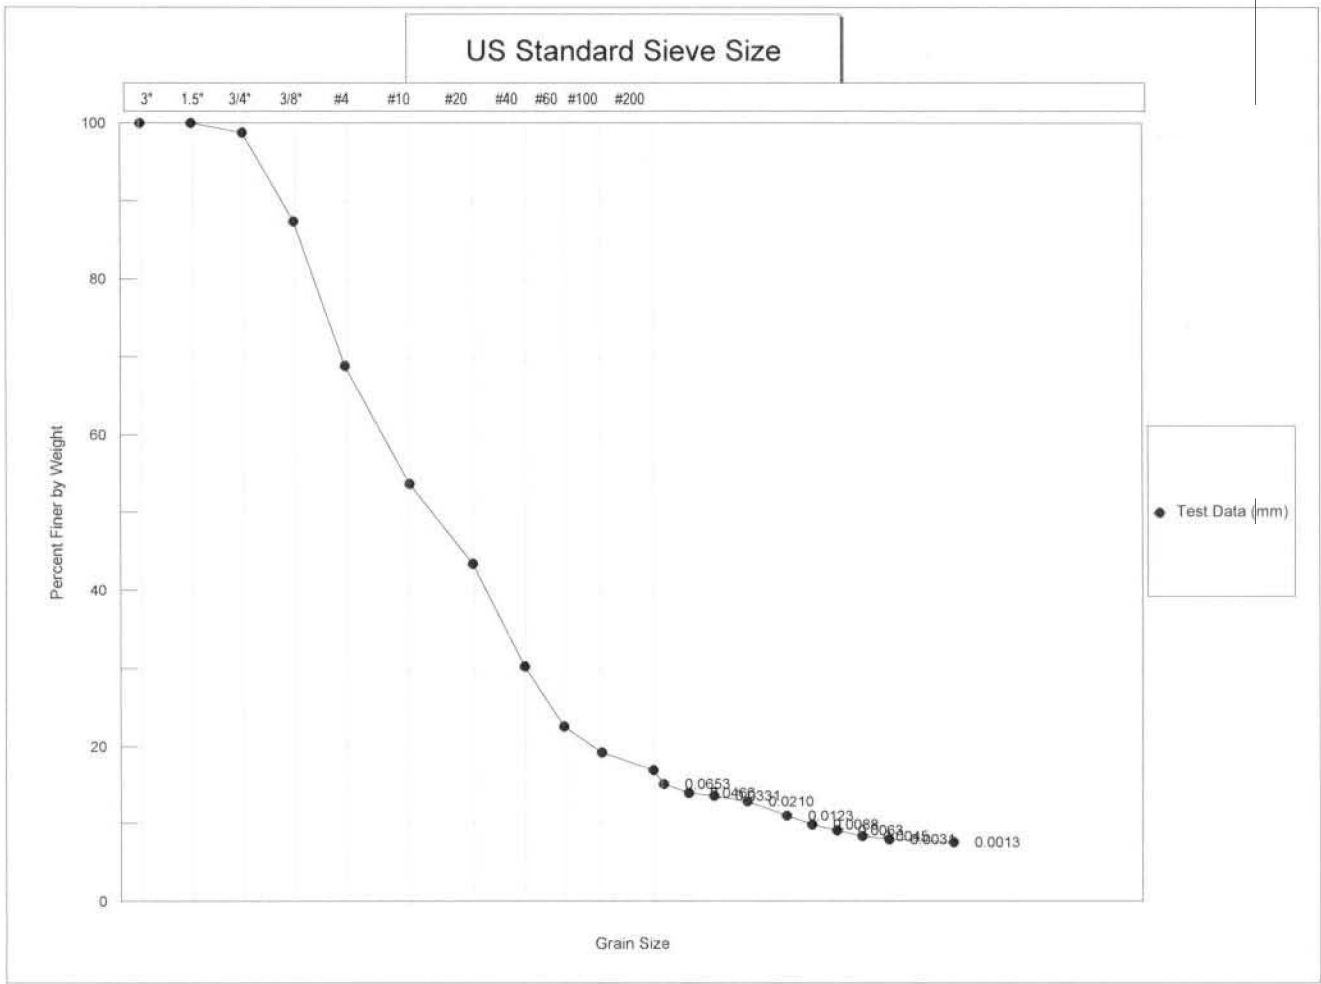

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky

Job Number: 2855-6

Classification:

Boring No.: 211-B-004

Depth: 21.1-23.5'

Classification Not Performed

Sample No.: 211B004GRNSZ2

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-004
DEPTH 36-38'
SAMPLE NO. 211B004GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/11/12 KD
DATE TESTED 11/5/12 SKL
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 78.44
Wt. Dry Soil & Pan (g) 77.30
Wt. Lost Moisture (g) 1.14
Wt. of Pan Only (g) 3.07
Wt. of Dry Soil (g) 74.23
Moisture Content % 1.5

Wt. Total Sample Wet (g) 1104.43
Weight of + #10 Before Washing (g) 3.63
Weight of + #10 After Washing (g) 3.41
Weight of - #10 Wet (g) 1100.80
Weight of - #10 Dry (g) 1084.37
Wt. Total Sample Dry (g) 1087.78

Wt. Hydrom. Sample Wet (g) 62.93
Wt. Hydrom. Sample Dry (g) 61.98

Calc. Wt. "W" (g) 62.18
Calc. Mass + #10 0.19

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	1.45	1.45	1.45	0.1	99.9
#10	0.00	1.96	1.96	3.41	0.3	99.7
#20	2.99	3.32	0.33	0.33	0.8	99.2
#40	3.01	4.82	1.81	2.14	3.8	96.2
#60	3.10	7.97	4.87	7.01	11.6	88.4
#100	2.98	9.11	6.12	13.13	21.4	78.6
#200	2.97	7.89	4.91	18.04	29.3	70.7

Data entered by: MLM
Data checked by: SKL
FileName: LKHY04Z3

Date: 11/07/2012
Date: 11/7/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-004
DEPTH 36-38'
SAMPLE NO. 211B004GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/11/12 KD
DATE TESTED 11/5/12 SKL
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	22.7
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01322
Value of "alpha"	1.00	Wt. Dry Sample "W"	62.176
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Reading		100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
	Original	Corrected "R"				
0.0	--	--	--	--	--	--
0.5	47.00	42.00	67.6	67.6	8.58	0.0548
1.0	44.00	39.00	62.7	62.7	9.07	0.0398
2.0	42.00	37.00	59.5	59.5	9.40	0.0287
5.0	38.00	33.00	53.1	53.1	10.06	0.0187
15.0	31.50	26.50	42.6	42.6	11.12	0.0114
30.0	26.75	21.75	35.0	35.0	11.90	0.0083
60.0	24.00	19.00	30.6	30.6	12.35	0.0060
120.0	22.00	17.00	27.3	27.3	12.68	0.0043
250.0	20.00	15.00	24.1	24.1	13.01	0.0030
1440.0	17.00	12.00	19.3	19.3	13.50	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: _____
FileName: LKHY04Z3

Date: 11/07/2012
Date: _____



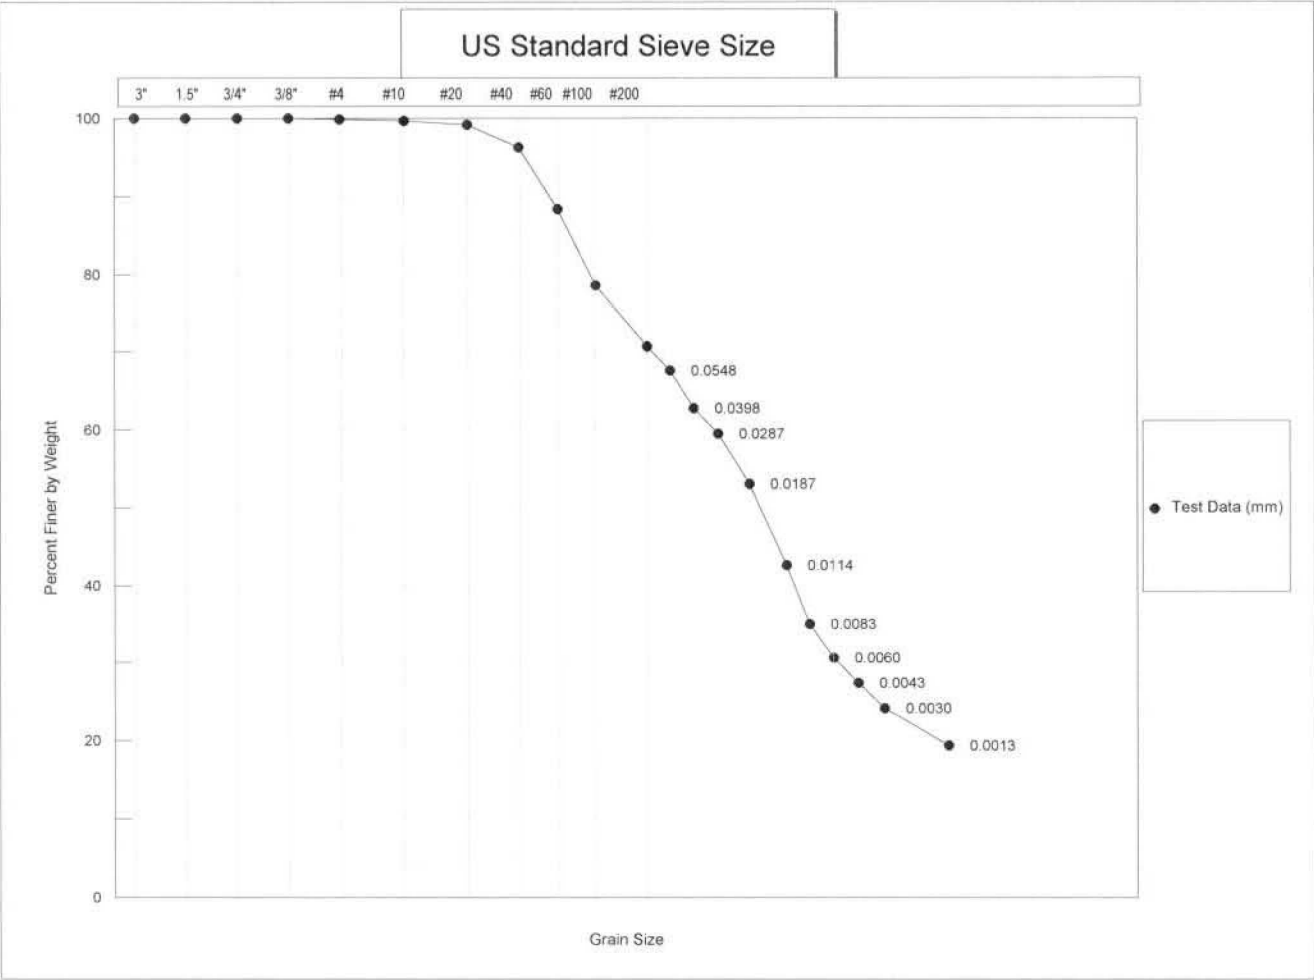

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky

Job Number: 2855-6

Classification:

Boring No.: 211-B-004

Depth: 36-38'

Classification Not Performed

Sample No.: 211B004GRNSZ3

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-001
DEPTH 8.0-10.0'
SAMPLE NO. 211B001GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/9/12 MK
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 36.85
Wt. Dry Soil & Pan (g) 36.27
Wt. Lost Moisture (g) 0.58
Wt. of Pan Only (g) 3.02
Wt. of Dry Soil (g) 33.25
Moisture Content % 1.7

Wt. Total Sample Wet (g) 103.70
Weight of + #10 Before Washing (g) 0.00
Weight of + #10 After Washing (g) 0.00
Weight of - #10 Wet (g) 103.70
Weight of - #10 Dry (g) 101.92
Wt. Total Sample Dry (g) 101.92

Wt. Hydrom. Sample Wet (g) 69.89
Wt. Hydrom. Sample Dry (g) 68.69

Calc. Wt. "W" (g) 68.69
Calc. Mass + #10 0.00

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	0.00	0.00	0.00	0.0	100.0
#10	0.00	0.00	0.00	0.00	0.0	100.0
#20	2.98	3.01	0.03	0.03	0.0	100.0
#40	3.13	3.33	0.20	0.24	0.3	99.7
#60	3.04	3.97	0.93	1.16	1.7	98.3
#100	2.98	4.62	1.64	2.80	4.1	95.9
#200	3.04	4.07	1.03	3.83	5.6	94.4

Data entered by: MLM
Data checked by: *[Signature]*
FileName: LKHY01Z1

Date: 11/12/2012
Date: 11/12/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-001
DEPTH 8.0-10.0'
SAMPLE NO. 211B001GRNSZ1
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical


SAMPLED 10/9/12 MK
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

Hydrometer # ASTM 152 H
Sp. Gr. of Soil 2.65
Value of "alpha" 1.00
Deflocculant Sodium Hexametaphosphate
Defloc. Corr'n 5.0
Meniscus Corr'n 0.0

Temp., Deg. C 22.7
Temp. Coef. K 0.01322
Wt. Dry Sample "W" 68.687
% of Total Sample 100.0


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	59.00	54.00	78.6	78.6	6.61	0.0340
2.0	54.00	49.00	71.3	71.3	7.43	0.0255
5.0	44.00	39.00	56.8	56.8	9.07	0.0178
15.0	32.50	27.50	40.0	40.0	10.96	0.0113
30.0	27.00	22.00	32.0	32.0	11.86	0.0083
60.0	24.00	19.00	27.7	27.7	12.35	0.0060
120.0	21.75	16.75	24.4	24.4	12.72	0.0043
250.0	20.00	15.00	21.8	21.8	13.01	0.0030
1440.0	18.00	13.00	18.9	18.9	13.34	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: 
FileName: LKHY01Z1

Date: 11/12/2012
Date: 11/12/12



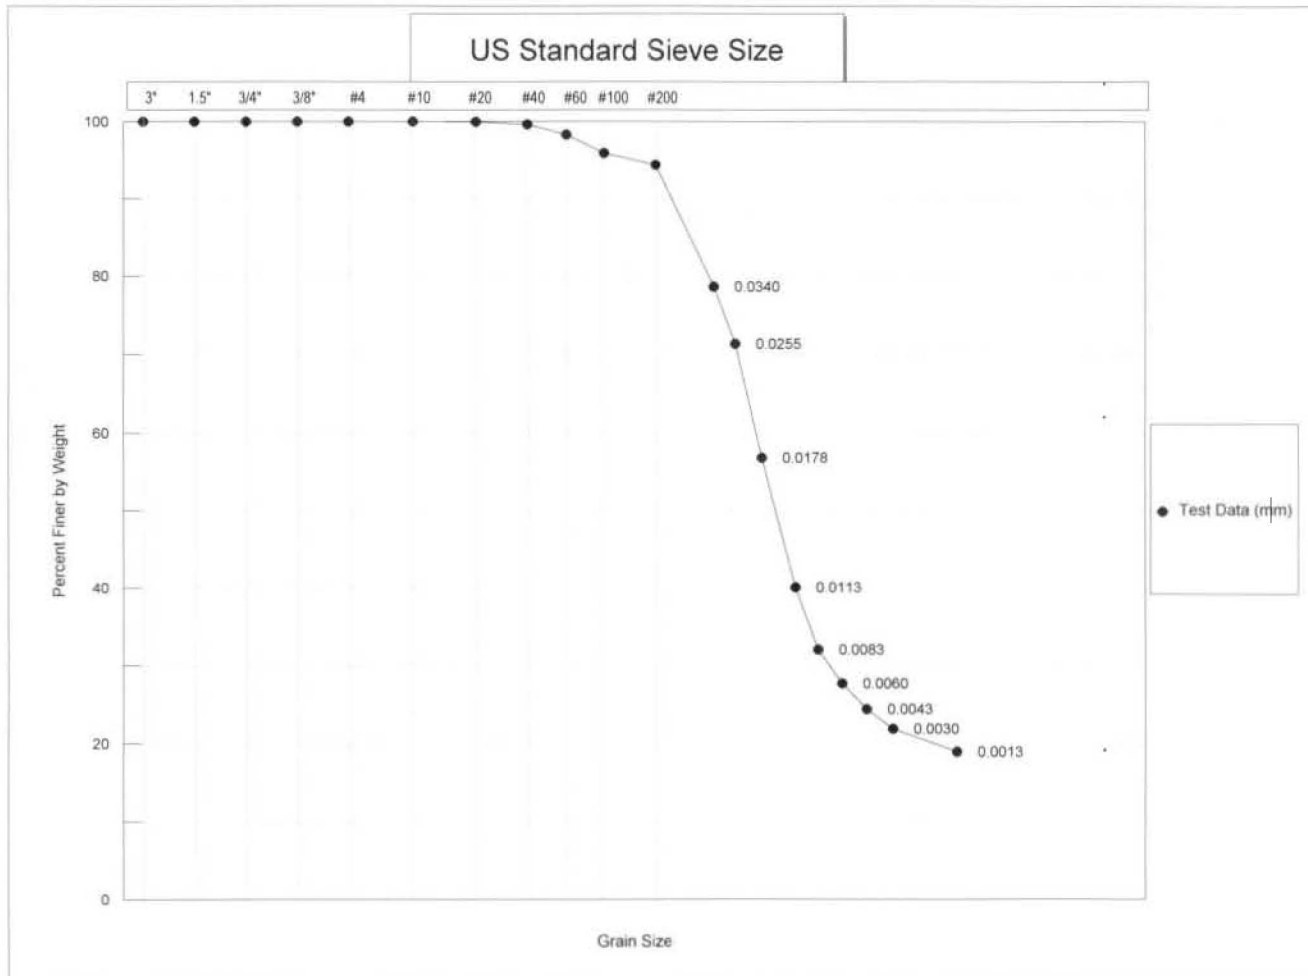

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL				SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USC\$
WENTWORTH

Client: LATA Kentucky Boring No.: 211-B-001 Sample No.: 211B001GRNSZ1
Job Number: 2855-6 Depth: 8.0-10.0'
Classification: **Classification Not Performed**

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-001
DEPTH 18.0-20.0'
SAMPLE NO. 211B001GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/9/12 MK
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No


Wt. Wet Soil & Pan (g) 35.10
Wt. Dry Soil & Pan (g) 34.56
Wt. Lost Moisture (g) 0.54
Wt. of Pan Only (g) 3.00
Wt. of Dry Soil (g) 31.56
Moisture Content % 1.7


Wt. Total Sample Wet (g) 1093.47
Weight of + #10 Before Washing (g) 545.18
Weight of + #10 After Washing (g) 493.40
Weight of - #10 Wet (g) 548.29
Weight of - #10 Dry (g) 589.98
Wt. Total Sample Dry (g) 1083.38

Wt. Hydrom. Sample Wet (g) 90.81
Wt. Hydrom. Sample Dry (g) 89.29

Calc. Wt. "W" (g) 163.96
Calc. Mass + #10 74.67

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	24.39	24.39	24.39	2.3	97.7
3/8"	0.00	170.78	170.78	195.17	18.0	82.0
#4	0.00	176.89	176.89	372.06	34.3	65.7
#10	0.00	121.34	121.34	493.40	45.5	54.5
#20	3.21	15.52	12.31	12.31	53.0	47.0
#40	3.04	18.65	15.60	27.91	62.6	37.4
#60	3.04	16.91	13.87	41.78	71.0	29.0
#100	3.03	8.86	5.83	47.61	74.6	25.4
#200	3.00	5.70	2.70	50.31	76.2	23.8

Data entered by: MLM
Data checked by: 
FileName: LKHY01Z2

Date: 11/12/2012
Date: 



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-001
DEPTH 18.0-20.0'
SAMPLE NO. 211B001GRNSZ2
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/9/12 MK
DATE TESTED 11/8/12 SKL
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	22.6
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01323
Value of "alpha"	1.00	Wt. Dry Sample "W"	163.957
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	--	--	--	--	--	--
1.0	42.75	37.75	23.0	23.0	9.28	0.0403
2.0	40.50	35.50	21.7	21.7	9.65	0.0291
5.0	38.00	33.00	20.1	20.1	10.06	0.0188
15.0	34.00	29.00	17.7	17.7	10.71	0.0112
30.0	32.00	27.00	16.5	16.5	11.04	0.0080
60.0	31.00	26.00	15.9	15.9	11.21	0.0057
120.0	29.50	24.50	14.9	14.9	11.45	0.0041
250.0	28.00	23.00	14.0	14.0	11.70	0.0029
1440.0	27.00	22.00	13.4	13.4	11.86	0.0012

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: [Signature]
FileName: LKHY01Z2

Date: 11/12/2012
Date: 11/12/12



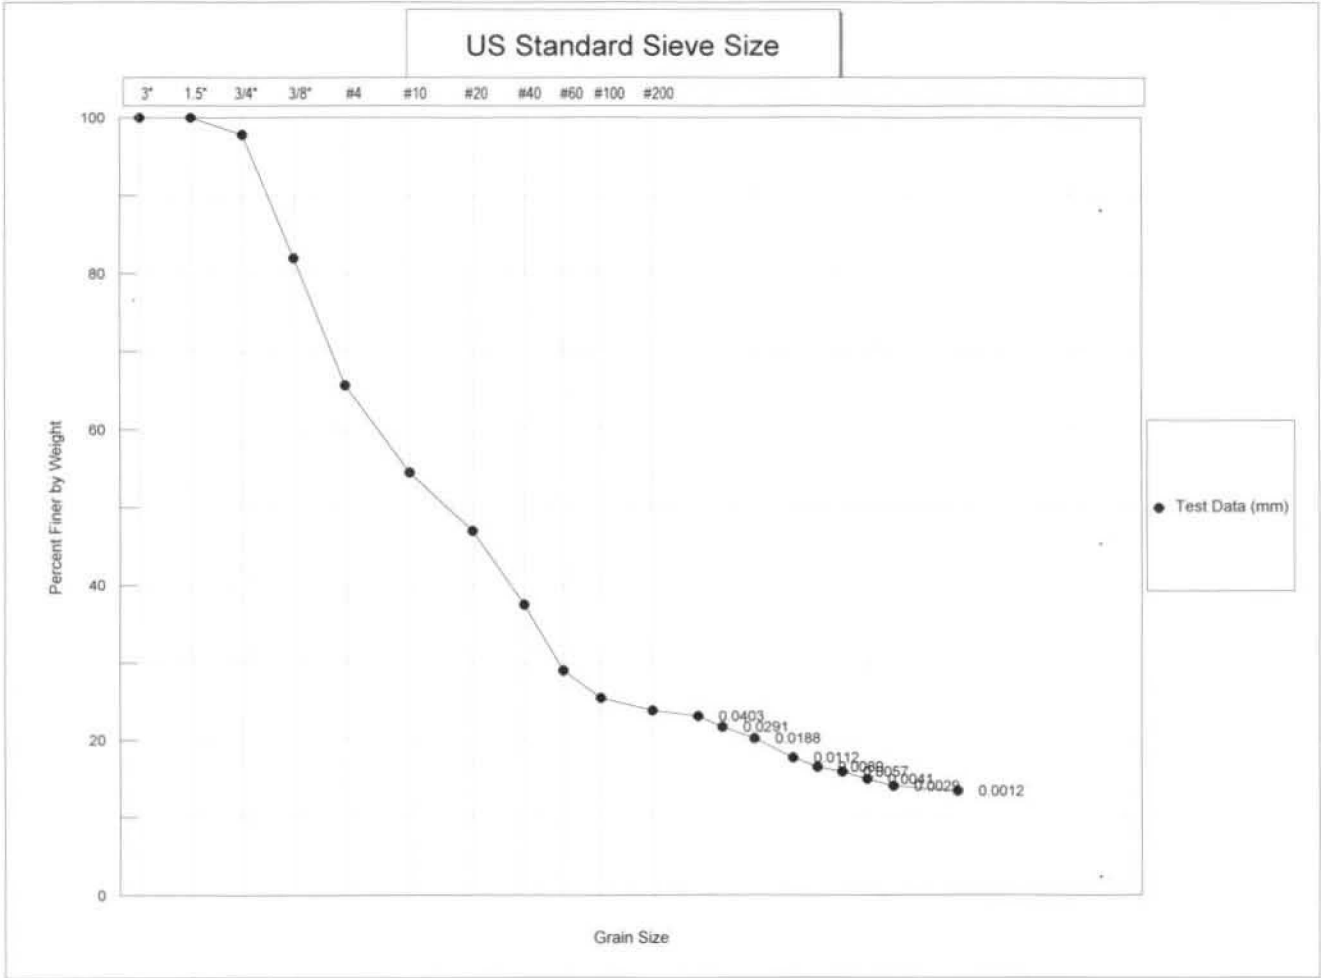

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES	PEBBLE GRAVEL			SAND			SILT	CLAY
TO BOULDERS	COARSE	MED	FINE	GRAN	COARSE	MED	FINE	

USCS

WENTWORTH

Client: LATA Kentucky

Boring No.: 211-B-001

Job Number: 2855-6

Depth: 18.0-20.0'

Classification: **Classification Not Performed**

Sample No.: 211B001GRNSZ2

MECHANICAL ANALYSIS - SIEVE TEST DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6

BORING NO. 211-B-001
DEPTH 38.0-40.0'
SAMPLE NO. 211B001GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/9/12 MK
DATE TESTED 11/5/12 SKL
WASH SIEVE Yes
DRY SIEVE No

MOISTURE DATA

WASH SIEVE ANALYSIS

HYGROSCOPIC Yes

NATURAL No

Wt. Wet Soil & Pan (g) 58.82
Wt. Dry Soil & Pan (g) 58.15
Wt. Lost Moisture (g) 0.67
Wt. of Pan Only (g) 3.07
Wt. of Dry Soil (g) 55.08
Moisture Content % 1.2

Wt. Total Sample
Wet (g) 1383.18
Weight of + #10
Before Washing (g) 18.17
Weight of + #10
After Washing (g) 16.14
Weight of - #10
Wet (g) 1365.01
Weight of - #10
Dry (g) 1350.61
Wt. Total Sample
Dry (g) 1366.75
Calc. Wt. "W" (g) 64.24
Calc. Mass + #10 0.76

Wt. Hydrom. Sample Wet (g) 64.25
Wt. Hydrom. Sample Dry (g) 63.48

Sieve Number (Size)	Pan Weight (g)	Indiv. Wt. + Pan (g)	Indiv. Wt. Retain.	Cum. Wt. Retain.	Cum. % Retain.	% Finer By Wt.
3"	0.00	0.00	0.00	0.00	0.0	100.0
1 1/2"	0.00	0.00	0.00	0.00	0.0	100.0
3/4"	0.00	0.00	0.00	0.00	0.0	100.0
3/8"	0.00	0.00	0.00	0.00	0.0	100.0
#4	0.00	7.63	7.63	7.63	0.6	99.4
#10	0.00	8.51	8.51	16.14	1.2	98.8
#20	3.08	3.85	0.77	0.77	2.4	97.6
#40	3.05	6.59	3.54	4.31	7.9	92.1
#60	3.02	9.23	6.21	10.52	17.6	82.4
#100	3.02	12.10	9.09	19.61	31.7	68.3
#200	3.08	10.36	7.29	26.89	43.0	57.0

Data entered by: MLM
Data checked by: MLM
FileName: LKHY01Z3

Date: 11/07/2012
Date: 11/7/12



HYDROMETER ANALYSIS - SEDIMENTATION DATA
ASTM D 422

CLIENT LATA Kentucky

JOB NO. 2855-6


BORING NO. 211-B-001
DEPTH 38.0-40.0'
SAMPLE NO. 211B001GRNSZ3
SOIL DESCR. ERI12-SW-SWMU211B
LOCATION SW Plume RDSI Geotechnical

SAMPLED 10/9/12 MK
DATE TESTED 11/5/12 SKL
WASH SIEVE Yes
DRY SIEVE No

Hydrometer #	ASTM 152 H	Temp., Deg. C	22.6
Sp. Gr. of Soil	2.65	Temp. Coef. K	0.01323
Value of "alpha"	1.00	Wt. Dry Sample "W"	64.239
Deflocculant	Sodium Hexametaphosphate	% of Total Sample	100.0
Defloc. Corr'n	5.0		
Meniscus Corr'n	0.0		


T Elapsed Time (min)	Hydrometer Original	Reading Corrected "R"	100Ra/W	% Total Sample	Effective Depth L	Grain Diameter (mm)
0.0	--	--	--	--	--	--
0.5	38.00	33.00	51.4	51.4	10.06	0.0593
1.0	36.50	31.50	49.0	49.0	10.30	0.0425
2.0	35.00	30.00	46.7	46.7	10.55	0.0304
5.0	31.00	26.00	40.5	40.5	11.21	0.0198
15.0	26.75	21.75	33.9	33.9	11.90	0.0118
30.0	23.50	18.50	28.8	28.8	12.44	0.0085
60.0	21.00	16.00	24.9	24.9	12.85	0.0061
120.0	19.00	14.00	21.8	21.8	13.17	0.0044
250.0	17.50	12.50	19.5	19.5	13.42	0.0031
1440.0	15.00	10.00	15.6	15.6	13.83	0.0013

Grain Diameter = $K \cdot (\text{SQRT}(L/T))$

Data entered by: MLM
Data checked by: 
FileName: LKHY01Z3

Date: 11/07/2012
Date: 11/7/12



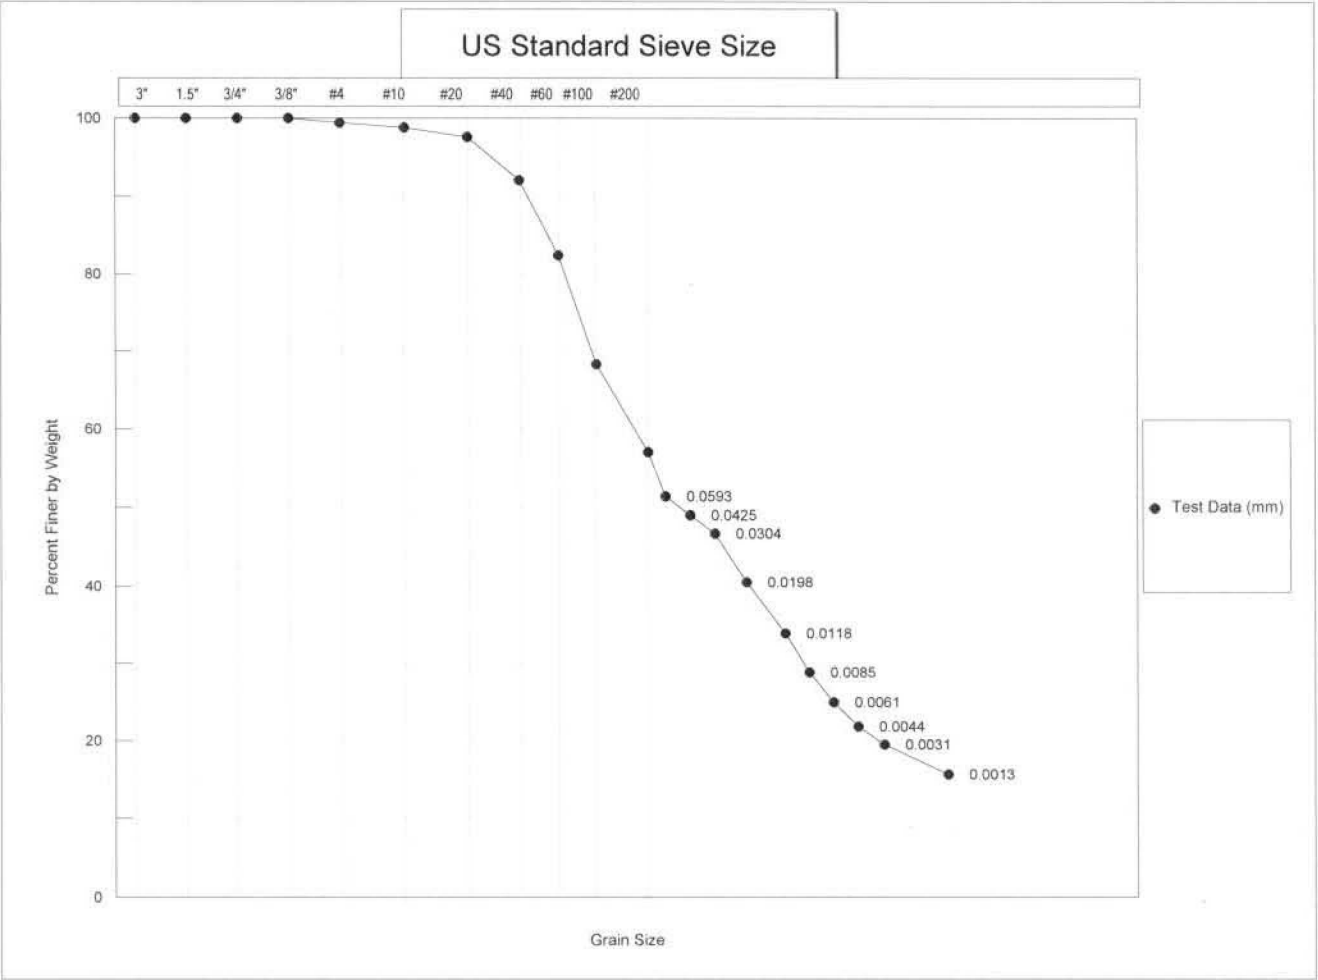

COBBLES	GRAVEL		SAND			SILT OR CLAY (mm)	
	COARSE	FINE	CRS	MEDIUM	FINE		

COBBLES TO BOULDERS	PEBBLE GRAVEL				SAND			SILT	CLAY
	COARSE	MED	FINE	GRAN	COARSE	MED	FINE		

USCS

WENTWORTH

Client: LATA Kentucky

Job Number: 2855-6

Classification:

Boring No.: 211-B-001

Depth: 38.0-40.0'

Classification Not Performed

Sample No.: 211B001GRNSZ3

Permeability Tests

ASTM D5084-10

Advanced Terra Testing

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT	LATA Environmental Services of Ky	JOB NO.	2855-06
BORING NO.	211-B-001	SAMPLED	10/09/12 KD
DEPTH	32.0-37.0' C	TEST STARTED	11/21/12 CAL
SAMPLE NO.	211B001PERM3	TEST FINISHED	12/02/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	CELL NUMBER	7P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	4658	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	211.1	206.3	
Wt. Wet Soil & Pan (g)	217.6	212.8	
Wt. Dry Soil & Pan (g)	182.3	182.3	
Wt. Lost Moisture (g)	35.3	30.5	
Wt. of Pan Only (g)	6.5	6.5	
Wt. of Dry Soil (g)	175.8	175.8	
Moisture Content %	20.1	17.4	
Wet Density PCF	130.2	136.9	
Dry Density PCF	108.4	116.6	
Init. Diameter (in)	1.613	(cm)	4.097
Init. Area (sq in)	2.043	(sq cm)	13.184
Init. Height (in)	3.022	(cm)	7.676
Vol. Bef. Consol. (cu ft)	0.00357		
Vol. After Consol. (cu ft)	0.00332		
Porosity %	32.41		

FLOW PUMP CALCULATIONS

Pump Setting	5
Velocity CM/Sec	3.29E-05
Q (cc/s)	1.05E-06
Height	2.984
Diameter	1.565
Pressure (psi)	4.740
Area after consol. (cm*cm)	12.415
Gradient	43.969
Permeability k (cm/s)	1.9E-09
Permeability k (m/s)	1.9E-11
Back Pressure (psi)	68.0
Cell Pressure (psi)	100.3
Ave. Effective Stress (psi)	29.930

Average temperature degree C: 22.4

Data entry by: MLM Date: 12/04/2012
 Checked by: CLM Date: 12/4/12
 FileName: LKP00013



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services of Ky	JOB NO.	2855-06
BORING NO.	211-B-001	SAMPLED	10/09/12 KD
DEPTH	32.0-37.0' C	TEST STARTED	11/21/12 CAL
SAMPLE NO.	211B001PERM3	TEST FINISHED	12/02/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	SETUP NO.	7P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	4658	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close	Open	Close	Open
40.0	38.0	1.5	10.2		
50.0	48.0	14.4	15.4	38.5	47.8
60.0	58.0	16.2	17.1	48.5	57.9
70.0	68.0	17.3	18.2	58.5	67.8
80.0		18.9	18.9	68.1	77.9
				9.3	9.4
				9.3	9.8


CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.30	0.00
0.25	0.50	3.00	-2.70
0.5	0.71	3.10	-2.80
1	1.00	3.15	-2.85
2	1.41	3.20	-2.90
4	2.00	3.30	-3.00
9	3.00	3.50	-3.20
16	4.00	3.70	-3.40
30	5.48	3.90	-3.60
60	7.75	4.50	-4.20
138	11.75	5.30	-5.00
240	15.49	6.10	-5.80
360	18.97	6.80	-6.50

Initial Height (in)	3.022	Init. Vol. (CC)	101.21
Height Change (in)	0.038	Vol. Change (CC)	29.90
Ht. After Cons. (in)	2.984	Cell Exp. (CC)	22.80
Initial Area (sq in)	2.043	Net Change (CC)	7.10
Area After Cons. (sq in)	1.924	Cons. Vol. (CC)	94.11


Data entry by: MLM Date: 12/04/2012
 Checked by: cm Date: 12/4/12
 FileName: LKP00013



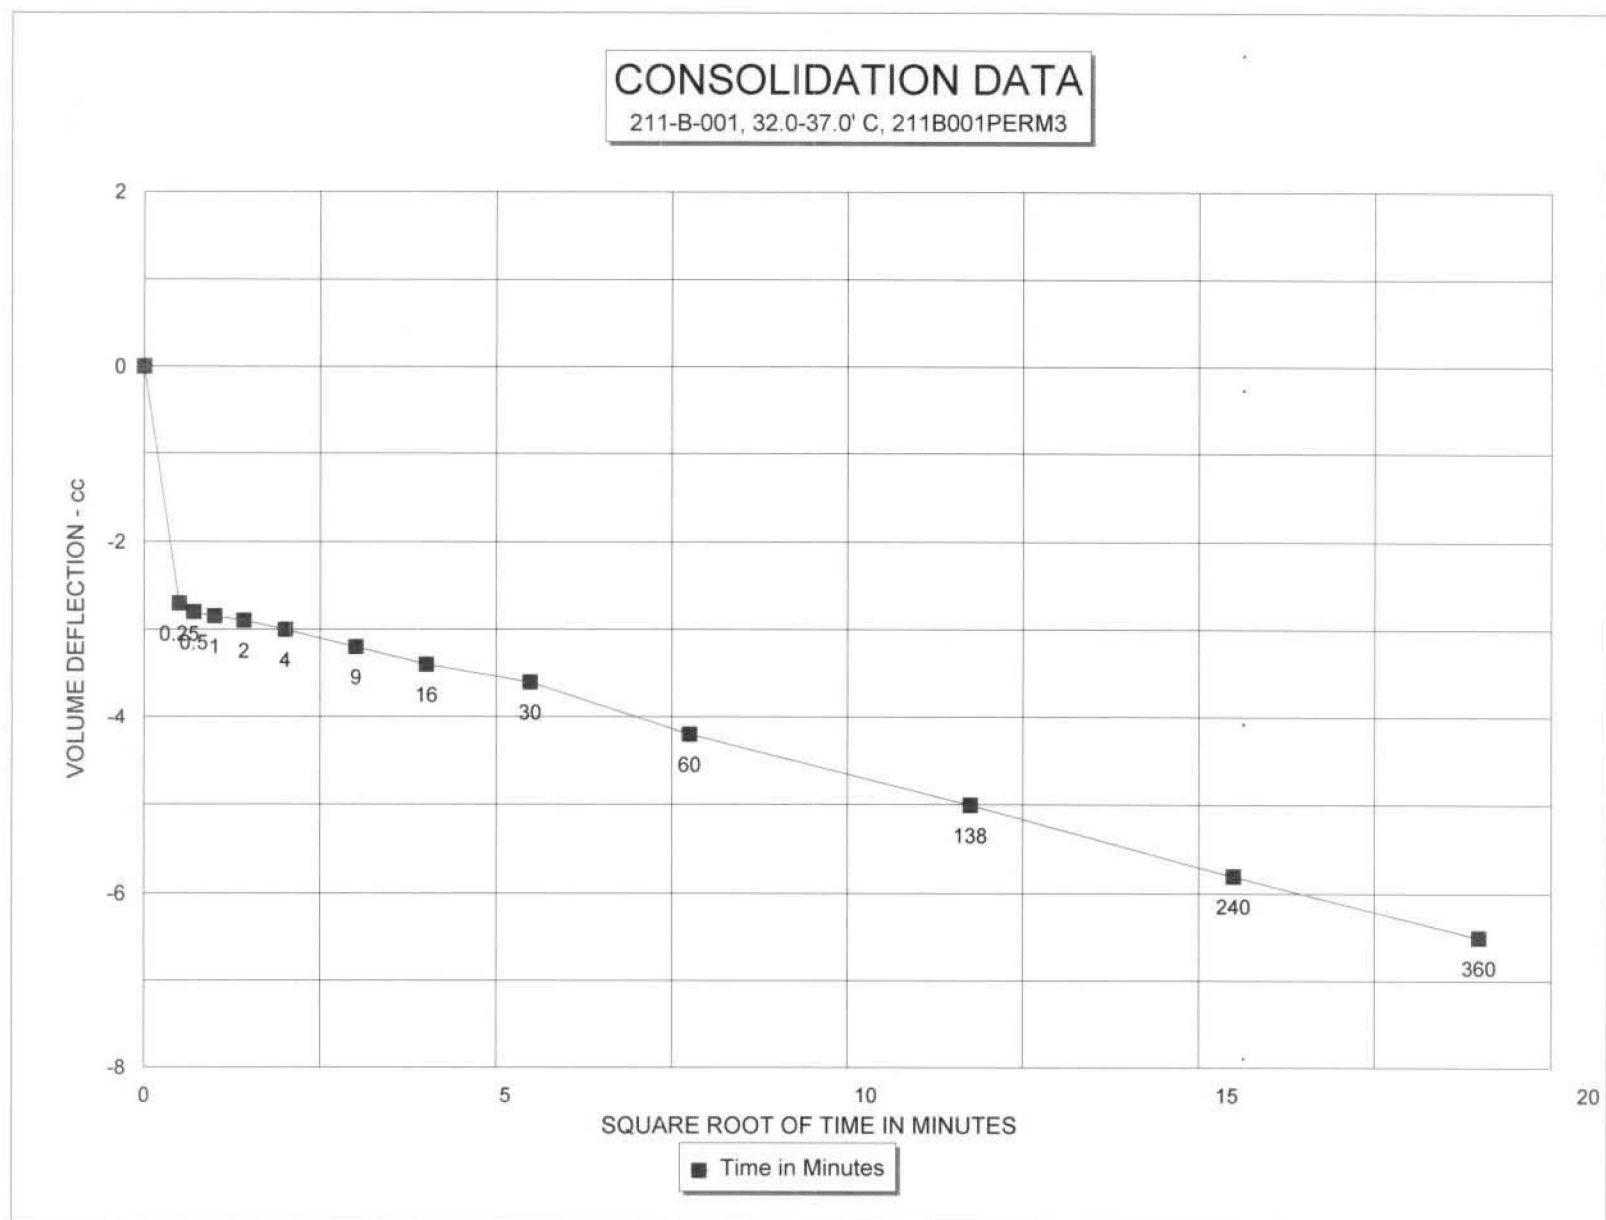

Preliminary Flow Pump Data

LATA-KY, SW Plume Geotech, 211B001PERM3

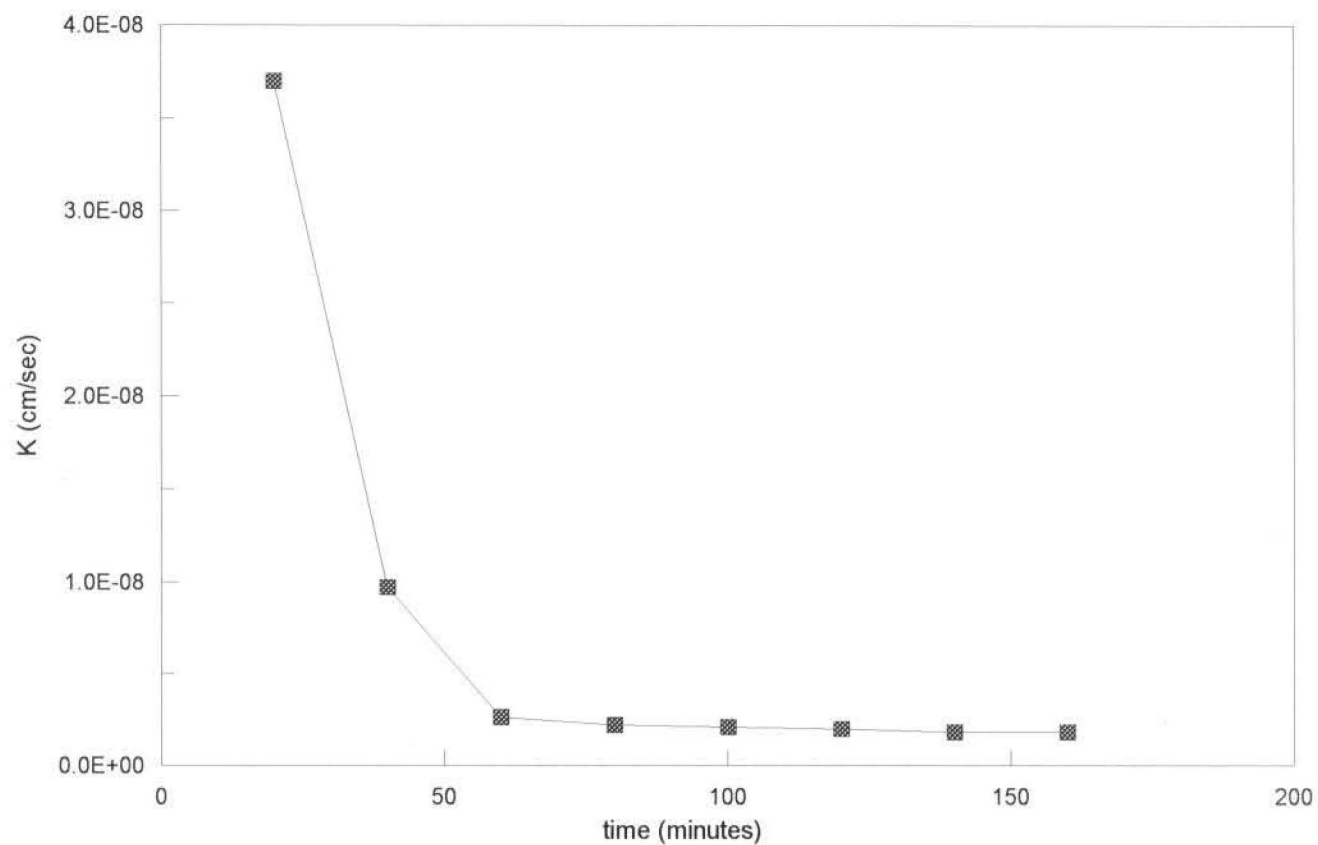


Average last 4 values
1.9E-09

Data Entered By:
Data Checked By:
File Name:

CAL
mm
LKFP0013

Date: 12/02/2012
Date Checked 12/3/12



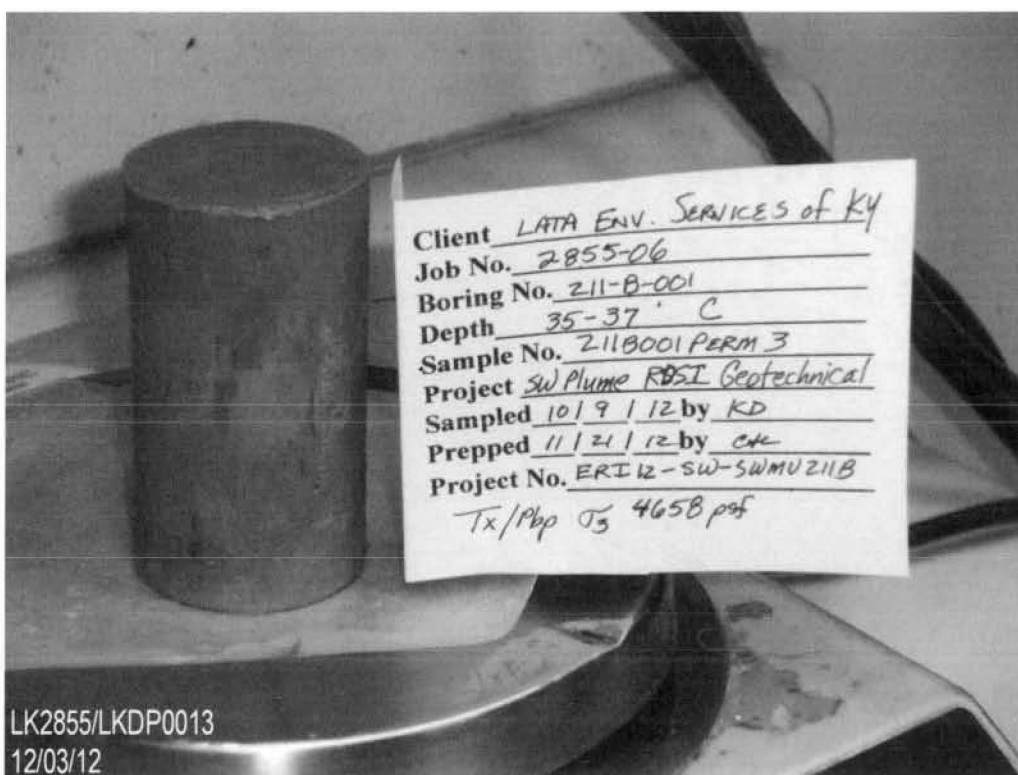

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services of KY

JOB NO. 2855-06

BORING NO.	211-B-001	SAMPLED	10/09/12 KD
DEPTH	5.0-7.0' B	TEST STARTED	11/14/12 CAL
SAMPLE NO.	211B001PERM1	TEST FINISHED	11/28/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	CELL NUMBER	9P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	776	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST
Wt. Soil + Moisture (g)	229.1	229.1
Wt. Wet Soil & Pan (g)	235.6	235.6
Wt. Dry Soil & Pan (g)	194.8	194.8
Wt. Lost Moisture (g)	40.8	40.8
Wt. of Pan Only (g)	6.5	6.5
Wt. of Dry Soil (g)	188.3	188.3
Moisture Content %	21.7	21.7
Wet Density PCF	127.6	124.2
Dry Density PCF	104.8	102.1

Init. Diameter (in)	1.654	(cm)	4.201
Init. Area (sq in)	2.149	(sq cm)	13.863
Init. Height (in)	3.184	(cm)	8.087
Vol. Bef. Consol. (cu ft)	0.00396		
Vol. After Consol. (cu ft)	0.00407		
Porosity %	35.47		

FLOW PUMP CALCULATIONS

Pump Setting	25
Velocity CM/Sec	1.64E-04
Q (cc/s)	5.25E-06
Height	3.163
Diameter	1.682
Pressure (psi)	1.160
Area after consol. (cm*cm)	14.333
Gradient	10.151
Permeability k (cm/s)	3.6E-08
Permeability k (m/s)	3.6E-10
Back Pressure (psi)	98.0
Cell Pressure (psi)	103.4
Ave. Effective Stress (psi)	4.820
Average temperature degree C:	22.5

Data entry by: DAW Date: 11/29/2012
 Checked by: CL Date: 11/30/12
 FileName: LKP00011



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services of KY	JOB NO.	2855-06
BORING NO.	211-B-001	SAMPLED	10/09/12 KD
DEPTH	5.0-7.0' B	TEST STARTED	11/14/12 CAL
SAMPLE NO.	211B001PERM1	TEST FINISHED	11/28/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	SETUP NO.	9P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	776	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	4.1 9.3			
50.0	48.0	9.8 11.0	38.7 47.0	8.3	0.83
60.0	58.0	11.0 11.9	48.8 57.1	8.3	0.83
70.0	68.0	12.0 12.9	58.6 67.1	8.5	0.85
80.0	78.0	13.6 14.4	68.7 77.6	8.9	0.89
90.0	88.0	14.7 15.5	78.7 88.0	9.3	0.93
100.0	98.0	15.4 16.2	88.7 97.9	9.2	0.92
110.0		16.3 16.4	98.7 108.2	9.5	0.95


CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	16.40	0.00
0.25	0.50	16.70	-0.30
0.5	0.71	16.70	-0.30
1	1.00	16.75	-0.35
2	1.41	16.75	-0.35
4	2.00	16.80	-0.40
9	3.00	16.80	-0.40
16	4.00	16.85	-0.45
30	5.48	16.90	-0.50
60	7.75	16.95	-0.55
120	10.95	17.05	-0.65
240	15.49	17.05	-0.65
360	18.97	17.05	-0.65

Initial Height (in)	3.184	Init. Vol. (CC)	112.13
Height Change (in)	0.021	Vol. Change (CC)	13.10
Ht. After Cons. (in)	3.163	Cell Exp. (CC)	16.15
Initial Area (sq in)	2.149	Net Change (CC)	-3.05
Area After Cons. (sq in)	2.222	Cons. Vol. (CC)	115.18


Data entry by: DAW Date: 11/29/2012
 Checked by: OK Date: 11/30/12
 FileName: LKP00011



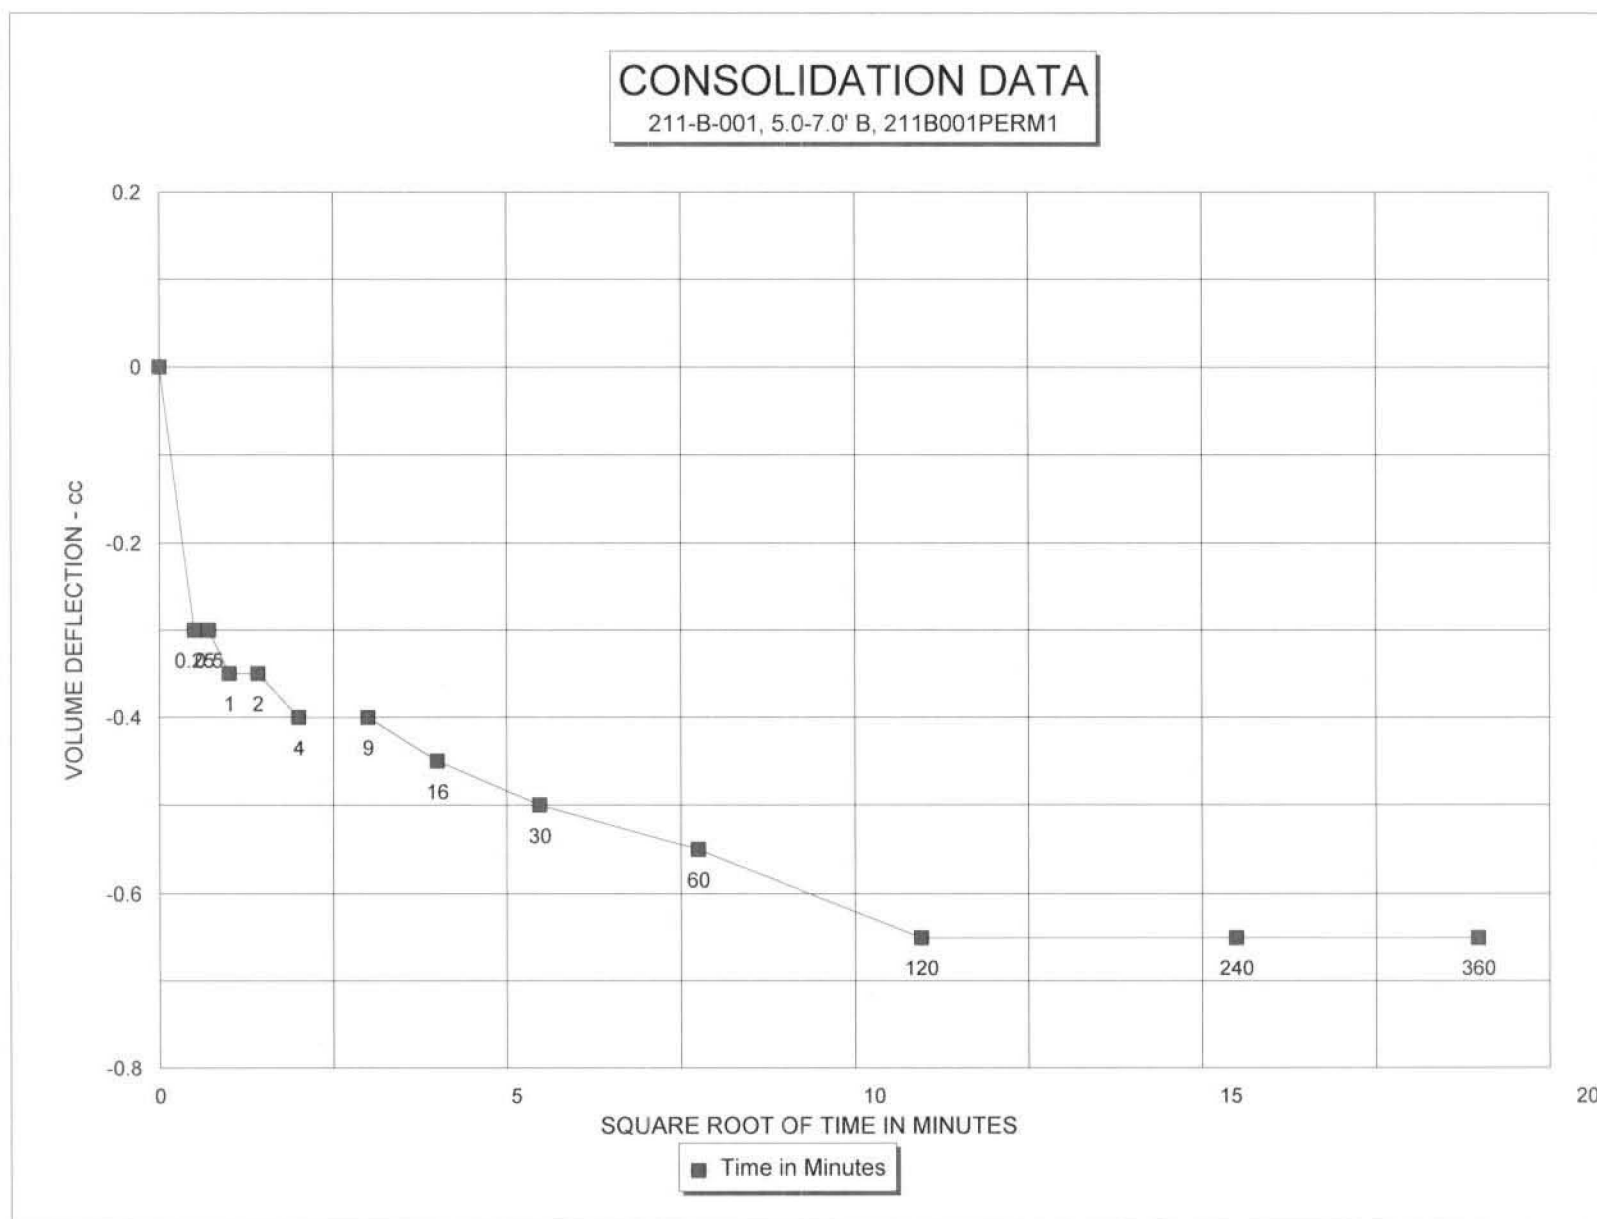

Preliminary Flow Pump Data

LATA-KY, SW Plume Geotech, 211B001PERM1

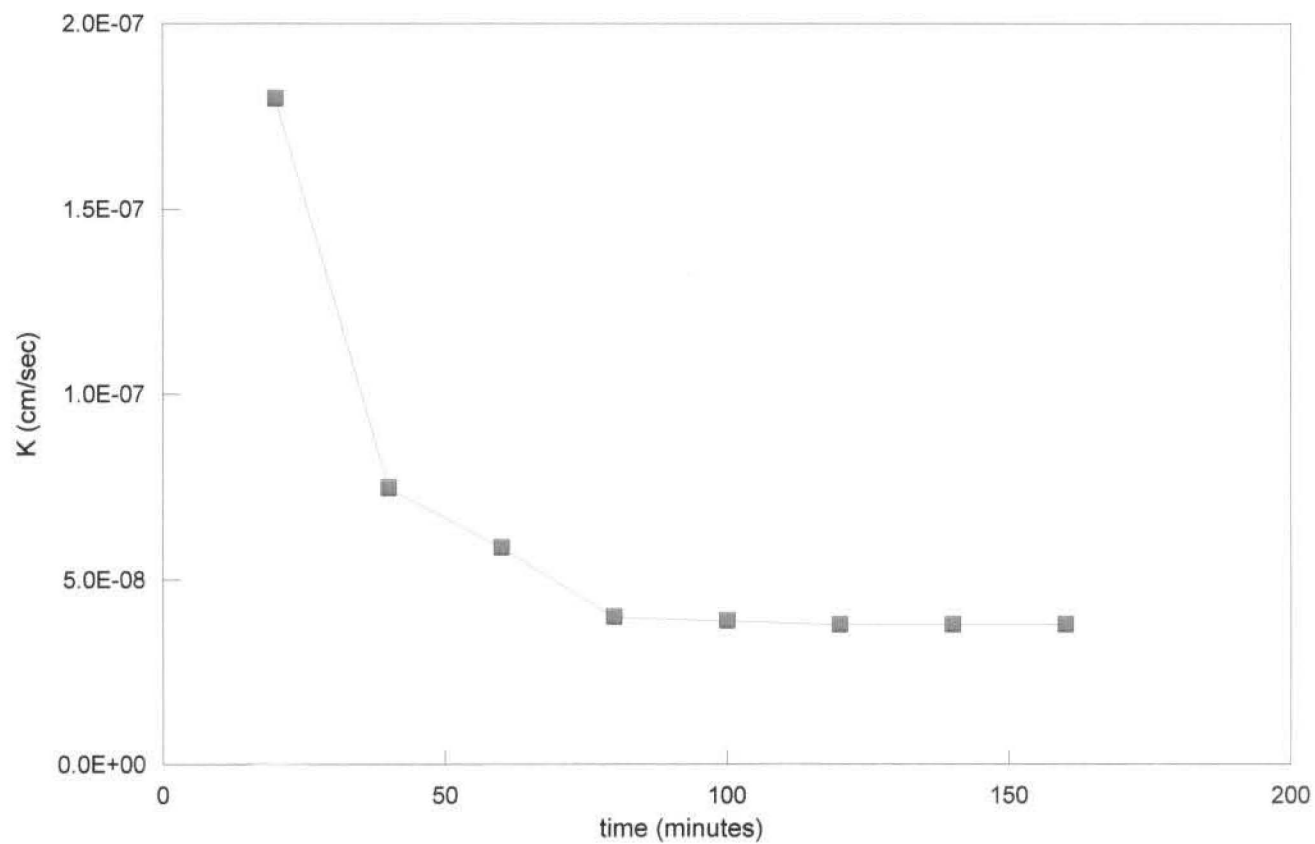


Average last 4 values
3.8E-08

Data Entered By:
Data Checked By:
File Name:

CAL
DW
LKFP0011

Date: 11/28/2012
Date Checked 11/29/12



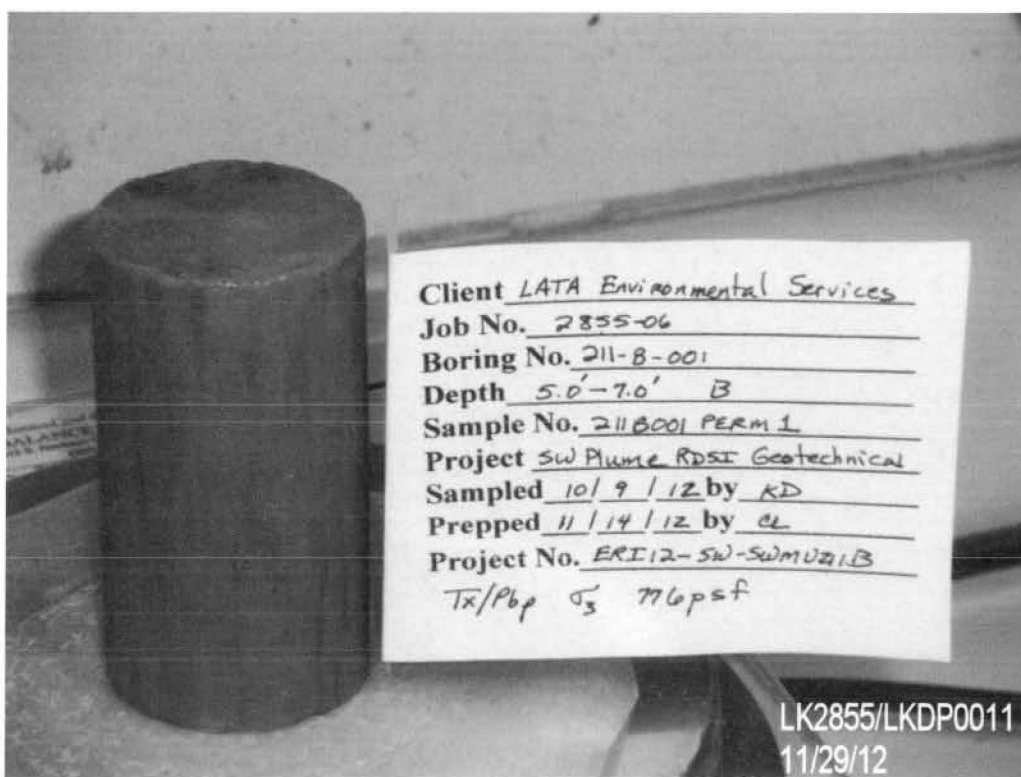

Client LATA Environmental Services

Job No. 2855-06

Boring No. 211-B-001

Depth 5.0'-7.0' B

Sample No. 211B001 PERM 1

Project SW Plume RDSI Geotechnical

Sampled 10/9/12 by KD

Prepped 11/14/12 by CL

Project No. ERI12-SW-SWMU21B

Tx/P6p σ_3 76 pcf

LK2855/LKDP0011

11/29/12

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services - KY

JOB NO. 2855-06

BORING NO.	211-B-001	SAMPLED	10/09/12 KD
DEPTH	15-17' A	TEST STARTED	11/13/12 CAL
SAMPLE NO.	211B001PERM2	TEST FINISHED	11/19/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	CELL NUMBER	13S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	2070	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST
Wt. Soil + Moisture (g)	231.9	237.0
Wt. Wet Soil & Pan (g)	238.3	243.5
Wt. Dry Soil & Pan (g)	214.3	214.3
Wt. Lost Moisture (g)	24.1	29.2
Wt. of Pan Only (g)	6.5	6.5
Wt. of Dry Soil (g)	207.8	207.8
Moisture Content %	11.6	14.1
Wet Density PCF	134.0	140.1
Dry Density PCF	120.1	122.8

Init. Diameter (in)	1.617	(cm)	4.107
Init. Area (sq in)	2.054	(sq cm)	13.250
Init. Height (in)	3.210	(cm)	8.153
Vol. Bef. Consol. (cu ft)	0.00381		
Vol. After Consol. (cu ft)	0.00373		
Porosity %	27.66		

FLOW PUMP CALCULATIONS

Pump Setting (gear number)	9
Percentage of Pump setting	100
Q (cc/s)	2.28E-04
Height	3.189
Diameter	1.604
Pressure (psi)	0.716
Area after consol. (cm*cm)	13.041
Gradient	6.215
Permeability k (cm/s)	2.8E-06
Permeability k (m/s)	2.8E-08
Back Pressure (psi)	58.0
Cell Pressure (psi)	72.4
Ave. Effective Stress (psi)	14.042

Average temperature degree C: 21.6

NOTE: Filling required on top, bottom and sides to fill gravel voids.

Data entry by: DAW Date: 11/26/2012
 Checked by: cat Date: 11/27/12
 FileName: LKP00012



TRIAXIAL COMPRESSION TEST DATA

CLIENT LATA Environmental Services - KY

JOB NO. 2855-06

BORING NO.	211-B-001	SAMPLED	10/09/12 KD
DEPTH	15-17' A	TEST STARTED	11/13/12 CAL
SAMPLE NO.	211B001PERM2	TEST FINISHED	11/19/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	SETUP NO.	13S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	2070	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	11.7 17.9			
50.0	48.0	18.6 19.4	38.7 46.4	7.7	0.77
60.0	58.0	19.5 20.2	48.6 56.9	8.3	0.83
70.0		20.3 20.4	58.5 68.0	9.5	0.95

CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.50	0.00
0.25	0.50	1.80	-1.30
0.5	0.71	1.90	-1.40
1	1.00	2.20	-1.70
2	1.41	2.45	-1.95
5	2.24	2.90	-2.40
9	3.00	3.15	-2.65
16	4.00	3.20	-2.70
30	5.48	3.45	-2.95
60	7.75	3.60	-3.10
120	10.95	3.70	-3.20
240	15.49	3.70	-3.20
360	18.97	3.70	-3.20


Initial Height (in)	3.210	Init. Vol. (CC)	108.04
Height Change (in)	0.021	Vol. Change (CC)	12.20
Ht. After Cons. (in)	3.189	Cell Exp. (CC)	9.81
Initial Area (sq in)	2.054	Net Change (CC)	2.39
Area After Cons. (sq in)	2.021	Cons. Vol. (CC)	105.65


Data entry by: DAW Date: 11/26/2012
 Checked by: AW Date: 11/27/12
 FileName: LKP00012



CONSOLIDATION DATA

211-B-001, 15-17' A, 211B001PERM2

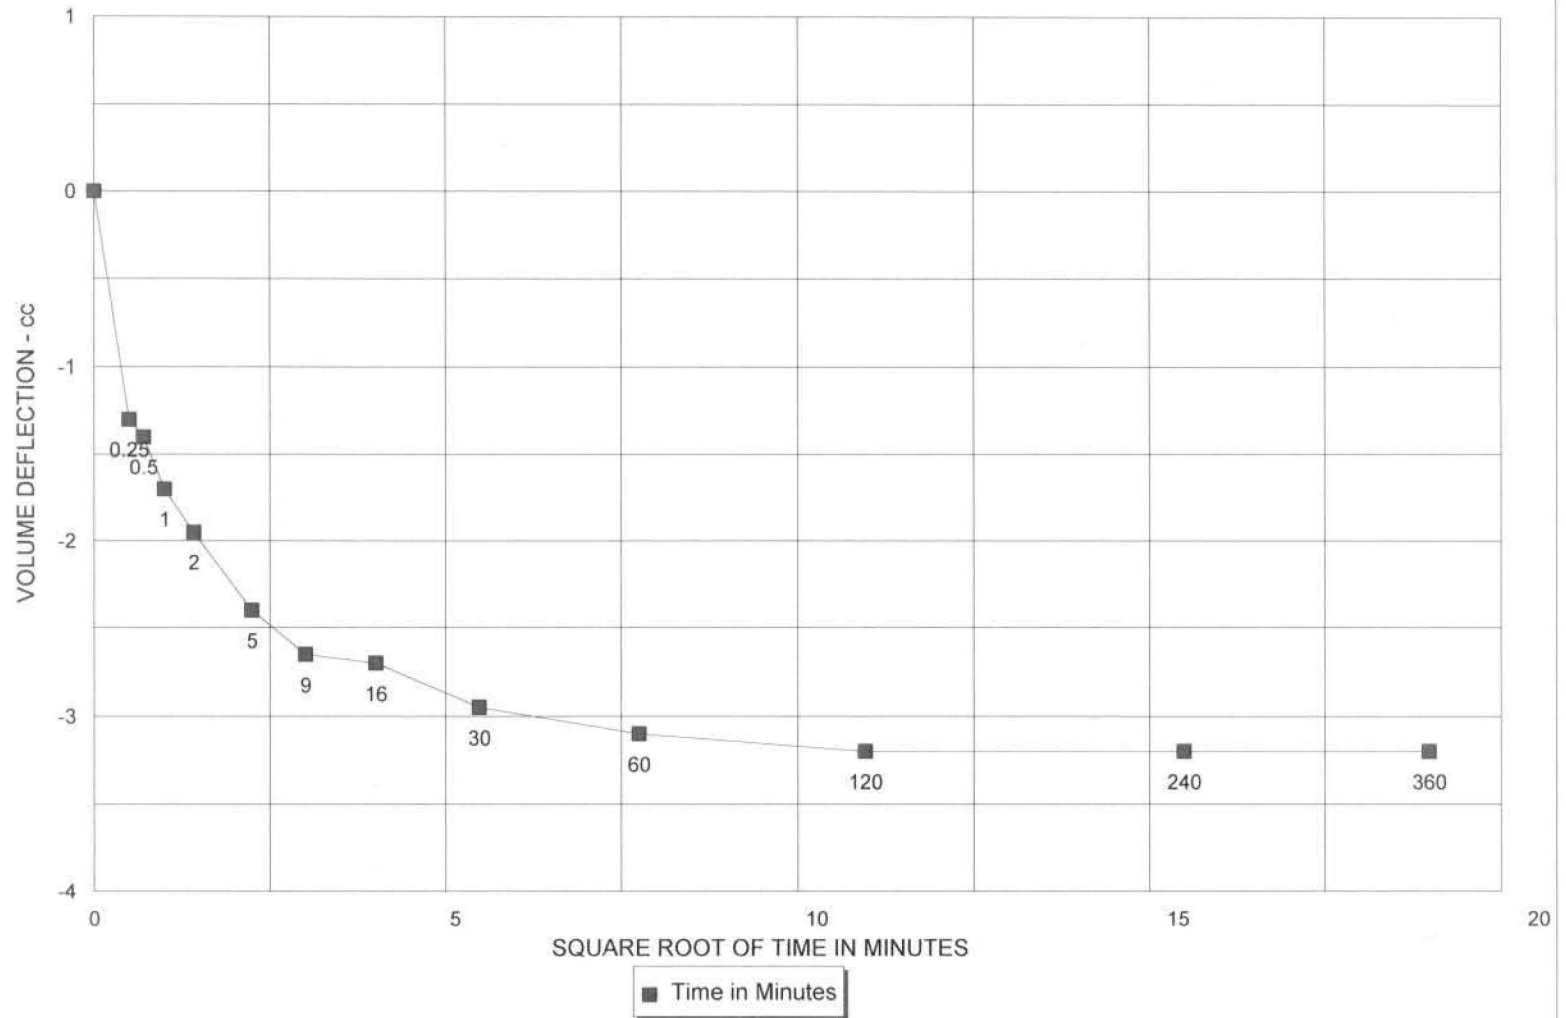


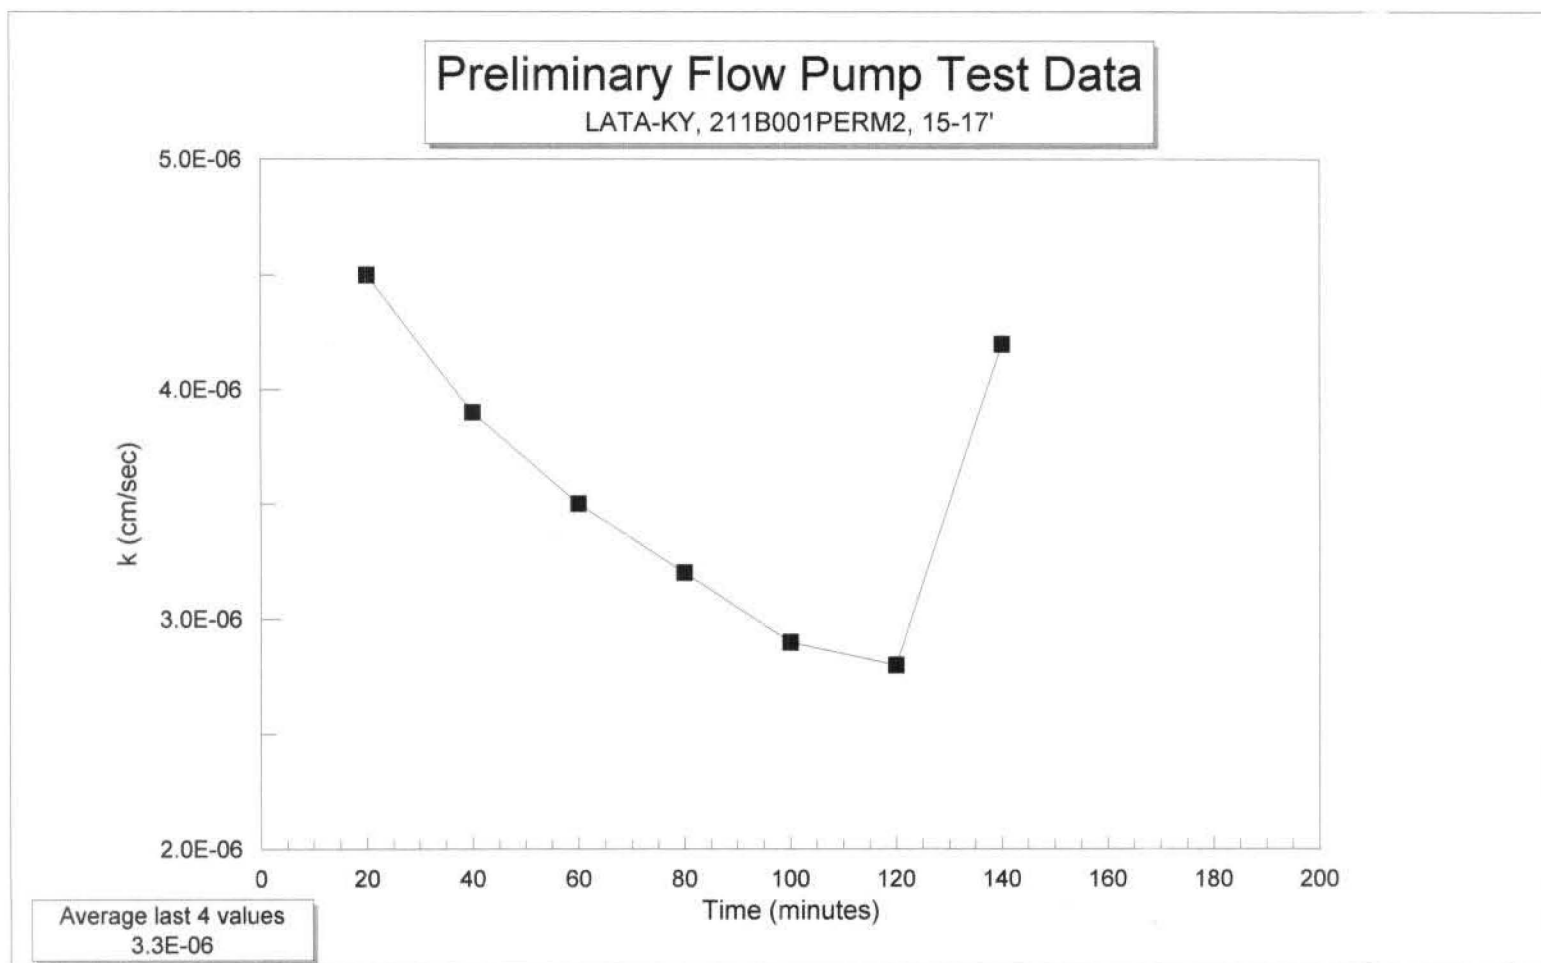

Data Entered By: CAL
Data Checked By: [Signature]
File Name: LKFP0012

Date: 11/19/2012
Date Checked: 11/20/12



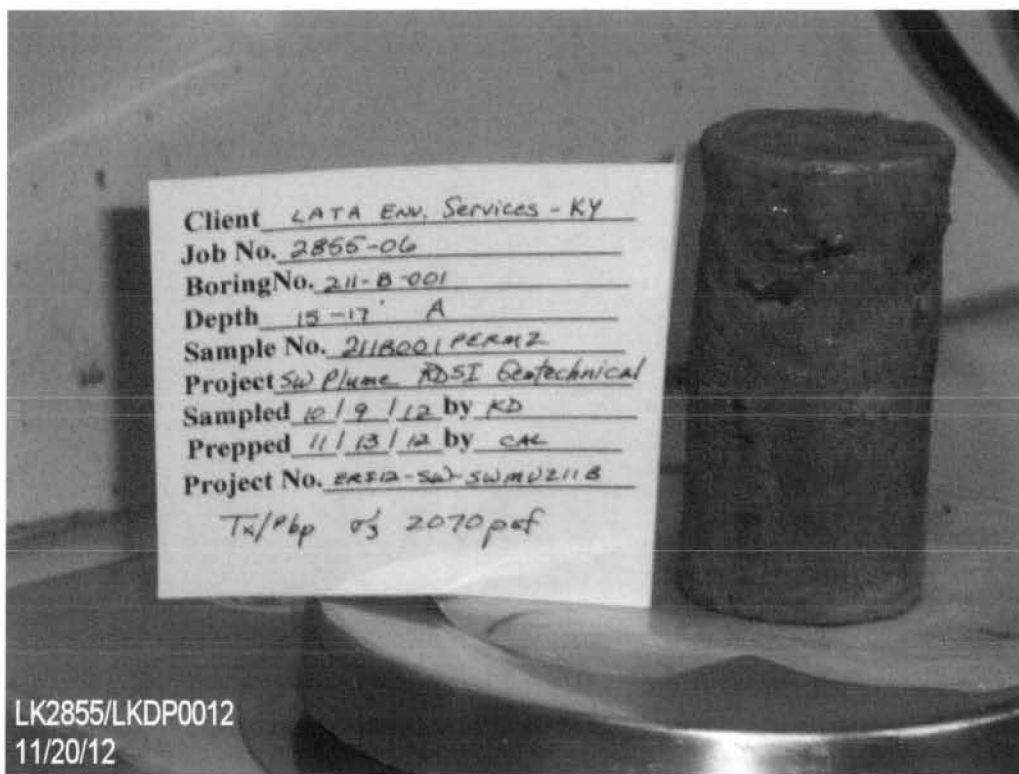

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services of Ky

JOB NO. 2855-06

BORING NO.	211-B-004	SAMPLED	10/11/12 KD
DEPTH	8-10' (A)	TEST STARTED	11/02/12 CAL
SAMPLE NO.	211B004PERM1	TEST FINISHED	11/17/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	CELL NUMBER	7P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	1164	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST
Wt. Soil + Moisture (g)	229.7	227.8
Wt. Wet Soil & Pan (g)	236.2	234.3
Wt. Dry Soil & Pan (g)	195.2	195.2
Wt. Lost Moisture (g)	41.0	39.1
Wt. of Pan Only (g)	6.5	6.5
Wt. of Dry Soil (g)	188.7	188.7
Moisture Content %	21.7	20.7
Wet Density PCF	128.1	140.1
Dry Density PCF	105.2	116.0

Init. Diameter (in)	1.660	(cm)	4.216
Init. Area (sq in)	2.164	(sq cm)	13.964
Init. Height (in)	3.157	(cm)	8.019
Vol. Bef. Consol. (cu ft)	0.00395		
Vol. After Consol. (cu ft)	0.00359		
Porosity %	38.54		

FLOW PUMP CALCULATIONS

Pump Setting	45
Velocity CM/Sec	2.95E-04
Q (cc/s)	9.44E-06
Height	3.133
Diameter	1.587
Pressure (psi)	0.166
Area after consol. (cm*cm)	12.759
Gradient	1.467
Permeability k (cm/s)	5.0E-07
Permeability k (m/s)	5.0E-09
Back Pressure (psi)	38.0
Cell Pressure (psi)	46.1
Ave. Effective Stress (psi)	8.017
Average temperature degree C:	22.1

Data entry by: MLM Date: 11/19/2012
 Checked by: CH Date: 11/19/12
 FileName: LKP00041



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services of Ky	JOB NO.	2855-06
BORING NO.	211-B-004	SAMPLED	10/11/12 KD
DEPTH	8-10' (A)	TEST STARTED	11/02/12 CAL
SAMPLE NO.	211B004PERM1	TEST FINISHED	11/17/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	SETUP NO.	7P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	1164	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close	Open		
40.0	38.0	1.2	9.7		
50.0		13.0	13.2	38.8	48.5
				9.7	0.97


CONSOLIDATION DATA


Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.30	0.00
0.25	0.50	0.90	-0.60
0.5	0.71	0.95	-0.65
1	1.00	1.00	-0.70
2	1.41	1.00	-0.70
4	2.00	1.10	-0.80
9	3.00	1.20	-0.90
16	4.00	1.30	-1.00
30	5.48	1.40	-1.10
60	7.75	1.70	-1.40
120	10.95	1.95	-1.65
240	15.49	2.20	-1.90
360	18.97	2.60	-2.30

Initial Height (in)	3.157	Init. Vol. (CC)	111.98
Height Change (in)	0.024	Vol. Change (CC)	24.20
Ht. After Cons. (in)	3.133	Cell Exp. (CC)	13.76
Initial Area (sq in)	2.164	Net Change (CC)	10.44
Area After Cons. (sq in)	1.978	Cons. Vol. (CC)	101.55

Data entry by: MLM Date: 11/19/2012
 Checked by: CM Date: 11/19/12
 FileName: LKP00041



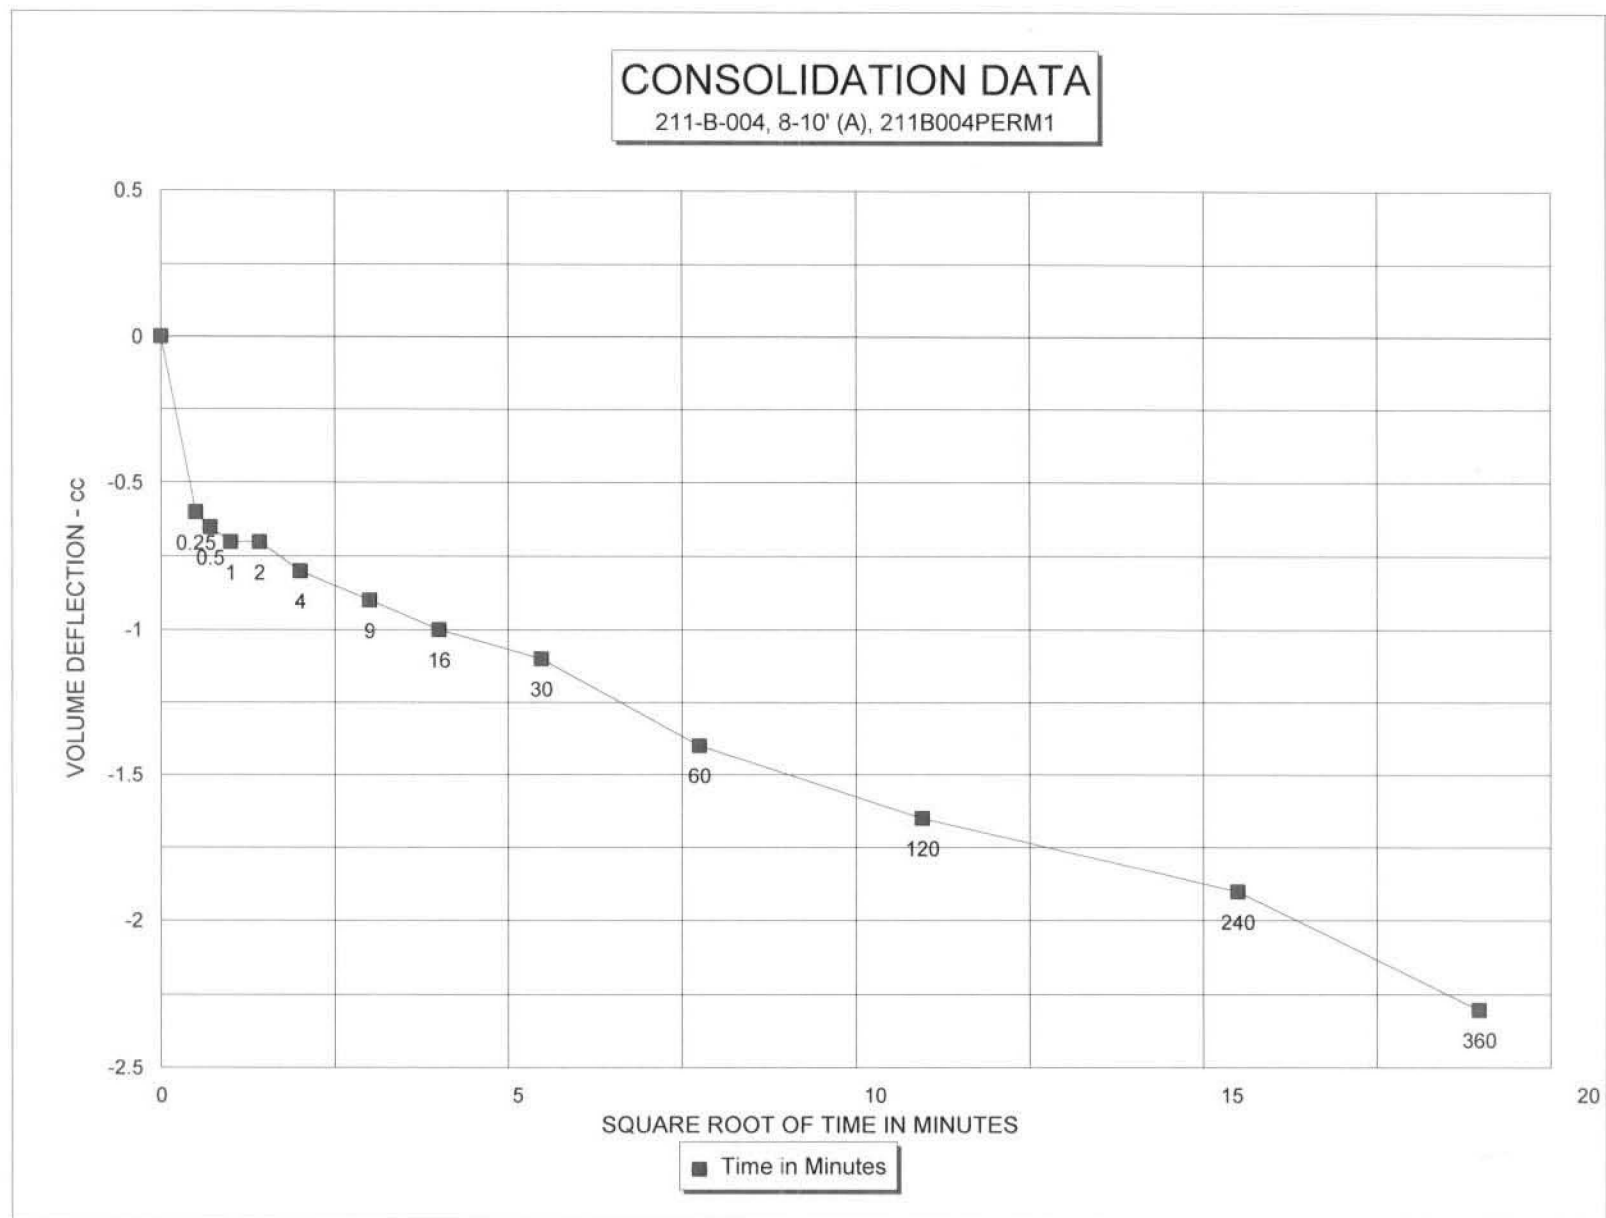

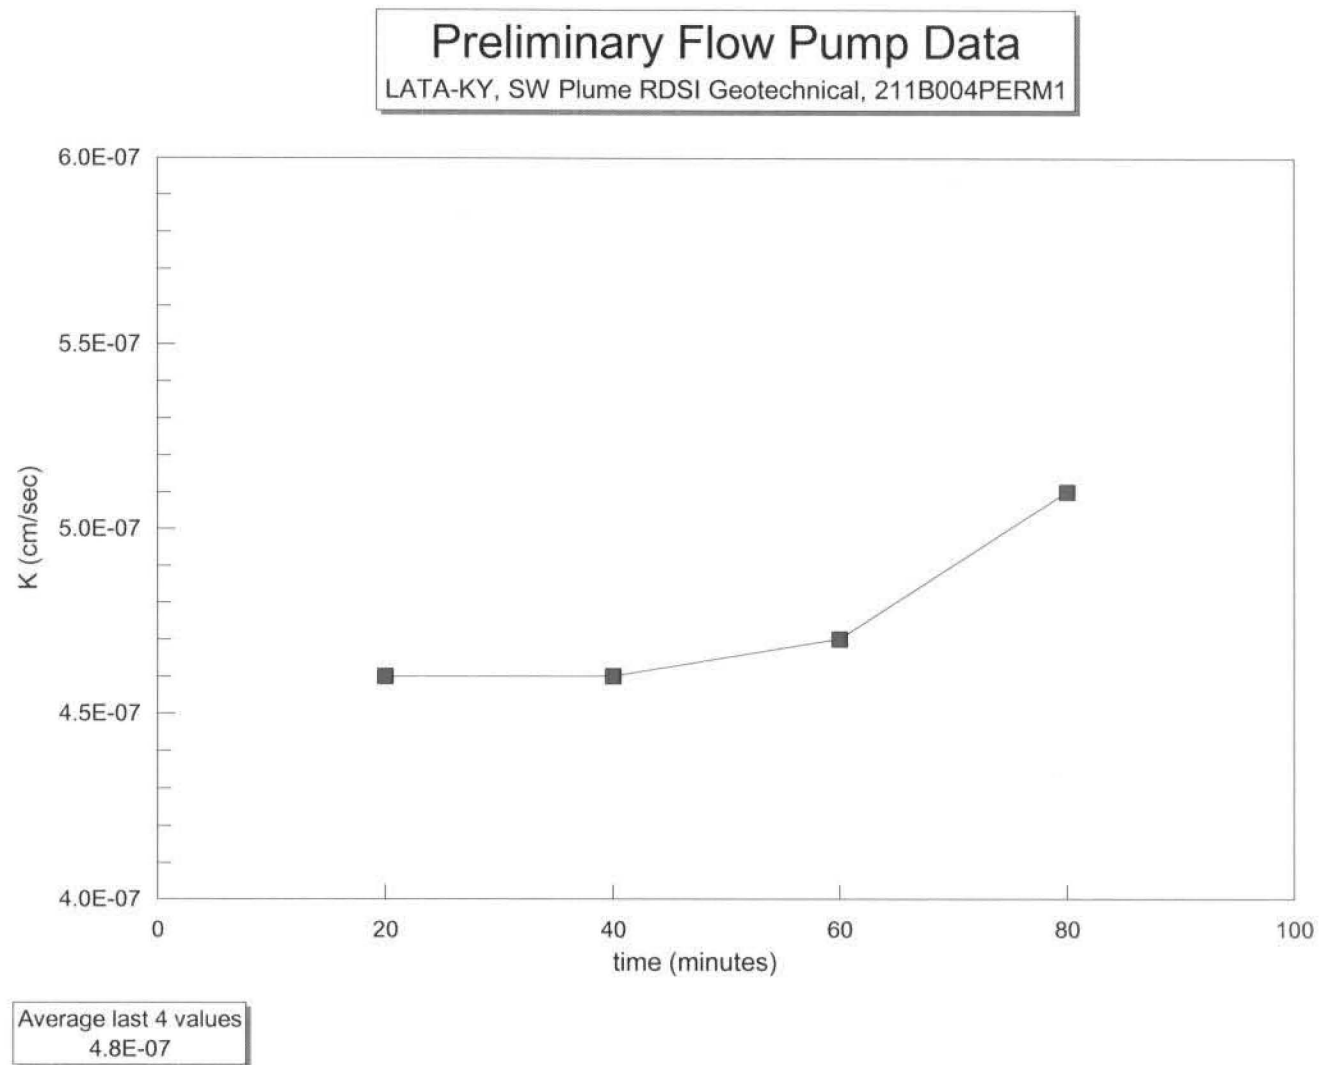

Data Entered By:
Data Checked By:
File Name:

CAL

LKFP0041

Date: 11/17/2012
Date Checked 11/19/12



Client LATA Env. Services of KY
Job No. 2855-06
Boring No. 211-B-004
Depth 8-10' (A)
Sample No. 211B004PERM1
Project SW Anne RDSI Geotechnical
Sampled 10/11/12 by FD
Prepped 11/02/12 by CA
Project No. ERID-SW-SWMU211B
Tx/Pbp σ_3 1164 psf

LK2855/LKDP810A
11/19/12

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services of KY

JOB NO. 2855-06

BORING NO.	211-B-004	SAMPLED	10/11/12 KD
DEPTH	18-20' A	TEST STARTED	11/02/12 CAL
SAMPLE NO.	211B004PERM2	TEST FINISHED	11/14/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	CELL NUMBER	9P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	2458	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	210.0	210.5	
Wt. Wet Soil & Pan (g)	216.5	217.1	
Wt. Dry Soil & Pan (g)	191.0	191.0	
Wt. Lost Moisture (g)	25.5	26.1	
Wt. of Pan Only (g)	6.6	6.6	
Wt. of Dry Soil (g)	184.4	184.4	
Moisture Content %	13.8	14.1	
Wet Density PCF	138.5	142.0	
Dry Density PCF	121.7	124.4	
Init. Diameter (in)	1.651	(cm)	4.194
Init. Area (sq in)	2.141	(sq cm)	13.813
Init. Height (in)	2.697	(cm)	6.850
Vol. Bef. Consol. (cu ft)	0.00334		
Vol. After Consol. (cu ft)	0.00327		
Porosity %	28.16		

FLOW PUMP CALCULATIONS

Pump Setting	5
Velocity CM/Sec	3.29E-05
Q (cc/s)	1.05E-06
Height	2.679
Diameter	1.639
Pressure (psi)	4.700
Area after consol. (cm*cm)	13.605
Gradient	48.562
Permeability k (cm/s)	1.6E-09
Permeability k (m/s)	1.6E-11
Back Pressure (psi)	88.0
Cell Pressure (psi)	105.1
Ave. Effective Stress (psi)	14.750

Average temperature degree C: 22.1

NOTE: Filling required due to 1" gravel in sample.

Data entry by: DAW Date: 11/19/2012
 Checked by: Cue Date: 11/19/2012
 FileName: LKP00042



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services of KY	JOB NO.	2855-06
BORING NO.	211-B-004	SAMPLED	10/11/12 KD
DEPTH	18-20' A	TEST STARTED	11/02/12 CAL
SAMPLE NO.	211B004PERM2	TEST FINISHED	11/14/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	SETUP NO.	9P
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	2458	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	1.2 7.2			
50.0	48.0	9.6 11.0	38.3 45.9	7.6	0.76
60.0	58.0	11.4 12.3	48.6 56.5	7.9	0.79
70.0	68.0	13.0 13.8	58.6 67.2	8.6	0.86
80.0	78.0	14.3 15.1	68.6 77.5	8.9	0.89
90.0	88.0	15.6 16.4	78.6 87.6	9.0	0.90
100.0		16.8 16.9	88.3 97.9	9.6	0.96


CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.40	0.00
0.25	0.50	1.80	-1.40
0.5	0.71	1.80	-1.40
1	1.00	1.90	-1.50
2	1.41	1.90	-1.50
4	2.00	1.95	-1.55
9	3.00	2.05	-1.65
16	4.00	2.10	-1.70
30	5.48	2.20	-1.80
60	7.75	2.30	-1.90
120	10.95	2.45	-2.05
240	15.49	2.60	-2.20
360	18.97	2.60	-2.20

Initial Height (in)	2.697	Init. Vol. (CC)	94.63
Height Change (in)	0.018	Vol. Change (CC)	18.40
Ht. After Cons. (in)	2.679	Cell Exp. (CC)	16.36
Initial Area (sq in)	2.141	Net Change (CC)	2.04
Area After Cons. (sq in)	2.109	Cons. Vol. (CC)	92.59


Data entry by: _____ DAW Date: 11/19/2012
 Checked by: one Date: 11/19/2012
 FileName: LKP00042



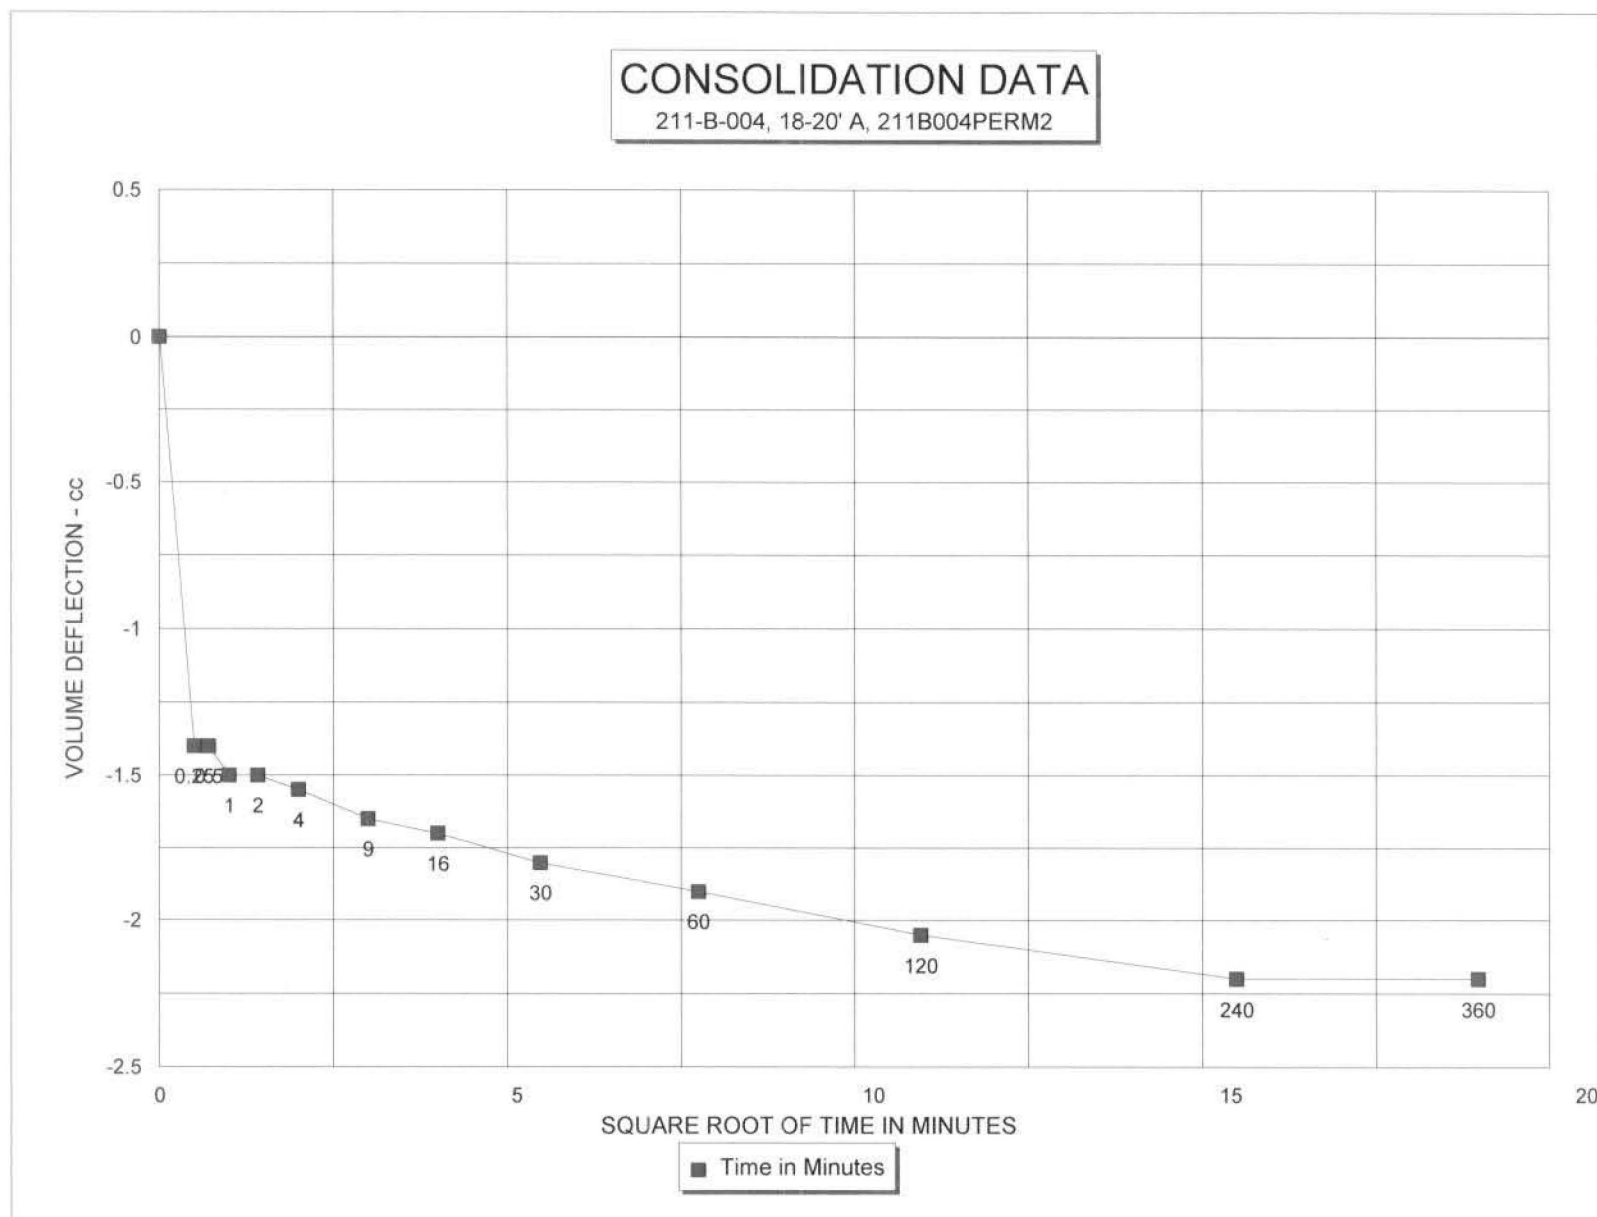

Preliminary Flow Pump Data

LATA-KY, SW Plume Geotech, 211B004PERM2

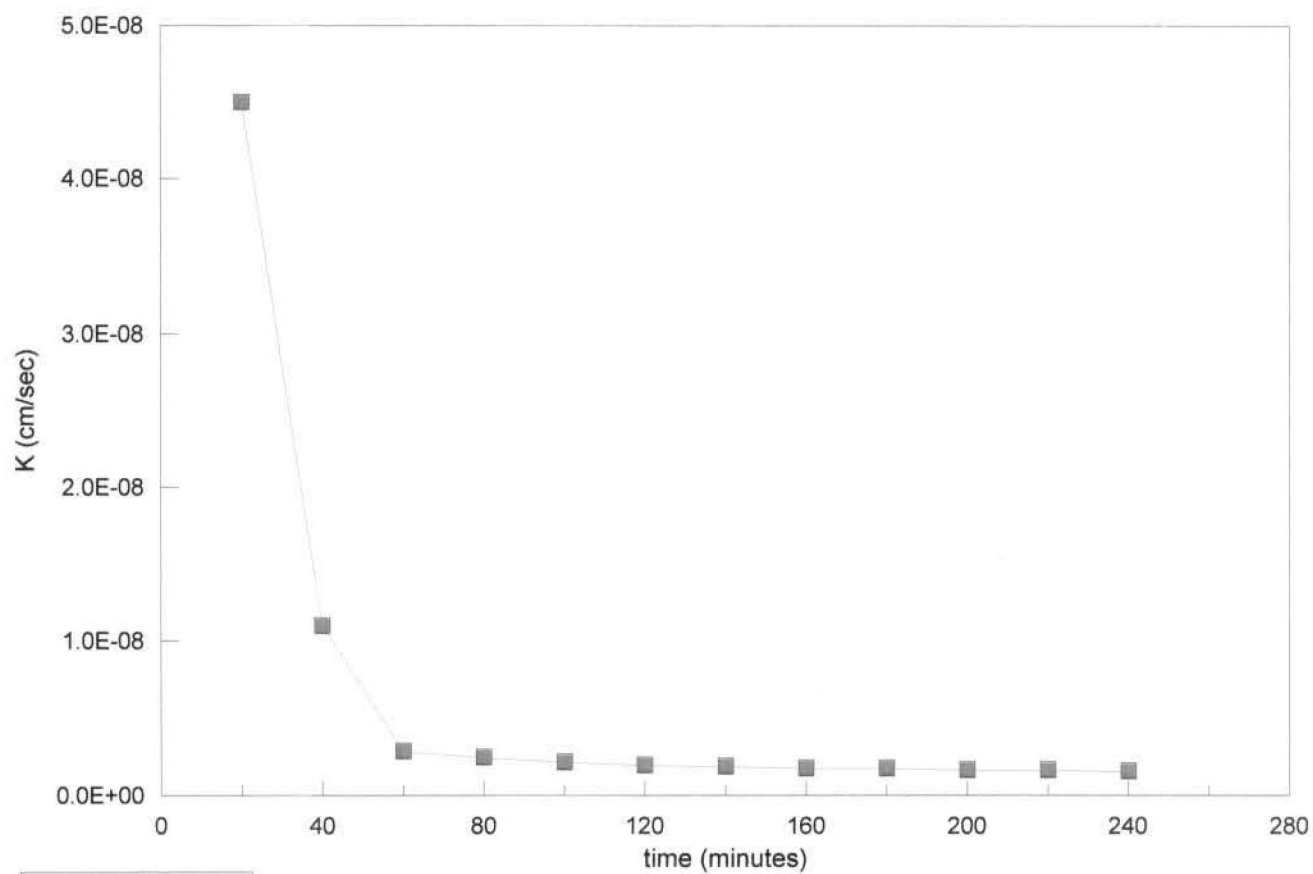


Average last 4 values
 1.6×10^{-9}

Data Entered By:
Data Checked By:
File Name:

CAL
[Signature]
LKFP0042

Date: 11/14/2012
Date Checked 11/15/12



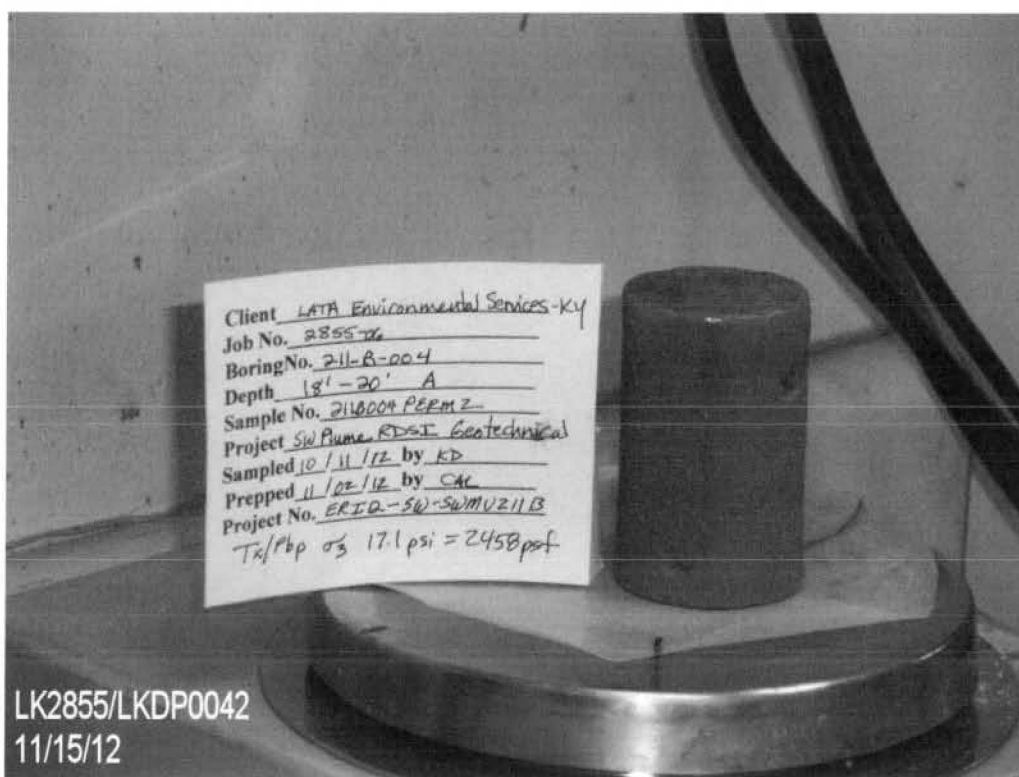

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services of Ky

JOB NO. 2855-06

BORING NO.	211-B-004	SAMPLED	10/11/12 KD
DEPTH	38-40' (A)	TEST STARTED	11/02/12 CAL
SAMPLE NO.	211B004PERM3	TEST FINISHED	11/13/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	CELL NUMBER	13S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	5046	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST
Wt. Soil + Moisture (g)	236.9	233.1
Wt. Wet Soil & Pan (g)	243.7	239.9
Wt. Dry Soil & Pan (g)	203.0	203.0
Wt. Lost Moisture (g)	40.8	36.9
Wt. of Pan Only (g)	6.8	6.8
Wt. of Dry Soil (g)	196.2	196.2
Moisture Content %	20.8	18.8
Wet Density PCF	131.8	133.8
Dry Density PCF	109.1	112.6

Init. Diameter (in)	1.662	(cm)	4.221
Init. Area (sq in)	2.169	(sq cm)	13.997
Init. Height (in)	3.157	(cm)	8.019
Vol. Bef. Consol. (cu ft)	0.00396		
Vol. After Consol. (cu ft)	0.00384		
Porosity %	33.95		

FLOW PUMP CALCULATIONS

Pump Setting	5
Velocity CM/Sec	3.29E-05
Q (cc/s)	1.05E-06
Height	3.090
Diameter	1.654
Pressure (psi)	3.490
Area after consol. (cm*cm)	13.863
Gradient	31.264
Permeability k (cm/s)	2.4E-09
Permeability k (m/s)	2.4E-11
Back Pressure (psi)	48.0
Cell Pressure (psi)	83.0
Ave. Effective Stress (psi)	33.255

Average temperature degree C: 22.0

Data entry by: MLM Date: 11/14/12
Checked by: MLM Date: 11/14/12
FileName: LKP00043



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services of Ky	JOB NO.	2855-06
BORING NO.	211-B-004	SAMPLED	10/11/12 KD
DEPTH	38-40' (A)	TEST STARTED	11/02/12 CAL
SAMPLE NO.	211B004PERM3	TEST FINISHED	11/13/12 CAL
SOIL DESCR.	ERI12-SW-SWMU211B	SETUP NO.	13S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	5046	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	1.8 6.8			
50.0	48.0	7.3 8.1	38.2 47.5	9.3	0.93
60.0		8.3 8.4	48.7 58.2	9.5	0.95


CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.40	0.00
0.25	0.50	3.00	-2.60
0.5	0.71	3.15	-2.75
1	1.00	3.30	-2.90
2	1.41	3.50	-3.10
4	2.00	3.70	-3.30
9	3.00	4.05	-3.65
16	4.00	4.40	-4.00
30	5.48	4.90	-4.50
60	7.75	5.50	-5.10
120	10.95	6.30	-5.90
240	15.49	6.80	-6.40
360	18.97	7.00	-6.60

Initial Height (in)	3.157	Init. Vol. (CC)	112.25
Height Change (in)	0.067	Vol. Change (CC)	14.20
Ht. After Cons. (in)	3.090	Cell Exp. (CC)	10.77
Initial Area (sq in)	2.169	Net Change (CC)	3.43
Area After Cons. (sq in)	2.149	Cons. Vol. (CC)	108.82


Data entry by: MLM Date: 11/14/2012
 Checked by: CM Date: 11/14/12
 FileName: LKP00043



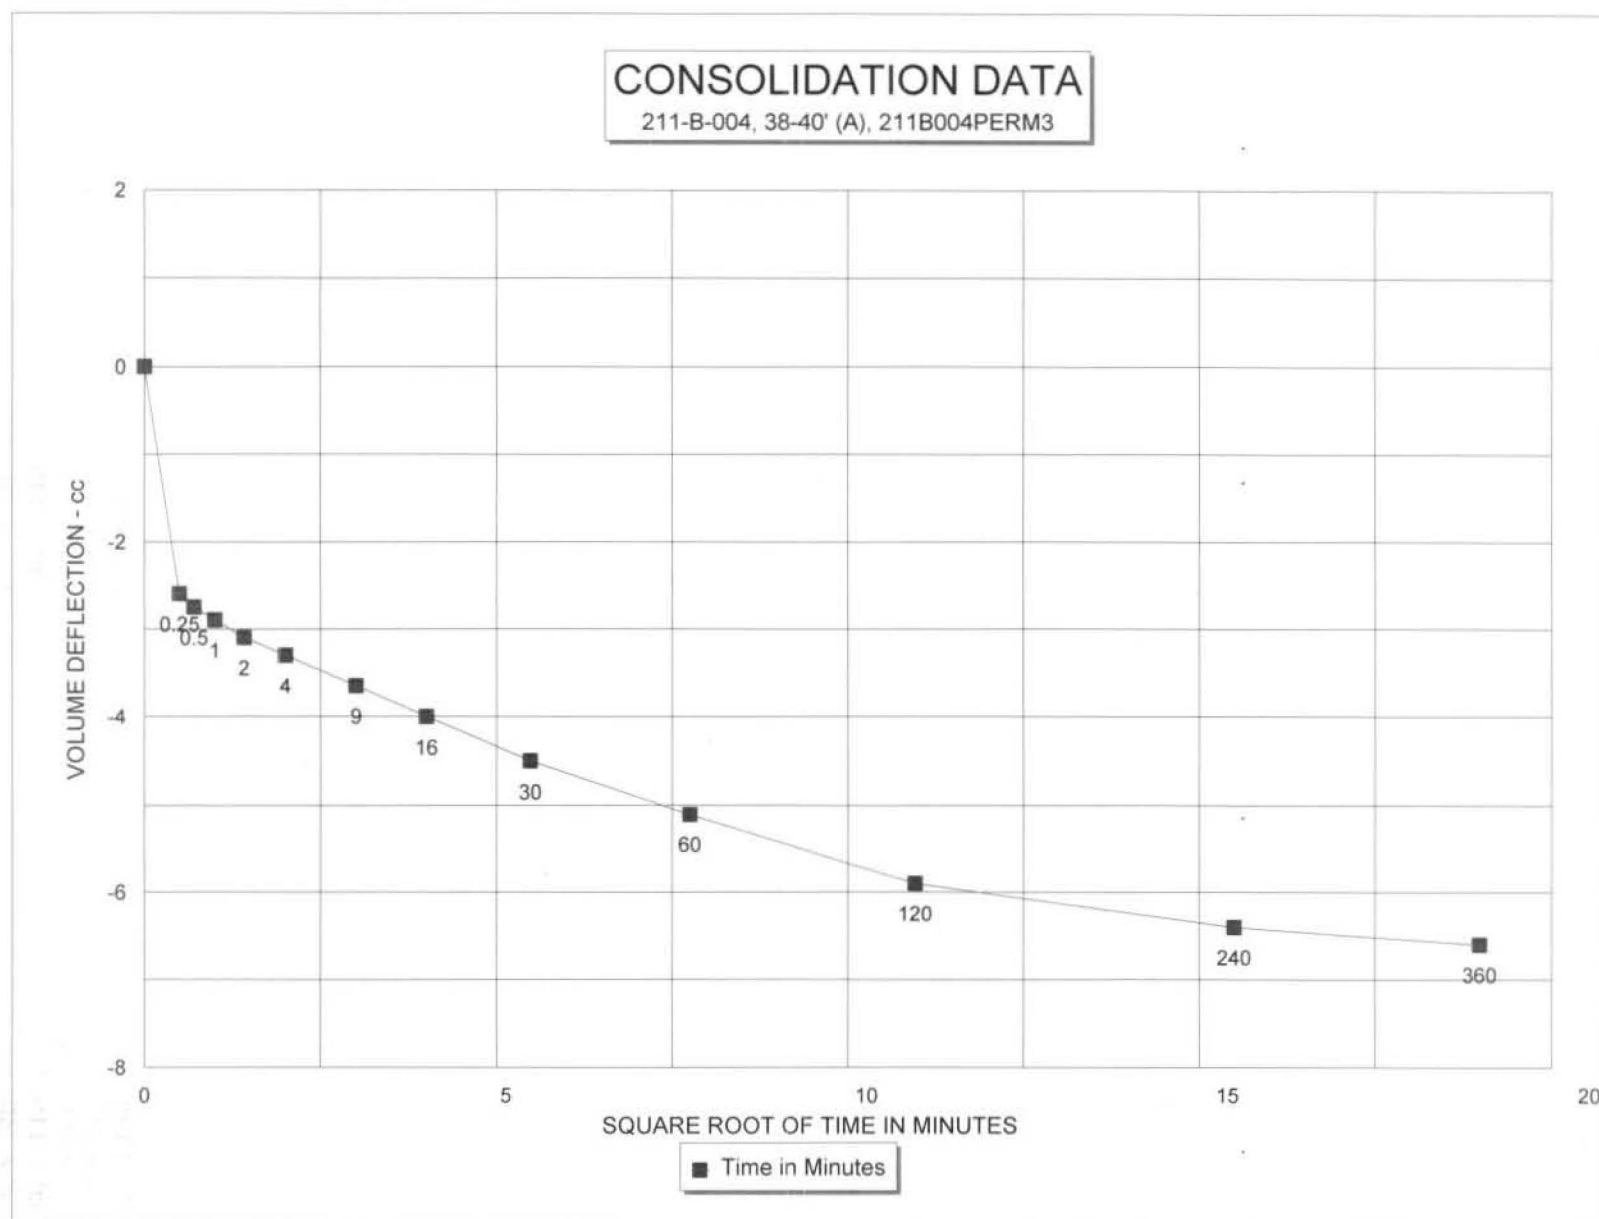

Preliminary Flow Pump Data

LATA-KY, SW Plume RDSI Geotech., 211B004PERM3

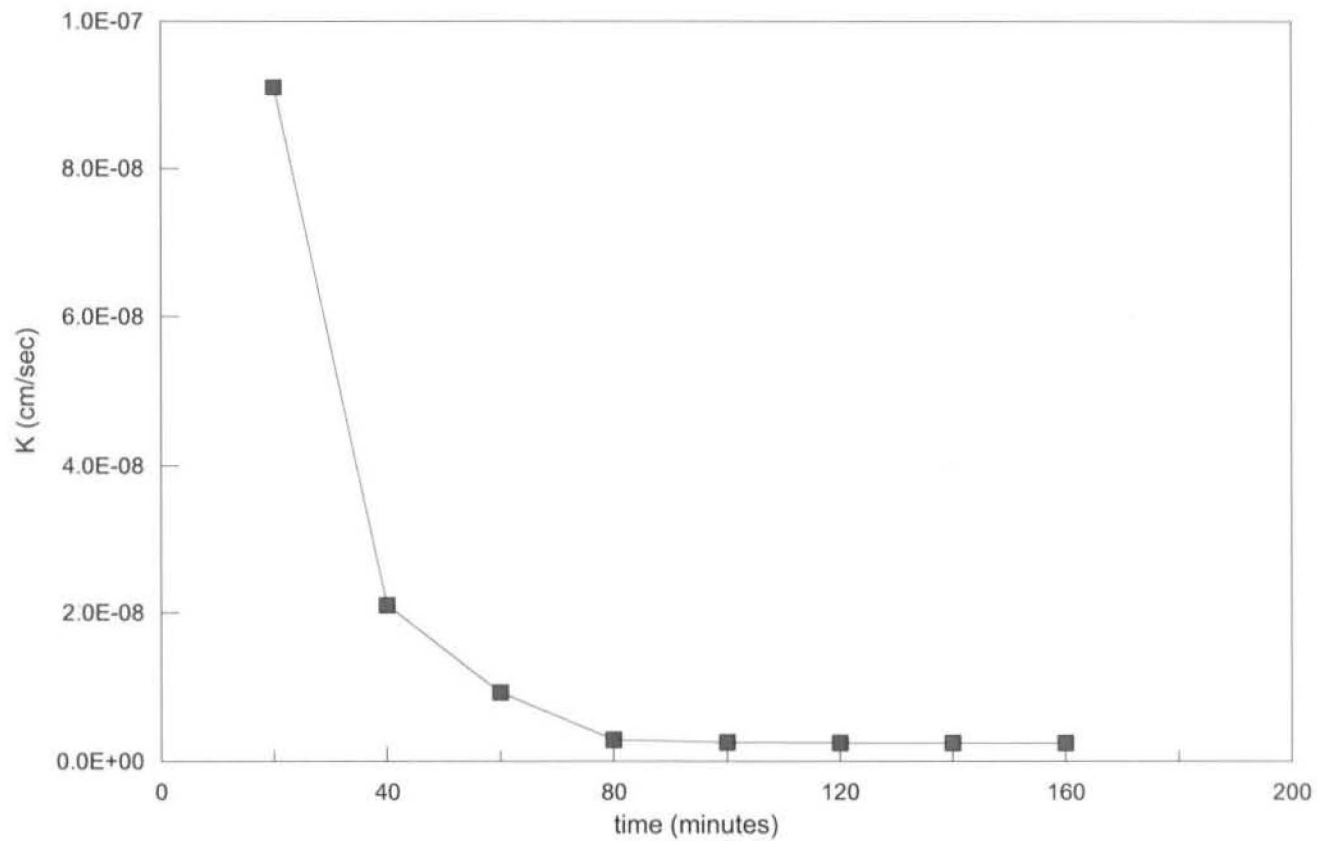


Average last 4 values
2.5E-09

Data Entered By:
Data Checked By:
File Name:

CAL
[Signature]
LKFP0043

Date: 11-13-2012
Date Checked 11/14/12



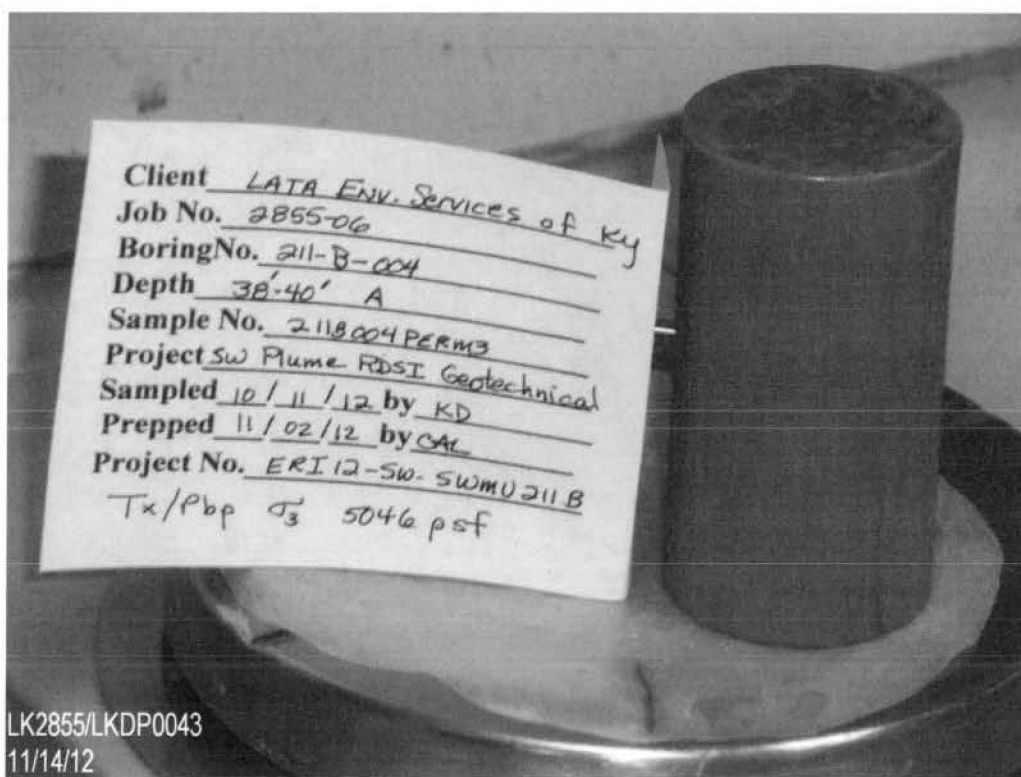

PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services-Ky

JOB NO. 2855-02

BORING NO.	MW516	SAMPLED	8/22/12 CB
DEPTH	10-12'	TEST STARTED	9/13/12 CAL
SAMPLE NO.	MW516Perm1	TEST FINISHED	9/22/12 CAL
PROJECT NO.	ERI12-SW-SWMU211B	CELL NUMBER	27S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	1423	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	688.7	696.0	
Wt. Wet Soil & Pan (g)	695.2	702.5	
Wt. Dry Soil & Pan (g)	604.7	604.7	
Wt. Lost Moisture (g)	90.5	97.8	
Wt. of Pan Only (g)	6.5	6.5	
Wt. of Dry Soil (g)	598.2	598.2	
Moisture Content %	15.1	16.3	
Wet Density PCF	134.1	137.6	
Dry Density PCF	116.5	118.3	
Init. Diameter (in)	2.847	(cm)	7.231
Init. Area (sq in)	6.366	(sq cm)	41.073
Init. Height (in)	3.073	(cm)	7.805
Vol. Bef. Consol. (cu ft)	0.01132		
Vol. After Consol. (cu ft)	0.01115		
Porosity %	30.97		

FLOW PUMP CALCULATIONS

Pump Setting	99
Velocity CM/Sec	6.50E-04
Q (cc/s)	2.08E-05
Height	3.058
Diameter	2.832
Pressure (psi)	0.064
Area after consol. (cm*cm)	40.644
Gradient	0.579
Permeability k (cm/s)	8.8E-07
Permeability k (m/s)	8.8E-09
Back Pressure (psi)	48.0
Cell Pressure (psi)	57.9
Ave. Effective Stress (psi)	9.868
Average temperature degree C:	23.4

Data entry by: MLM Date: 09/24/2012
 Checked by: cm Date: 9/25/12
 FileName: LKP05161



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services-Ky	JOB NO.	2855-02
BORING NO.	MW516	SAMPLED	8/22/12 CB
DEPTH	10-12'	TEST STARTED	9/13/12 CAL
SAMPLE NO.	MW516Perm1	TEST FINISHED	9/22/12 CAL
PROJECT NO.	ERI12-SW-SWMU211B	SETUP NO.	27S
LOCATION	SW Plume RDSi Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF.	1423	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	3.4	15.4		
50.0	48.0	17.2	18.8	9.3	0.93
60.0		19.8	19.9	9.9	0.99

CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	1.80	0.00
0.25	0.50	3.50	-1.70
0.5	0.71	3.75	-1.95
1	1.00	4.00	-2.20
2	1.41	4.30	-2.50
4	2.00	4.65	-2.85
9	3.00	4.90	-3.10
16	4.00	5.10	-3.30
34	5.83	5.20	-3.40
60	7.75	5.30	-3.50
120	10.95	5.40	-3.60
240	15.49	5.50	-3.70
360	18.97	5.50	-3.70


Initial Height (in)	3.073	Init. Vol. (CC)	320.63
Height Change (in)	0.015	Vol. Change (CC)	22.00
Ht. After Cons. (in)	3.058	Cell Exp. (CC)	17.12
Initial Area (sq in)	6.366	Net Change (CC)	4.88
Area After Cons. (sq in)	6.300	Cons. Vol. (CC)	315.75

Data entry by: MLM Date: 09/24/2012
 Checked by: OK Date: 9/25/12
 FileName: LKP05161




CONSOLIDATION DATA

MW516, 10-12', MW516Perm1

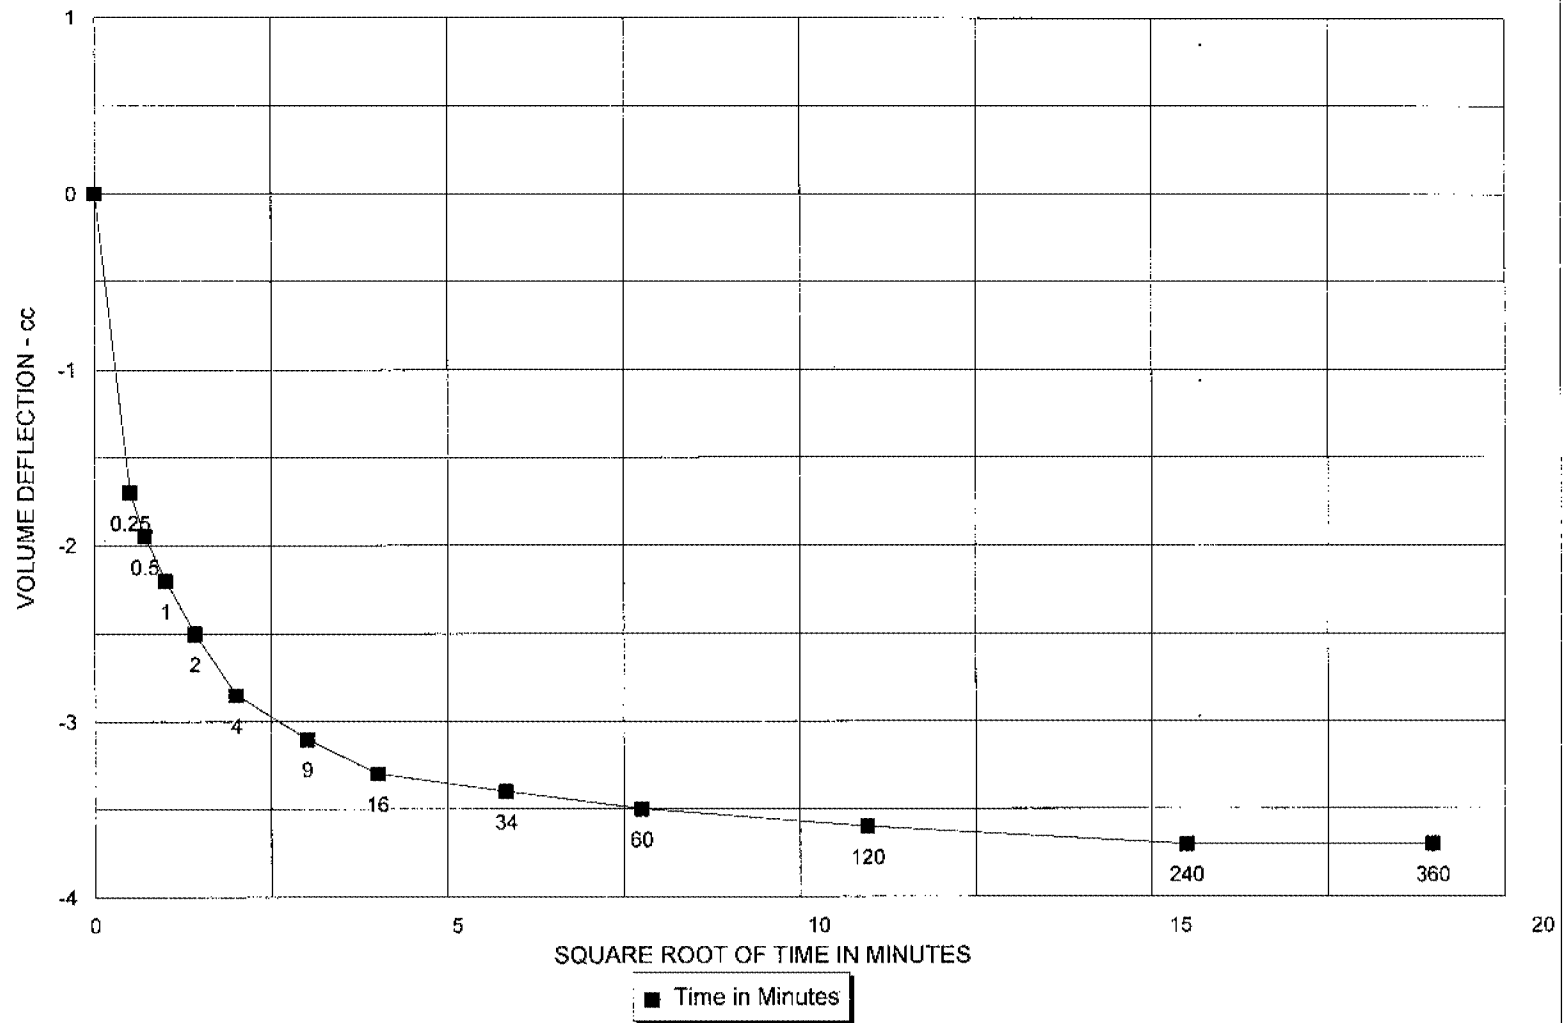

Preliminary Flow Pump Data

LATA-KY, MW516PERM1, 10-12'

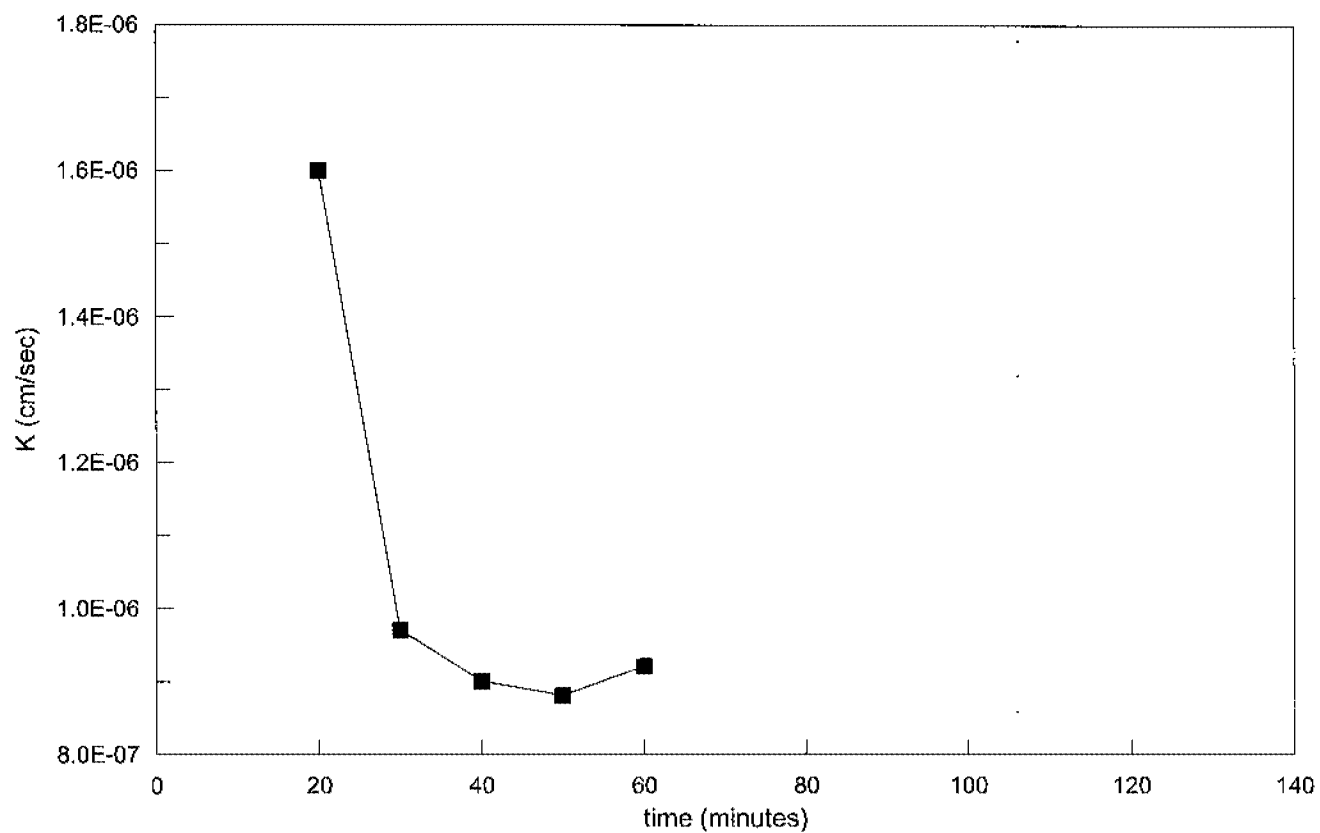

Average last 4 values
9.2E-07

Data Entered By:
Data Checked By:
File Name:

CAL
mm
LKFP5161

Date: 9/22/2012
Date Checked 9/24/12



PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services-Ky

JOB NO. 2855-02

BORING NO.	MW-516	SAMPLED	8/22/12 CB
DEPTH	25-26'	TEST STARTED	9/13/12 CAL
SAMPLE NO.	MW516PERM2	TEST FINISHED	9/25/12 CAL
PROJECT NO.	ERI12-SW-SWMU211B	CELL NUMBER	26S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	3299	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST
Wt. Soil + Moisture (g)	647.0	654.8
Wt. Wet Soil & Pan (g)	653.5	661.3
Wt. Dry Soil & Pan (g)	569.2	569.2
Wt. Lost Moisture (g)	84.3	92.1
Wt. of Pan Only (g)	6.5	6.5
Wt. of Dry Soil (g)	562.7	562.7
Moisture Content %	15.0	16.4
Wet Density PCF	127.0	137.3
Dry Density PCF	110.4	117.9

Init. Diameter (in)	2.841	(cm)	7.216
Init. Area (sq in)	6.339	(sq cm)	40.900
Init. Height (in)	3.062	(cm)	7.777
Vol. Bef. Consol. (cu ft)	0.01123		
Vol. After Consol. (cu ft)	0.01052		
Porosity %	30.92		

FLOW PUMP CALCULATIONS

Pump Setting (gear number)	12
Percentage of Pump setting	100
Q (cc/s)	2.30E-05
Height	2.985
Diameter	2.784
Pressure (psi)	1.414
Area after consol. (cm*cm)	39.280
Gradient	13.112
Permeability k (cm/s)	4.5E-08
Permeability k (m/s)	4.5E-10
Back Pressure (psi)	48.0
Cell Pressure (psi)	71.0
Ave. Effective Stress (psi)	22.293
Average temperature degree C:	22.9

Data entry by: MLM Date: 09/26/2012
 Checked by: cm Date: 9/26/12
 FileName: LKP05162



TRIAxAL COMPRESSION TEST DATA

CLIENT LATA Environmental Services-Ky

JOB NO. 2855-02

BORING NO. MW-516

SAMPLED 8/22/12 CB

DEPTH 25-26'

TEST STARTED 9/13/12 CAL

SAMPLE NO. MW516PERM2

TEST FINISHED 9/25/12 CAL

PROJECT NO. ERI12-SW-SWMU211B

SETUP NO. 26S

LOCATION SW Plume RDSI Geotechnical

SATURATED TEST Yes

CONF. PRES. PSF 3299

TEST TYPE TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)		Pore Pressure (PSI)		Change	B
		Close	Open	Close	Open		
40.0	38.0	6.3	21.9				
50.0	48.0	25.6	26.9	38.6	47.7	9.1	0.91
60.0		27.2	27.4	48.8	58.3	9.5	0.95

CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.20	0.00
0.25	0.50	5.90	-5.70
0.5	0.71	6.60	-6.40
1	1.00	7.50	-7.30
2	1.41	8.40	-8.20
4	2.00	9.40	-9.20
9	3.00	10.60	-10.40
16	4.00	11.40	-11.20
30	5.48	12.40	-12.20
60	7.75	13.50	-13.30
120	10.95	14.40	-14.20
240	15.49	15.00	-14.80
360	18.97	15.10	-14.90


Initial Height (in)	3.062	Init. Vol. (CC)	318.14
Height Change (in)	0.077	Vol. Change (CC)	38.20
Ht. After Cons. (in)	2.985	Cell Exp. (CC)	17.93
Initial Area (sq in)	6.339	Net Change (CC)	20.27
Area After Cons. (sq in)	6.088	Cons. Vol. (CC)	297.87

Data entry by: MLM Date: 09/26/2012
 Checked by: CLC Date: 9/26/12
 FileName: LKP05162




CONSOLIDATION DATA

MW-516, 25-26', MW516PERM2

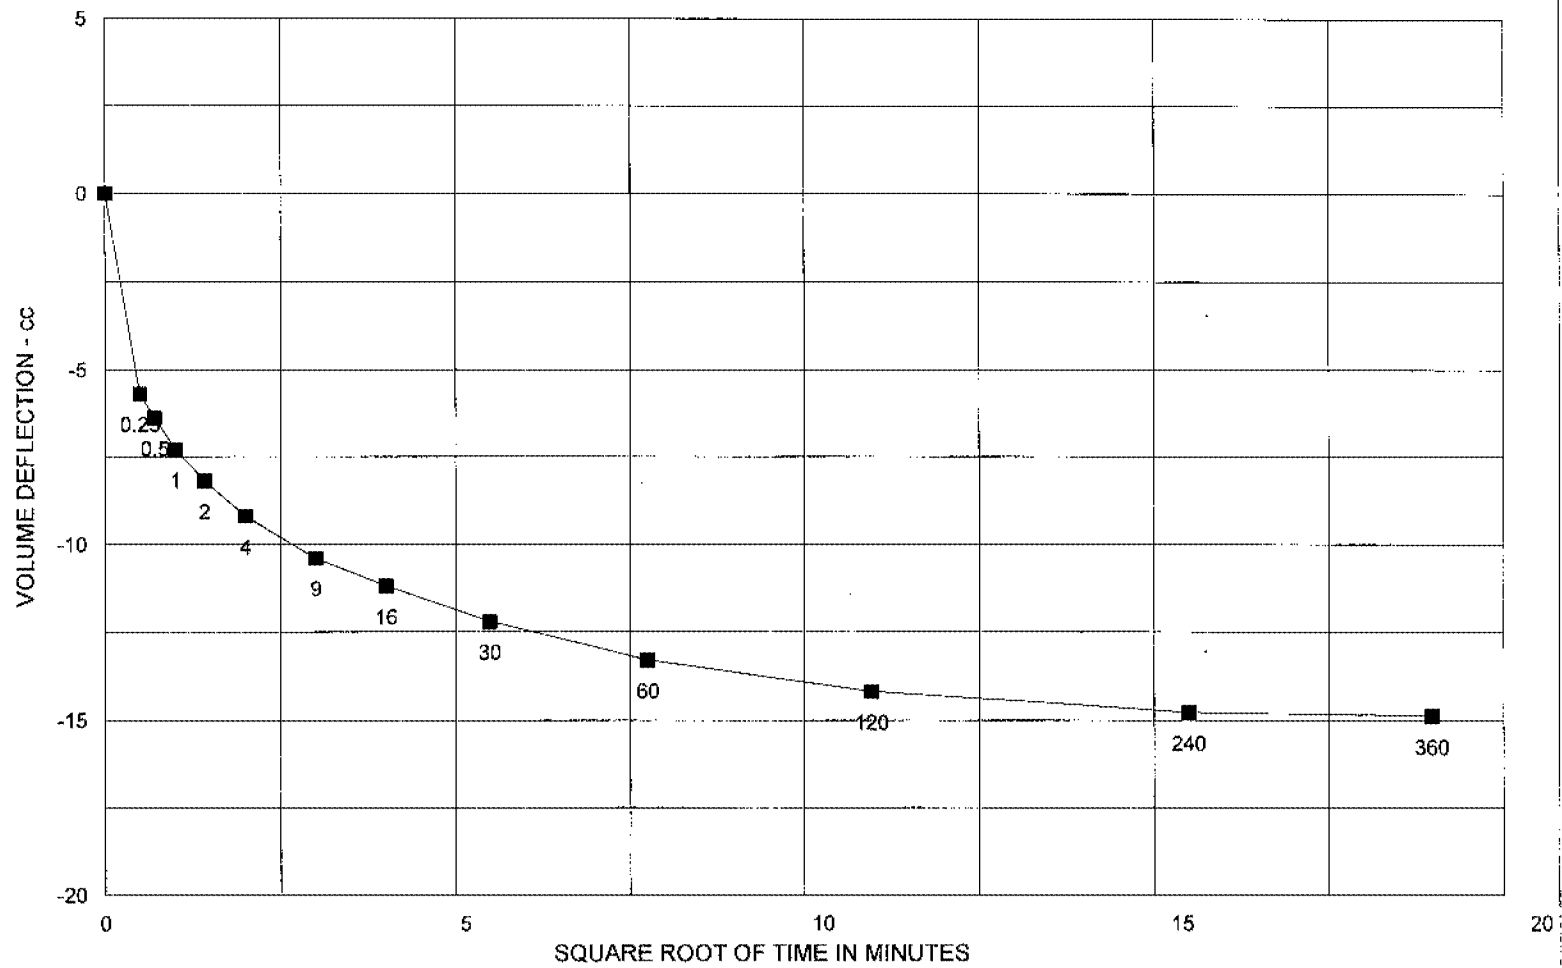

■ Time in Minutes

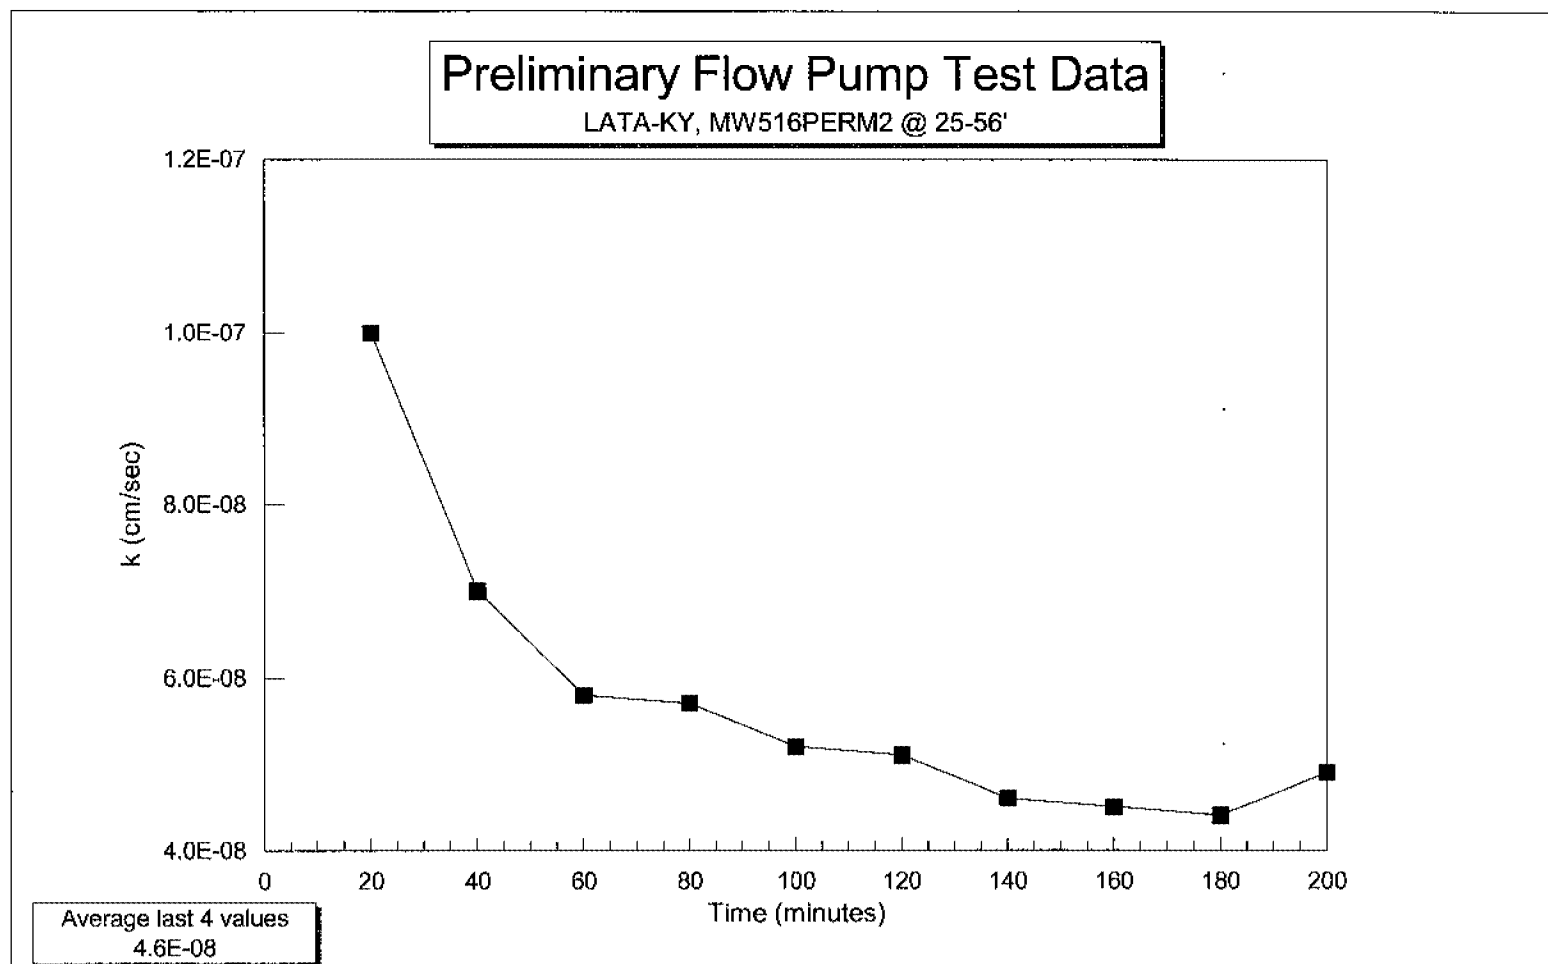

Data Entered By: CAL
Data Checked By: gm
File Name: LKFP5162

Date: 9/25/2012
Date Checked: 9/26/12



PERMEABILITY TEST - BACK PRESSURE SATURATED - FLOW PUMP METHOD
ASTM D 5084

CLIENT LATA Environmental Services-Ky

JOB NO. 2855-02

BORING NO.	MW516	SAMPLED	8/23/12 KD
DEPTH	40-42'	TEST STARTED	9/13/12 CAL
SAMPLE NO.	MW516PERM3	TEST FINISHED	9/15/12 CAL
PROJECT NO.	ERI12-SW-SWMU211B	CELL NUMBER	15S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	5305	TEST TYPE	TX/Pbp/Tap Water

MOISTURE/DENSITY DATA	BEFORE TEST	AFTER TEST	
Wt. Soil + Moisture (g)	706.5	704.6	
Wt. Wet Soil & Pan (g)	713.1	711.2	
Wt. Dry Soil & Pan (g)	617.5	617.5	
Wt. Lost Moisture (g)	95.6	93.7	
Wt. of Pan Only (g)	6.6	6.6	
Wt. of Dry Soil (g)	610.9	610.9	
Moisture Content %	15.7	15.3	
Wet Density PCF	134.8	140.4	
Dry Density PCF	116.5	121.7	
Init. Diameter (in)	2.862	(cm)	7.269
Init. Area (sq in)	6.433	(sq cm)	41.507
Init. Height (in)	3.104	(cm)	7.884
Vol. Bef. Consol. (cu ft)	0.01156		
Vol. After Consol. (cu ft)	0.01106		
Porosity %	29.92		

FLOW PUMP CALCULATIONS

Pump Setting	45
Velocity CM/Sec	2.95E-04
Q (cc/s)	9.44E-06
Height	3.081
Diameter	2.811
Pressure (psi)	0.240
Area after consol. (cm*cm)	40.026
Gradient	2.156
Permeability k (cm/s)	1.1E-07
Permeability k (m/s)	1.1E-09
Back Pressure (psi)	38.0
Cell Pressure (psi)	74.8
Ave. Effective Stress (psi)	36.680
Average temperature degree C:	23.0

Data entry by: MLM Date: 09/17/2012
 Checked by: Ca Date: 9/22/12
 FileName: LKP05163



TRIAXIAL COMPRESSION TEST DATA

CLIENT	LATA Environmental Services-Ky	JOB NO.	2855-02
BORING NO.	MW516	SAMPLED	8/23/12 KD
DEPTH	40-42'	TEST STARTED	9/13/12 CAL
SAMPLE NO.	MW516PERM3	TEST FINISHED	9/15/12 CAL
PROJECT NO.	ERI12-SW-SWMU211B	SETUP NO.	15S
LOCATION	SW Plume RDSI Geotechnical	SATURATED TEST	Yes
CONF. PRES. PSF	5305	TEST TYPE	TX/Pbp/Tap Water

SATURATION DATA

Cell Pres. (PSI)	Back Pres. (PSI)	Burette Reading (CC)	Pore Pressure (PSI)	Change	B
		Close Open	Close Open		
40.0	38.0	3.0	12.8		
50.0		13.5	13.7	39.1	48.7
				9.6	0.96

CONSOLIDATION DATA

Elapsed Time (Min)	SQRT Time (Min)	Burette Reading (CC)	Volume Defl. (cc)
0.00	0.00	0.50	0.00
0.25	0.50	5.35	-4.85
0.5	0.71	5.70	-5.20
1	1.00	6.30	-5.80
2	1.41	7.10	-6.60
4	2.00	8.30	-7.80
9	3.00	9.70	-9.20
16	4.00	10.40	-9.90
30	5.48	11.05	-10.55
60	7.75	11.35	-10.85
120	10.95	11.60	-11.10
240	15.49	12.00	-11.50
360	18.97	12.20	-11.70


Initial Height (in)	3.104	Init. Vol. (CC)	327.29
Height Change (in)	0.023	Vol. Change (CC)	24.00
Ht. After Cons. (in)	3.081	Cell Exp. (CC)	10.00
Initial Area (sq in)	6.433	Net Change (CC)	14.00
Area After Cons. (sq in)	6.204	Cons. Vol. (CC)	313.29

Data entry by: MLM Date: 09/17/2012
 Checked by: cm Date: 9/22/12
 FileName: LKP05163




CONSOLIDATION DATA

MW516, 40-42', MW516PERM3

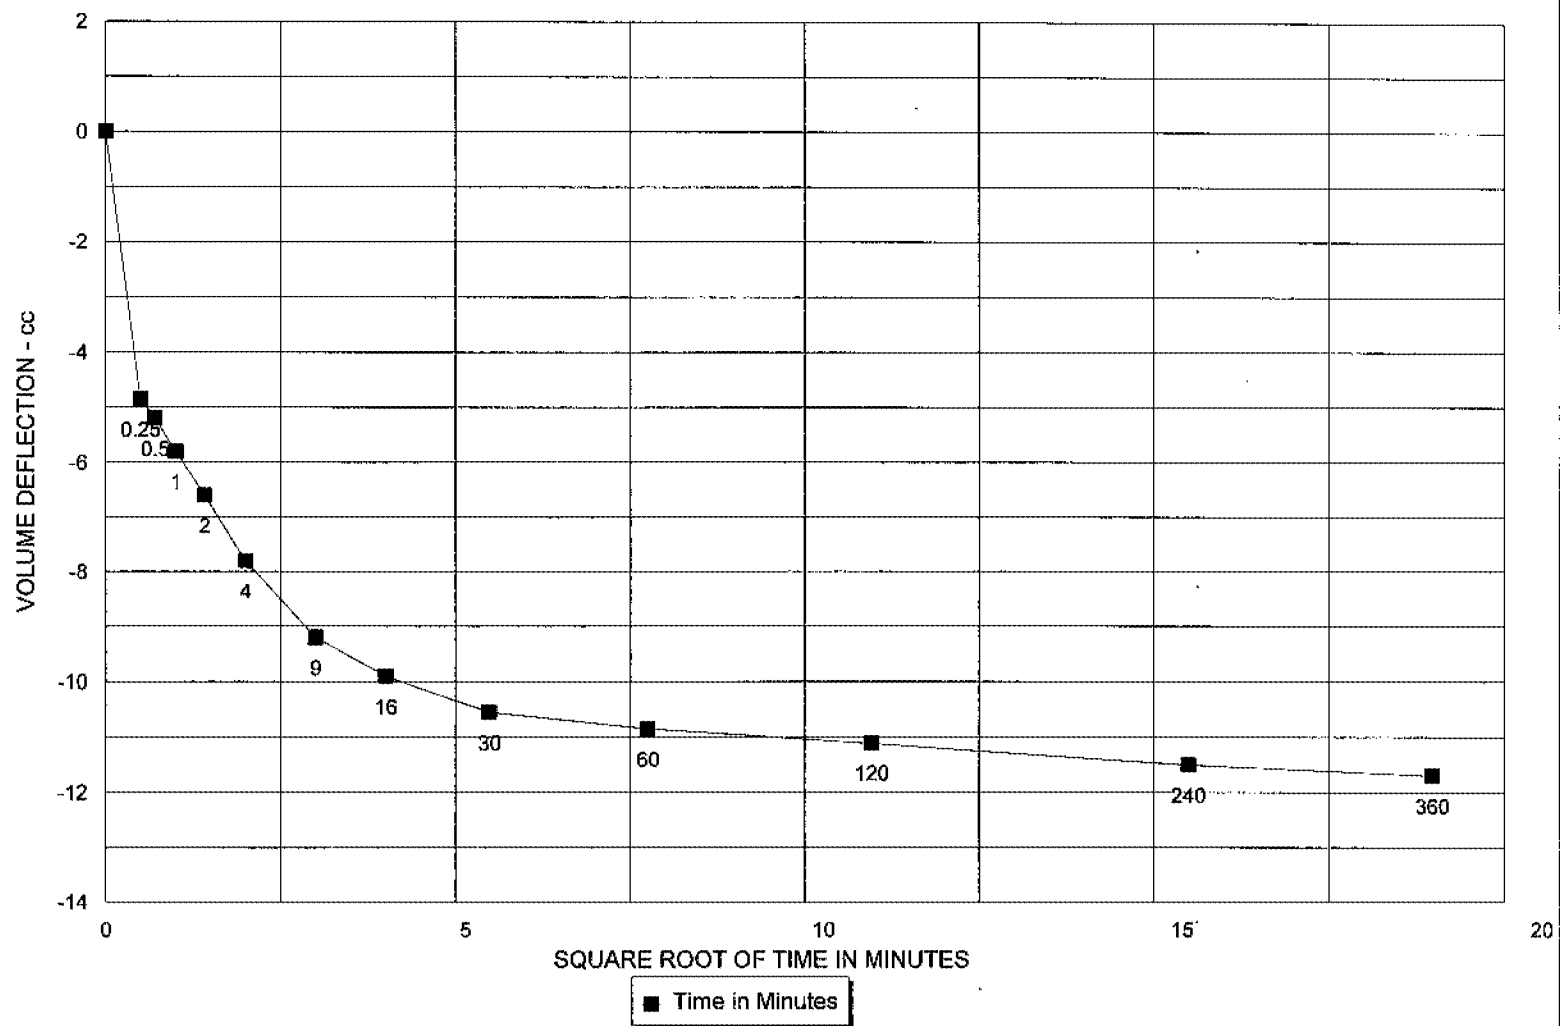

Preliminary Flow Pump Data

LATA-KY, MW516PERM3 @ 40-42'

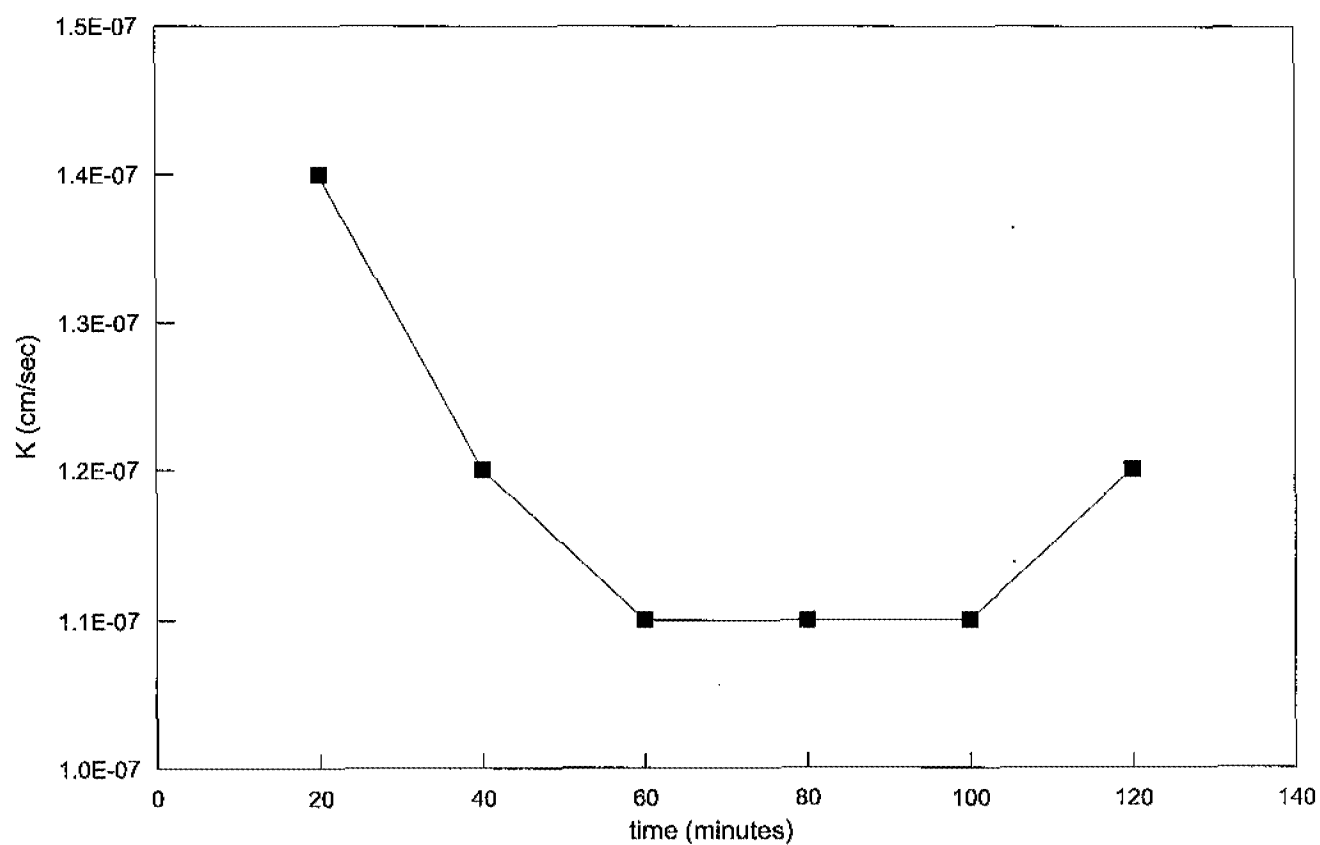

Average last 4 values
1.1E-07

Data Entered By:
Data Checked By:
File Name:

CAL
[Signature]
LKFP5163

Date: 9/15/2012
Date Checked *9/17/12*



WELL INJECTION TEST RECORD

DATE	10/23/2012	TIME	11:40	WELL ID	MW-511
ADJ WELL	MW-513	TECH	J. Brownfield	RECD BY	T. Mills

TIME	FLOW (gpm)	PRESS (psi)	DTW Adj Well		TIME	FLOW	PRESS	DTW Adj Well
11:40	2.5	25	16.63					
11:43	2.2	25	13.31					
11:46	2.2	25	12.89					
11:49	2.2	25	12.78					
11:52	3.1	50	12.42					
11:55	3.1	50	11.85					
11:58	3.1	50	11.67					
12:01	3.9	75	11.14					
12:04	3.9	75	10.37					
12:07	3.9	75	9.79					
12:10	4.8	100	9.55					
12:13	4.8	100	9.42					
12:16	4.8	100	9.42					
Test Complete per Ken Davis								

WELL INJECTION TEST RECORD

DATE	10/23/2012	TIME	12:30	WELL ID	MW-512
ADJ WELL	N/A	TECH	J. Brownfield	RECD BY	T. Mills

TIME	FLOW (gpm)	PRESS (psi)	DTW Adj Well		TIME	FLOW	PRESS	DTW Adj Well
12:35	2.3	25	N/A					
12:38	1.5	25	N/A					
12:41	1.5	25	N/A					
12:44	2.0	25	N/A					
12:47	2.2	25	N/A					
12:50	2.2	25	N/A					
12:53	2.2	25	N/A					
12:56	3.3	50	N/A					
12:59	3.3	50	N/A					
13:02	3.3	50	N/A					
13:05	4.1	75	N/A					
13:08	4.1	75	N/A					
13:11	4.2	75	N/A					
13:14	4.7	100	N/A					
13:17	4.7	100	N/A					
13:20	4.7	100	N/A					
Test Complete per Ken Davis								

WELL INJECTION TEST RECORD

DATE	10/23/2012	TIME	9:00	WELL ID	MW-513
ADJ WELL	MW-511	TECH	J. Brownfield	RECD BY	T. Mills

TIME	FLOW (gpm)	PRESS (psi)	DTW Adj Well		TIME	FLOW	PRESS	DTW Adj Well
9:30	1.5	25	7.48					
9:33	0.5	25	7.48					
9:36	0.7	25	6.03					
9:39	0.9	25	5.96					
9:42	1.0	25	5.90					
9:45	1.0	25	5.89					
9:48	1.0	25	5.87					
9:51	1.9	50	5.81					
9:54	1.9	50	5.81					
Test Paused Due To Equipment Issue								
10:10	1.9	50	5.97					
10:13	2.0	50	5.97					
10:16	2.1	50	6.01					
10:19	3.0	75	5.27					
10:22	3.0	75	4.11					
10:25	3.1	75	0.00					
Test Complete per Ken Davis								

WELL INJECTION TEST RECORD

DATE	10/23/2012	TIME	15:05	WELL ID	MW-514
ADJ WELL	MW-515 MW-516	TECH	J. Brownfield	RECD BY	T. Mills

TIME	FLOW (gpm)	PRESS (psi)	DTW Adj Well		TIME	FLOW	PRESS	DTW Adj Well
15:10	2.3	25	1.20/14.28					
15:13	2.3	25	0.0/13.27					
15:16	2.3	25	0.0/12.91					
15:19	2.4	50	0.0/12.67					
15:22	2.4	50	0.0/12.42					
15:25	2.5	50	0.0/12.29					
15:28	3.1	75	0.0/11.99					
13:31	3.1	75	0.0/11.93					
15:34	3.1	75	0.0/11.86					
15:37	3.4	100	0.0/11.78					
15:40	3.4	100	0.0/11.76					
15:43	3.4	100	0.0/11.74					
Test Complete Per Ken Davis								

WELL INJECTION TEST RECORD

DATE	10/23/2012		TIME	13:35	WELL ID	MW-515
ADJ WELL	MW-514	MW-516	TECH	J. Brownfield	RECD BY	T. Mills

TIME	FLOW (gpm)	PRESS (psi)	DTW Adj Well		TIME	FLOW	PRESS	DTW Adj Well
13:38	2.5	25	8.49/22.31					
13:41	1.7	25	8.37/20.91					
13:44	1.6	25	5.95/20.98					
13:47	1.7	25	0.0/21.46					
13:50	2.8	50	0.0/21.62					
13:53	2.9	50	0.0/21.73					
13:56	2.9	50	0.0/21.82					
13:59	3.8	75	0.0/21.90					
14:02	3.7	75	0.0/21.98					
14:05	3.7	75	0.0/22.02					
14:08	4.5	100	0.0/22.10					
14:11	4.5	100	0.0/22.14					
14:14	4.5	100	0.0/22.16					
Test Complete per Ken Davis								

WELL INJECTION TEST RECORD

DATE	10/23/2012	TIME	14:20	WELL ID	MW-516
ADJ WELL	MW-515 MW-514	TECH	J. Brownfield	RECD BY	T. Mills

TIME	FLOW (gpm)	PRESS (psi)	DTW Adj Well		TIME	FLOW	PRESS	DTW Adj Well
14:20	2.0	25	4.21/5.25					
14:23	1.9	25	0.0/0.81					
14:26	1.9	25	0.0/0.81					
14:29	1.9	25	0.0/0.79					
14:32	3.1	50	0.0/0.80					
14:35	3.1	50	0.0/0.84					
14:38	3.1	50	0.0/0.85					
14:41	3.1	75	0.0/0.81					
14:44	3.1	75	0.0/<0.70					
14:47	3.1	75	0.0/<0.50					
14:50	3.3	100	0.0/0.0					
14:53	3.3	100	0.0/0.0					
14:56	4.3	100	0.0/0.0					
14:59	4.3	100	0.0/0.0					
15:02	4.3	100	0.0/0.0					
Test Complete Per Ken Davis								

APPENDIX G

SUMMARY OF SOILS VOC DATA FOR SWMU 211-B

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX G

SUMMARY OF SOILS VOC DATA FOR SWMU 211-B

THIS PAGE INTENTIONALLY LEFT BLANK

Summary of Soils VOC Data for SWMU 211-B

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-001	10/9/2012	4.9	27	1.5 U	0.56 U	0.87 U	0.4 U
		8.5	78	1.8 U	0.71 J	1.1 U	0.49 U
		10.5	150	1.6 U	0.78 J	0.93 U	0.42 U
		(10.5)DUP	100	1.7 U	0.62 U	0.98 U	0.45 U
		19.5	91	1.4 U	0.52 U	0.81 U	0.37 U
		23	1,700	22 U	9.5 U	7.4 U	25 U
		25.1	19	1.9 U	0.7 U	1.1 U	0.5 U
		34	15	2 U	0.74 U	1.2 U	0.53 U
		39.5	93	1.6 U	0.61 U	0.95 U	0.43 U
		44	310	25 U	11 U	8.3 U	28 U
		49.5	61	1.6 U	0.59 U	0.92 U	0.42 U
		53	84	1.8 U	0.68 U	1.1 U	0.49 U
		55.5	24	2 U	0.73 U	1.1 U	0.52 U
		60.5	1.2 J	1.7 U	0.62 U	0.97 U	0.44 U
		Average	197	***	1	***	***
211-B-002	10/10/2012	3	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		9	0.36 U	1.5 U	0.56 U	0.87 U	0.4 U
		14	0.35 U	1.4 U	0.53 U	0.83 U	0.38 U
		18.5	2.2 J	2.1 U	0.77 U	1.2 U	0.55 U
		21	170 J	23 U	9.8 U	7.6 U	26 U
		29	1.8 J	1.5 U	0.55 U	0.87 U	0.4 U
		31.5	52	1.8 U	0.68 U	1.1 U	0.49 U
		35.5	210	1.7 U	0.64 U	1 U	0.46 U
		44.5	93	1.6 U	0.61 U	0.95 U	0.43 U
		47.5	23	1.5 U	0.58 U	0.9 U	0.41 U
		50.5	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		59.5	4.1 J	1.9 U	0.72 U	1.1 U	0.52 U
		62.5	1.8 J	2.1 U	0.78 U	1.2 U	0.56 U
		Average	43	***	***	***	***

Summary of Soils VOC Data for SWMU 211-B (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-003	10/10/2012	4	0.41 U	1.7 U	0.63 U	0.98 U	0.45 U
		9	0.41 U	1.7 U	0.63 U	0.98 U	0.45 U
		14.5	1 J	1.6 U	0.6 U	0.93 U	0.43 U
		19.5	0.46 J	1.4 U	0.51 U	0.8 U	0.37 U
		(19.5)DUP	0.5 J	1.5 U	0.56 U	0.88 U	0.4 U
		23	0.35 U	1.4 U	0.54 U	0.84 U	0.38 U
		28.5	0.33 U	1.4 U	0.51 U	0.79 U	0.36 U
		34	0.87 J	1.3 U	0.5 U	0.78 U	0.36 U
		39	17	1.6 U	0.61 U	0.95 U	0.43 U
		40.5	19	1.4 U	0.51 U	0.8 U	0.37 U
		49.5	17	1.7 U	0.64 U	1 U	0.46 U
		52	61	1.7 U	0.63 U	0.99 U	0.45 U
		58.5	9 J	1.5 U	0.55 U	0.86 U	0.39 U
	Average		10	***	***	***	***
211-B-004	10/11/2012	3.5	12	1.4 U	1.4 J	0.8 U	0.37 U
		7	30	1.6 U	20	0.93 U	0.42 U
		14.5	1,800	25 U	66 J	8.3 U	28 U
		17.5	72	1.6 U	4.2 J	0.96 U	0.44 U
		20.1	380	25 U	11 U	8.5 U	29 U
		25.5	920	21 U	9 U	7 U	24 U
		30.1	900	27 U	11 U	8.9 U	30 U
		35.1	250	24 U	10 U	7.9 U	27 U
		41	620	24 U	10 U	8 U	27 U
		49.9	270	23 U	9.8 U	7.7 U	26 U
		51	19 U	26 U	11 U	8.8 U	30 U
		55.1	75	1.5 U	0.57 U	0.9 U	0.41 U
		62	100 J	23 U	10 U	7.8 U	26 U
	Average		418	***	10	***	***

Summary of Soils VOC Data for SWMU 211-B (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-005	10/15/2012	4.9	46	1.8 U	6.8 J	1 U	0.47 U
		5.1	71	1.7 U	8.3 J	0.97 U	0.45 U
		13.5	340	26 U	11 U	8.6 U	29 U
		18	130	1.8 U	0.66 U	1 U	0.47 U
		23	3,100	24 U	10 U	7.9 U	27 U
		(29.5)DUP	2,900	33 U	14 U	11 U	38 U
		29.5	700	23 U	10 U	7.9 U	27 U
		30.5	1,400	32 U	14 U	11 U	36 U
		35.5	380	26 U	11 U	8.6 U	29 U
		40.5	1,500	28 U	12 U	9.6 U	32 U
		48	690	23 U	10 U	7.8 U	26 U
		50.5	360	26 U	11 U	8.7 U	30 U
		59	340	25 U	11 U	8.5 U	29 U
		60.1	120 J	46 U	20 U	15 U	52 U
		Average	863	***	6	***	***
211-B-006	10/15/2012	4.5	0.41 U	1.7 U	0.63 U	0.98 U	0.45 U
		9	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		13.5	4.7 J	1.6 U	0.61 U	0.95 U	0.43 U
		17.5	29	1.6 U	0.59 U	0.92 U	0.42 U
		21	92	1.9 U	0.7 U	1.1 U	0.5 U
		29.5	25	1.7 U	0.64 U	1 U	0.46 U
		31	3.3 J	2 U	0.73 U	1.1 U	0.52 U
		37.5	4 J	1.5 U	0.56 U	0.87 U	0.4 U
		44.9	14	1.6 U	0.59 U	0.93 U	0.43 U
		49.5	11	1.8 U	0.67 U	1 U	0.48 U
		52.5	7.6 J	1.7 U	0.62 U	0.98 U	0.45 U
		59	1.2 J	1.7 U	0.65 U	1 U	0.46 U
		62	0.47 U	1.9 U	0.73 U	1.1 U	0.52 U
		Average	15	***	***	***	***

Summary of Soils VOC Data for SWMU 211-B (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-007	10/16/2012	2.5	0.35 U	1.4 U	0.54 U	0.85 U	0.39 U
		5.5	0.32 U	1.3 U	0.49 U	0.77 U	0.35 U
		11	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		17.5	0.4 U	1.7 U	0.62 U	0.97 U	0.44 U
		23	0.98 J	1.5 U	0.55 U	0.86 U	0.39 U
		(23)DUP	0.73 J	1.4 U	0.52 U	0.82 U	0.37 U
		25.1	0.51 J	1.4 U	0.53 U	0.83 U	0.38 U
		33.5	15	1.6 U	0.61 U	0.95 U	0.44 U
		35.5	7.4 J	1.5 U	0.56 U	0.88 U	0.4 U
		44.5	9.7 J	1.6 U	0.59 U	0.93 U	0.42 U
		49	0.35 U	1.4 U	0.54 U	0.84 U	0.39 U
		53.5	7.3 J	1.7 U	0.64 U	0.99 U	0.46 U
		55.1	6.3 J	1.7 U	0.63 U	0.99 U	0.45 U
		60.1	5.1 J	1.6 U	0.61 U	0.96 U	0.44 U
	Average		4	***	***	***	***
211-B-008	10/9/2012	0.5	0.42 U	1.7 U	0.65 U	1 U	0.46 U
		(8)DUP	0.37 U	1.5 U	0.57 U	0.89 U	0.41 U
		8	0.39 U	1.6 U	0.6 U	0.95 U	0.43 U
		12.5	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		16.5	0.35 U	1.5 U	0.54 U	0.85 U	0.39 U
		24	5.2 J	1.7 U	0.63 U	0.99 U	0.45 U
		28.5	0.36 U	1.5 U	0.55 U	0.86 U	0.39 U
		32	0.41 U	1.7 U	0.63 U	0.98 U	0.45 U
		37	0.39 U	1.6 U	0.61 U	0.95 U	0.43 U
		40.1	0.4 U	1.7 U	0.62 U	0.97 U	0.44 U
		48	0.37 U	1.5 U	0.56 U	0.88 U	0.4 U
		50.5	0.41 U	1.7 U	0.64 U	1 U	0.46 U
		58.5	0.43 U	1.8 U	0.66 U	1 U	0.47 U
		62.5	0.43 U	1.8 U	0.67 U	1 U	0.48 U
	Average		0.6	***	***	***	***

Summary of Soils VOC Data for SWMU 211-B (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-009	10/8/2012	4	3 J	1.8 U	0.66 U	1 U	0.47 U
		6.5	3.5 J	1.8 U	0.65 U	1 U	0.47 U
		14.5	10	1.6 U	0.87 J	0.92 U	0.42 U
		16	8.4 J	1.5 U	0.56 U	0.88 U	0.4 U
		22	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		28.5	1.9 J	1.6 U	0.59 U	0.93 U	0.42 U
		(34.5)DUP	0.46 U	1.9 U	0.7 U	1.1 U	0.5 U
		34.5	0.4 U	1.7 U	0.62 U	0.98 U	0.45 U
		36	0.35 U	1.4 U	0.54 U	0.84 U	0.39 U
		44	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		49.5	0.41 U	1.7 U	0.63 U	0.98 U	0.45 U
		51.5	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		59.5	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		62	0.4 U	1.6 U	0.61 U	0.96 U	0.44 U
		Average	2	***	0.3	***	***
211-B-010	10/5/2012	4	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		9.9	2.1 J	1.7 U	0.62 U	0.97 U	0.44 U
		14	8.4 J	1.5 U	0.63 J	0.86 U	0.39 U
		16	1.7 J	1.5 U	0.54 U	0.85 U	0.39 U
		20.5	2.4 J	1.5 U	0.57 U	0.89 U	0.41 U
		28.5	9.7 J	1.7 U	0.64 U	1 U	0.46 U
		31	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		39	2.3 J	1.5 U	0.55 U	0.86 U	0.4 U
		41	3.2 J	1.6 U	0.59 U	0.92 U	0.42 U
		46	3 J	1.5 U	0.55 U	0.86 U	0.39 U
		51.5	4 J	1.5 U	0.55 U	0.86 U	0.39 U
		59.5	1.7 J	1.6 U	0.58 U	0.91 U	0.42 U
		62	0.62 J	1.7 U	0.63 U	0.99 U	0.45 U
		Average	3	***	0.3	***	***

Summary of Soils VOC Data for SWMU 211-B (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-011	10/8/2012	4	0.41 U	1.7 U	0.63 U	0.99 U	0.45 U
		9	4.3 J	1.8 U	0.67 U	1.1 U	0.48 U
		14.5	15	1.4 U	0.54 U	0.84 U	0.38 U
		19.5	12	1.5 U	0.57 U	0.9 U	0.41 U
		20.5	15	1.3 U	0.5 U	0.78 U	0.36 U
		(20.5)DUP	5.8 J	1.5 U	0.56 U	0.87 U	0.4 U
		29.5	1.6 J	1.7 U	0.63 U	0.99 U	0.45 U
		32	0.36 U	1.5 U	0.55 U	0.87 U	0.4 U
		39	0.84 J	1.6 U	0.59 U	0.92 U	0.42 U
		44	1.5 J	1.5 U	0.56 U	0.87 U	0.4 U
		45.1	2.4 J	1.6 U	0.61 U	0.96 U	0.44 U
		51	2.2 J	1.4 U	0.53 U	0.83 U	0.38 U
		59	0.39 U	1.6 U	0.61 U	0.95 U	0.44 U
		64.9	2 J	1.7 U	0.64 U	1 U	0.46 U
		Average	5	***	***	***	***
211-B-012	10/4/2012	2	0.38 U	1.6 U	0.59 U	0.93 U	0.42 U
		5.5	0.38 U	1.6 U	0.58 U	0.92 U	0.42 U
		10.1	0.4 U	1.7 U	0.62 U	0.96 U	0.44 U
		15.1	0.34 U	1.4 U	0.52 U	0.82 U	0.38 U
		23.5	0.43 U	1.8 U	0.67 U	1 U	0.48 U
		29.5	0.36 U	1.5 U	0.56 U	0.88 U	0.4 U
		32	0.89 J	1.5 U	0.56 U	0.88 U	0.4 U
		39	4.6 J	1.9 U	0.7 U	1.1 U	0.5 U
		40.1	5.9 J	1.5 U	0.54 U	0.85 U	0.39 U
		49.9	0.39 U	1.6 U	0.6 U	0.93 U	0.43 U
		50.5	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		59	0.43 U	1.8 U	0.66 U	1 U	0.47 U
		61	0.39 U	1.6 U	0.6 U	0.94 U	0.43 U
		Average	1.0	***	***	***	***

Summary of Soils VOC Data for SWMU 211-B (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-013	10/4/2012	1.5	0.38 U	1.6 U	0.58 U	0.91 U	0.42 U
		9	0.41 U	1.7 U	0.63 U	0.98 U	0.45 U
		14	0.44 U	1.8 U	0.67 U	1.1 U	0.48 U
		(16)DUP	0.39 U	1.6 U	0.6 U	0.95 U	0.43 U
		16	0.43 U	1.8 U	0.66 U	1 U	0.48 U
		21	0.47 U	1.9 U	0.72 U	1.1 U	0.52 U
		28	0.33 U	1.4 U	0.51 U	0.8 U	0.37 U
		30.1	0.35 U	1.5 U	0.54 U	0.85 U	0.39 U
		36.5	0.35 U	1.4 U	0.54 U	0.84 U	0.38 U
		43.5	1.2 J	1.5 U	0.57 U	0.9 U	0.41 U
		48	0.31 U	1.3 U	0.47 U	0.74 U	0.34 U
		50.1	0.42 U	1.7 U	0.64 U	1 U	0.46 U
		59.5	0.37 U	1.5 U	0.57 U	0.89 U	0.41 U
		61.5	0.39 U	1.6 U	0.61 U	0.95 U	0.43 U
	Average		0.3	***	***	***	***
211-B-015	10/16/2012	3	1.6 J	1.9 U	4.5 J	1.1 U	0.5 U
		5.1	2.2 J	1.7 U	2.5 J	0.98 U	0.45 U
		13.5	4.9 J	1.6 U	0.73 J	0.93 U	0.43 U
		19.9	1 J	1.5 U	0.56 U	0.87 U	0.4 U
		21.5	170	1.5 U	6.1 J	0.85 U	0.39 U
		29.5	120	1.5 U	4.7 J	0.86 U	0.39 U
		30.5	5.4 J	2 U	0.74 U	1.2 U	0.53 U
		37	5.5 J	1.4 U	0.53 U	0.84 U	0.38 U
		41.5	37	1.7 U	0.91 J	0.98 U	0.45 U
		48.5	17	1.5 U	0.57 U	0.9 U	0.41 U
		52	39	1.7 U	0.63 U	0.99 U	0.45 U
		56	42	1.7 U	0.63 U	0.99 U	0.45 U
		60.5	67	1.6 U	0.61 U	0.95 U	0.43 U
	Average		39	***	2	***	***

Summary of Soils VOC Data for SWMU 211-B (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-016	10/17/2012	1	0.43 U	1.8 U	0.65 U	1 U	0.47 U
		5.1	0.43 U	1.8 U	0.67 U	1 U	0.48 U
		14	7.7 J	1.4 U	0.53 U	0.83 U	0.38 U
		(16)DUP	0.33 U	1.4 U	0.52 U	0.81 U	0.37 U
		16	3 J	1.6 U	0.6 U	0.93 U	0.43 U
		21.5	19	1.4 U	0.52 U	0.82 U	0.37 U
		29.5	23	1.5 U	1.1 J	0.88 U	0.4 U
		33.5	16	1.8 U	0.87 J	1 U	0.47 U
		36.5	18	1.6 U	0.6 U	0.94 U	0.43 U
		43.5	23	1.6 U	0.58 U	0.91 U	0.42 U
		48.5	31	1.7 U	0.64 U	1 U	0.46 U
		50.1	42	1.8 U	0.67 U	1 U	0.48 U
		55.1	20	1.8 U	0.69 U	1.1 U	0.49 U
		60.1	4.3 J	1.7 U	0.63 U	0.98 U	0.45 U
	Average		15	***	0.4	***	***
211-B-017	10/17/2012	4	6.1 J	1.5 U	2.4 J	0.89 U	0.41 U
		8	26	1.7 U	1.3 J	0.97 U	0.44 U
		14	28	1.8 U	0.69 U	1.1 U	0.49 U
		16	13	1.5 U	0.55 U	0.86 U	0.39 U
		23.5	13	1.5 U	0.55 U	0.86 U	0.39 U
		29.9	16	1.7 U	0.64 U	1 U	0.46 U
		30.5	39	2 U	0.73 U	1.1 U	0.53 U
		35.1	8.9 J	1.7 U	0.63 U	0.98 U	0.45 U
		44.5	120	1.7 U	0.64 U	1 U	0.46 U
		48	37	1.6 U	0.61 U	0.96 U	0.44 U
		52	20	1.5 U	0.58 U	0.9 U	0.41 U
		56	3.4 J	1.8 U	0.69 U	1.1 U	0.49 U
		62.5	0.38 U	1.6 U	0.59 U	0.93 U	0.42 U
	Average		25	***	0.6	***	***

Summary of Soils VOC Data for SWMU 211-B (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-018	10/18/2012	3.5	2.5 J	1.7 U	0.62 U	0.97 U	0.45 U
		4.9	3.3 J	1.7 U	0.64 U	1 U	0.46 U
		14	0.59 J	1.4 U	0.53 U	0.83 U	0.38 U
		19.5	0.36 U	1.5 U	0.55 U	0.86 U	0.39 U
		21	28	1.4 U	0.52 U	0.81 U	0.37 U
		28	13	2 U	0.76 U	1.2 U	0.54 U
		30.1	2.2 J	1.5 U	0.57 U	0.89 U	0.41 U
		37.5	1.9 J	1.7 U	0.63 U	0.99 U	0.45 U
		40.5	2 J	1.7 U	0.62 U	0.97 U	0.45 U
		47.5	0.37 U	1.5 U	0.57 U	0.9 U	0.41 U
		53.5	0.46 U	1.9 U	0.71 U	1.1 U	0.51 U
		58	0.38 U	1.6 U	0.58 U	0.91 U	0.41 U
		60.1	0.82 U	3.4 U	1.3 U	2 U	0.9 U
		Average	4	***	***	***	***
211-B-019	10/18/2012	2.5	10	1.5 U	1 J	0.9 U	0.41 U
		(2.5)DUP	6.7 J	1.7 U	0.66 J	1 U	0.46 U
		9.5	28	1.5 U	7 J	0.9 U	0.41 U
		12	110	1.8 U	26	1.1 U	0.49 U
		19.5	3.2 J	1.3 U	0.5 U	0.78 U	0.36 U
		23	2,700	22 U	9.3 U	7.3 U	25 U
		25.1	13,000	54 U	23 U	18 U	62 U
		32	170	1.4 U	2.4 J	0.82 U	0.37 U
		37	100	1.4 U	1.4 J	0.84 U	0.38 U
		40.5	170	1.9 U	1.6 J	1.1 U	0.52 U
		45.1	130	1.5 U	0.58 J	0.87 U	0.4 U
		54	44	1.5 U	0.57 U	0.89 U	0.41 U
		58	22	1.5 U	0.56 U	0.88 U	0.4 U
		64.5	0.46 U	1.9 U	0.71 U	1.1 U	0.51 U
		Average	1,178	***	4	***	***

Summary of Soils VOC Data for SWMU 211-B (Continued)

Station	Date Collected	Sample Depth [ft bls]	TCE [µg/kg]	1,1-DCE [µg/kg]	cis-1,2-DCE [µg/kg]	trans-1,2-DCE [µg/kg]	VC [µg/kg]
211-B-020	10/19/2012	4	4.2 J	1.7 U	0.64 U	1 U	0.46 U
		9	6.2 J	1.7 U	0.65 U	1 U	0.47 U
		13.5	12	1.8 U	0.66 U	1 U	0.48 U
		19.5	36	1.4 U	0.52 U	0.81 U	0.37 U
		22	20	1.5 U	0.55 U	0.86 U	0.4 U
		28	12	1.6 U	0.6 U	0.94 U	0.43 U
		30.1	0.34 U	1.4 U	0.52 U	0.81 U	0.37 U
		39.5	9.2 J	1.6 U	0.6 U	0.94 U	0.43 U
		40.1	12	1.6 U	0.6 U	0.94 U	0.43 U
		48.5	12	1.6 U	0.61 U	0.95 U	0.44 U
		50.5	7.3 J	1.5 U	0.58 U	0.9 U	0.41 U
		59.5	1.6 J	1.5 U	0.55 U	0.87 U	0.4 U
		61	4.6 J	1.8 U	0.67 U	1.1 U	0.48 U
		Average	11	***	***	***	***

Notes:

- Groundwater Protection Remediation Goals from Remedial Design Work Plan for Solid Waste Management Units 1, 211-A, and 211-B Volatile Organic Compound Sources for the Southwest Groundwater Plume at the Paducah Gaseous Diffusion Plant, Paducah, Kentucky, (DOE 2012a).
- J - Indicates an estimated value.
- U - Compound analyzed for but not detected at or below the lowest concentration reported.
- DUP - Indicated that a duplicate sample was taken for the interval given in parentheses.
- Sample depth represents the discrete depth at which an EnCore® sample was taken.
- For "U" qualified samples a value of one half the concentration reported was used in calculating the average borehole concentration.
- *** - Indicates average concentration not calculated as all boring samples were "U" qualified for specific VOC.
- Yellow shading and bold text indicate an exceedance of Groundwater Protection Remediation Goals.
- Soil boring 211-B-014 was collected and archived. Boring was not logged or screened for VOC impacts.